



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®2006 = 52.8

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECint_base2006 = 49.6

CPU2006 license: 13


Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Sep-2011

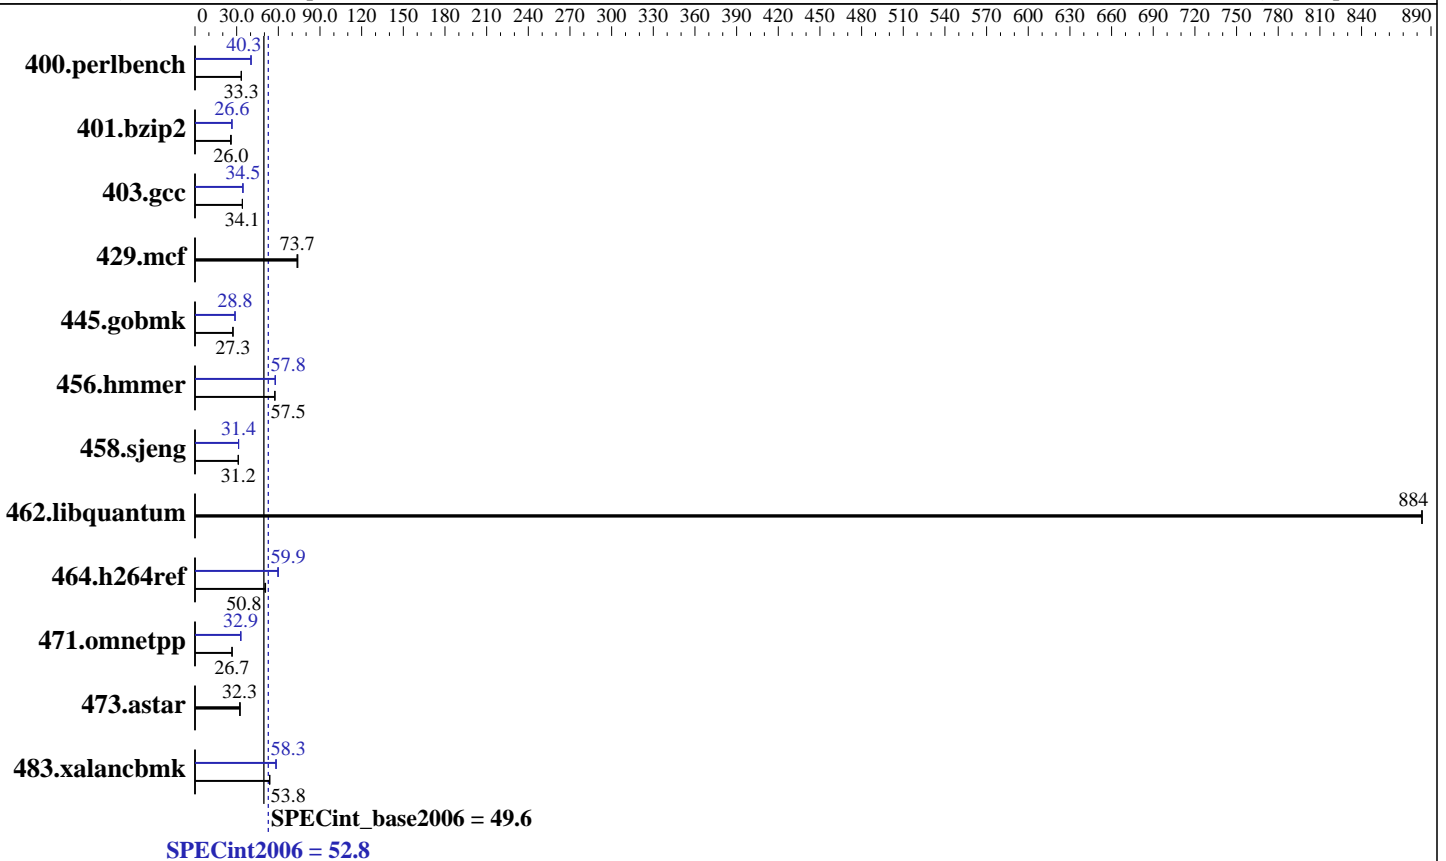

Hardware

CPU Name: Intel Core i7-2600K
 CPU Characteristics: Intel Turbo Boost Technology up to 3.8 GHz
 CPU MHz: 3401
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
 Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1
 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 5 (X11)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 52.8

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECint_base2006 = 49.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Aug-2011

Hardware Availability: May-2011

Software Availability: Sep-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	293	33.3	<u>293</u>	<u>33.3</u>	293	33.4	<u>242</u>	<u>40.3</u>	242	40.3	242	40.3
401.bzip2	377	25.6	371	26.0	<u>371</u>	<u>26.0</u>	<u>363</u>	<u>26.6</u>	363	26.6	363	26.6
403.gcc	235	34.2	<u>236</u>	<u>34.1</u>	236	34.1	<u>233</u>	<u>34.5</u>	234	34.5	233	34.5
429.mcf	123	74.1	<u>124</u>	<u>73.7</u>	124	73.5	123	74.1	<u>124</u>	<u>73.7</u>	124	73.5
445.gobmk	384	27.3	384	27.3	<u>384</u>	<u>27.3</u>	364	28.8	<u>364</u>	<u>28.8</u>	364	28.8
456.hammer	162	57.5	162	57.5	<u>162</u>	<u>57.5</u>	161	57.8	<u>161</u>	<u>57.8</u>	162	57.8
458.sjeng	388	31.2	<u>388</u>	<u>31.2</u>	388	31.2	385	31.4	386	31.4	<u>386</u>	<u>31.4</u>
462.libquantum	23.5	883	<u>23.5</u>	<u>884</u>	23.4	884	<u>23.5</u>	883	<u>23.5</u>	<u>884</u>	23.4	884
464.h264ref	<u>436</u>	<u>50.8</u>	440	50.3	435	50.8	369	59.9	<u>370</u>	<u>59.9</u>	371	59.7
471.omnetpp	<u>234</u>	<u>26.7</u>	235	26.6	234	26.7	190	32.9	<u>190</u>	<u>32.9</u>	189	33.0
473.astar	<u>218</u>	<u>32.3</u>	218	32.2	216	32.5	<u>218</u>	<u>32.3</u>	218	32.2	216	32.5
483.xalancbmk	128	53.9	<u>128</u>	<u>53.8</u>	129	53.7	118	58.3	<u>118</u>	<u>58.3</u>	118	58.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/spec/cpu2006.1.2/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c
running on rhel61-rahul.sc.intel.com Fri Aug 19 09:55:05 2011

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Core(TM) i7-2600K CPU @ 3.40GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal: 7966960 kB
HugePages_Total: 0
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 52.8

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECint_base2006 = 49.6

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Sep-2011

Platform Notes (Continued)

Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux rhel61-rahul.sc.intel.com 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Aug 19 09:53
```

```
SPEC is set to: /home/spec/cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_rhel61rahul-lv_home
                ext4      862G  3.7G  815G   1% /home
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
```

```
LD_LIBRARY_PATH = "/home/spec/cpu2006.1.2/smartheap:/home/spec/cpu2006.1.2/ic12.1-libs/ia32:/home/spec/cpu2006.1.2/ic12.1-libs/intel64"
```

```
OMP_NUM_THREADS = "4"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory
using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 52.8

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECint_base2006 = 49.6

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Sep-2011

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 52.8

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECint_base2006 = 49.6

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Sep-2011

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
            -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias
             -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 52.8

Intel DZ68DB motherboard (Intel Core i7-2600K)

SPECint_base2006 = 49.6

CPU2006 license: 13

Test date: Aug-2011

Test sponsor: Intel Corporation

Hardware Availability: May-2011

Tested by: Intel Corporation

Software Availability: Sep-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Intel-Platform-Settings-V1.2-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Intel-Platform-Settings-V1.2-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 01:43:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 October 2011.