



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 1830

ProLiant DL980 G7 (2.0 GHz, Intel Xeon E7-2850)

SPECint_rate_base2006 = 1740

CPU2006 license: 3


Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Aug-2011

Tested by: Hewlett-Packard Company

Software Availability: Jan-2011

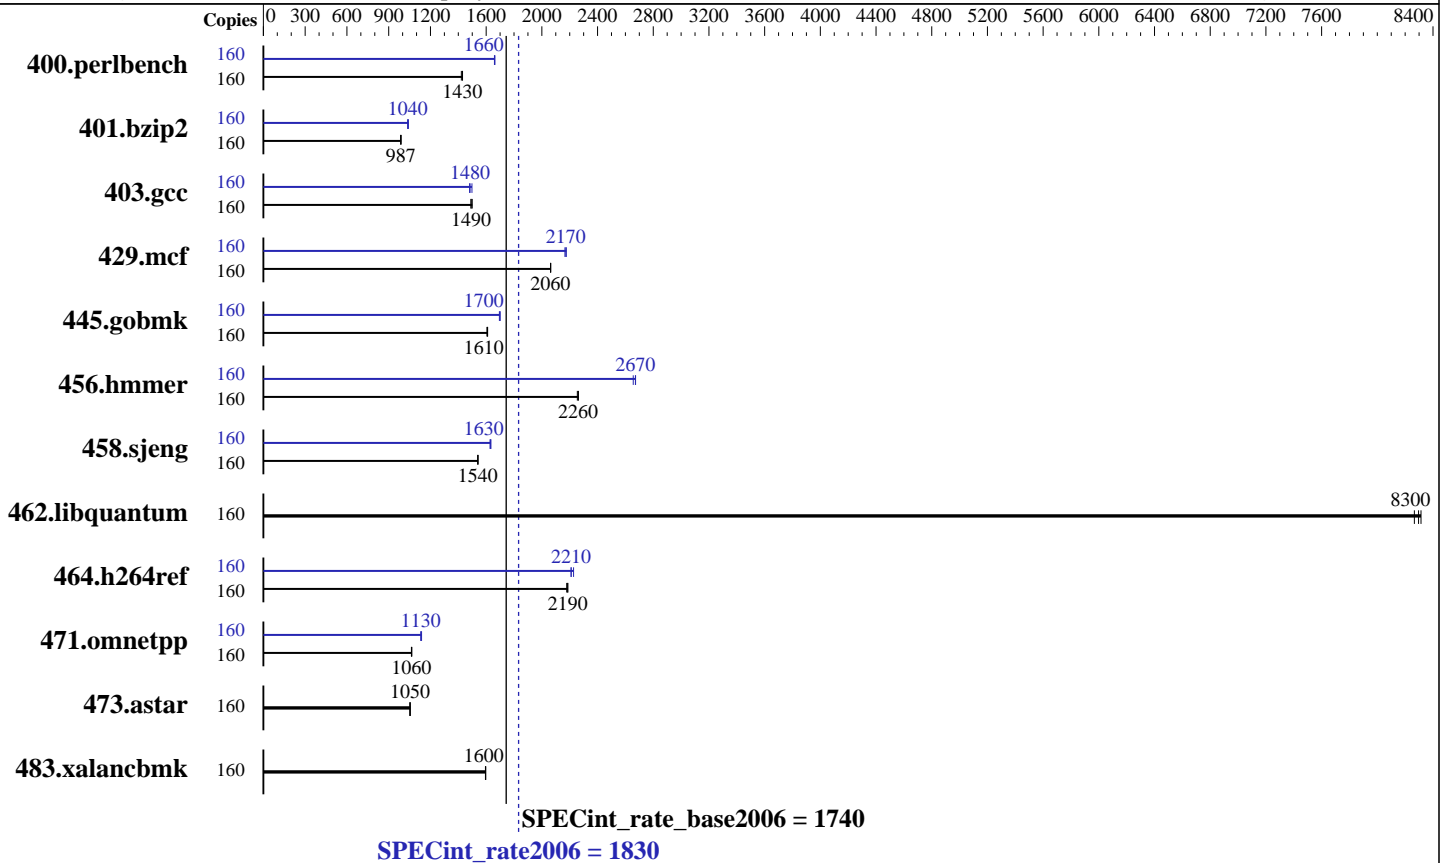

Hardware

CPU Name: Intel Xeon E7-2850
 CPU Characteristics: Intel Turbo Boost Technology up to 2.4 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 80 cores, 8 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 4, 8 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (128 x 8 GB 2Rx4 PC3L-10600R-9, ECC, running at 1066 MHz)
 Disk Subsystem: 2 x 146 GB 15 K SAS
 Other Hardware: 512 MB FBWC Module for P410i SmartArray

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE 2011 for IA-32 and Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1830

ProLiant DL980 G7 (2.0 GHz, Intel Xeon E7-2850)

SPECint_rate_base2006 = 1740

CPU2006 license: 3

Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Aug-2011

Tested by: Hewlett-Packard Company

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	160	1100	1420	1093	1430	1094	1430	160	941	1660	941	1660	942	1660
401.bzip2	160	1564	987	1561	989	1567	986	160	1487	1040	1490	1040	1483	1040
403.gcc	160	863	1490	864	1490	859	1500	160	868	1480	860	1500	870	1480
429.mcf	160	708	2060	708	2060	707	2060	160	671	2180	674	2170	672	2170
445.gobmk	160	1045	1610	1043	1610	1042	1610	160	988	1700	990	1690	988	1700
456.hammer	160	662	2250	660	2260	660	2260	160	559	2670	562	2660	558	2670
458.sjeng	160	1257	1540	1256	1540	1258	1540	160	1189	1630	1186	1630	1185	1630
462.libquantum	160	400	8300	401	8270	399	8310	160	400	8300	401	8270	399	8310
464.h264ref	160	1620	2190	1620	2190	1625	2180	160	1589	2230	1602	2210	1602	2210
471.omnetpp	160	939	1060	941	1060	938	1070	160	884	1130	884	1130	880	1140
473.astar	160	1065	1050	1068	1050	1066	1050	160	1065	1050	1068	1050	1066	1050
483.xalancbmk	160	692	1600	692	1590	692	1600	160	692	1600	692	1590	692	1600

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
SPEC files placed in /dev/shm/cpu2006 with /dev/shm, size=500G
mounted as tmpfs with mpol=interleave
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'nodedev /mnt/hugetlbfs hugetlbfs defaults 0 0' added to /etc/fstab
echo 160000 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Regulator set to HP Static High Performance Mode

General Notes

Binaries were compiled on RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1830

ProLiant DL980 G7 (2.0 GHz, Intel Xeon E7-2850)

SPECint_rate_base2006 = 1740

CPU2006 license: 3

Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Aug-2011

Tested by: Hewlett-Packard Company

Software Availability: Jan-2011

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1830

ProLiant DL980 G7 (2.0 GHz, Intel Xeon E7-2850)

SPECint_rate_base2006 = 1740

CPU2006 license: 3

Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Aug-2011

Tested by: Hewlett-Packard Company

Software Availability: Jan-2011

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 1830

ProLiant DL980 G7 (2.0 GHz, Intel Xeon E7-2850)

SPECint_rate_base2006 = 1740

CPU2006 license: 3

Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Aug-2011

Tested by: Hewlett-Packard Company

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:39:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 October 2011.