



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 783

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECint_rate_base2006 = 737

CPU2006 license: 9006


Test date: Aug-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

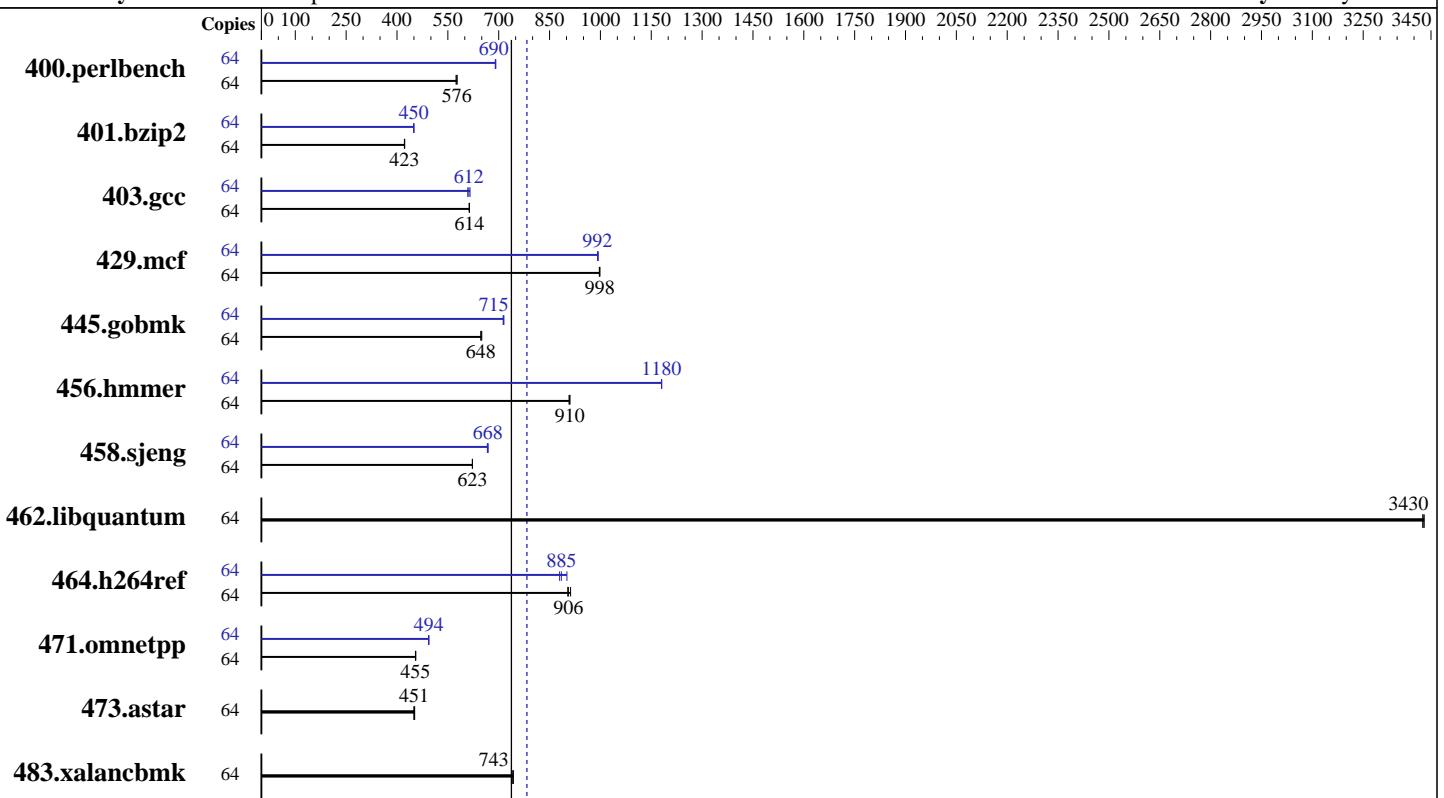

SPECint_rate_base2006 = 737

SPECint_rate2006 = 783

Hardware

CPU Name: Intel Xeon E7-8830
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (64 x 4 GB 2Rx4 PC3-8500R-7, ECC)
 Disk Subsystem: 2x300 GB SAS, 10000 RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64 on an x86_64
 Compiler: C/C++: Version 12.0.4.191 of Intel Compiler XE for applications on IA-32 Build 20110427
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECint_rate2006 = 783

CPU2006 license: 9006

Test date: Aug-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1085	576	1083	577	1089	574	64	906	690	906	690	904	692
401.bzip2	64	1462	423	1464	422	1462	423	64	1373	450	1373	450	1376	449
403.gcc	64	839	614	839	614	841	613	64	842	612	846	609	837	615
429.mcf	64	585	998	586	997	585	998	64	589	991	589	992	587	994
445.gobmk	64	1033	650	1037	648	1037	648	64	941	713	939	715	939	715
456.hammer	64	656	910	658	907	656	910	64	506	1180	506	1180	506	1180
458.sjeng	64	1244	623	1244	623	1244	622	64	1162	667	1158	669	1160	668
462.libquantum	64	387	3430	387	3430	387	3430	64	387	3430	387	3430	387	3430
464.h264ref	64	1567	904	1553	912	1564	906	64	1610	880	1572	901	1601	885
471.omnetpp	64	879	455	879	455	880	455	64	810	494	810	494	811	493
473.astar	64	996	451	994	452	999	450	64	996	451	994	452	999	450
483.xalancbmk	64	595	743	595	743	595	742	64	595	743	595	743	595	742

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
echo 1 > /proc/sys/vm/zone_reclaim_mode
Huge pages were not configured for this run

Platform Notes

Patrol Scrubbing set to disabled in Maintenance Console

General Notes

The Express5800/A1080a-S and the Express5800/A1080a-D models are electronically equivalent.
The results have been measured on the Express5800/A1080a-S model.
Binaries were compiled on RHEL 5.6

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECint_rate2006 = 783

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Aug-2011

Hardware Availability: Nov-2011

Software Availability: May-2011

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_9/lib -lsmartheap
-B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

401.bzip2: `icc -m64`

456.hmmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECint_rate2006 = 783

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Aug-2011

Hardware Availability: Nov-2011

Software Availability: May-2011

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
  -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
  -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -unroll14 -auto-ilp32
  -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
  -L/opt/SmartHeap_9/lib -lsmartheap
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECint_rate2006 = 783

CPU2006 license: 9006

Test date: Aug-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110705.html>

<http://www.spec.org/cpu2006/flags/NEC-platform-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110705.xml>

<http://www.spec.org/cpu2006/flags/NEC-platform-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 01:46:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 October 2011.