



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 3150

IBM Power 780 (3.44 GHz, 96 core)

SPECfp_rate_base2006 = 2840

CPU2006 license: 11


Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

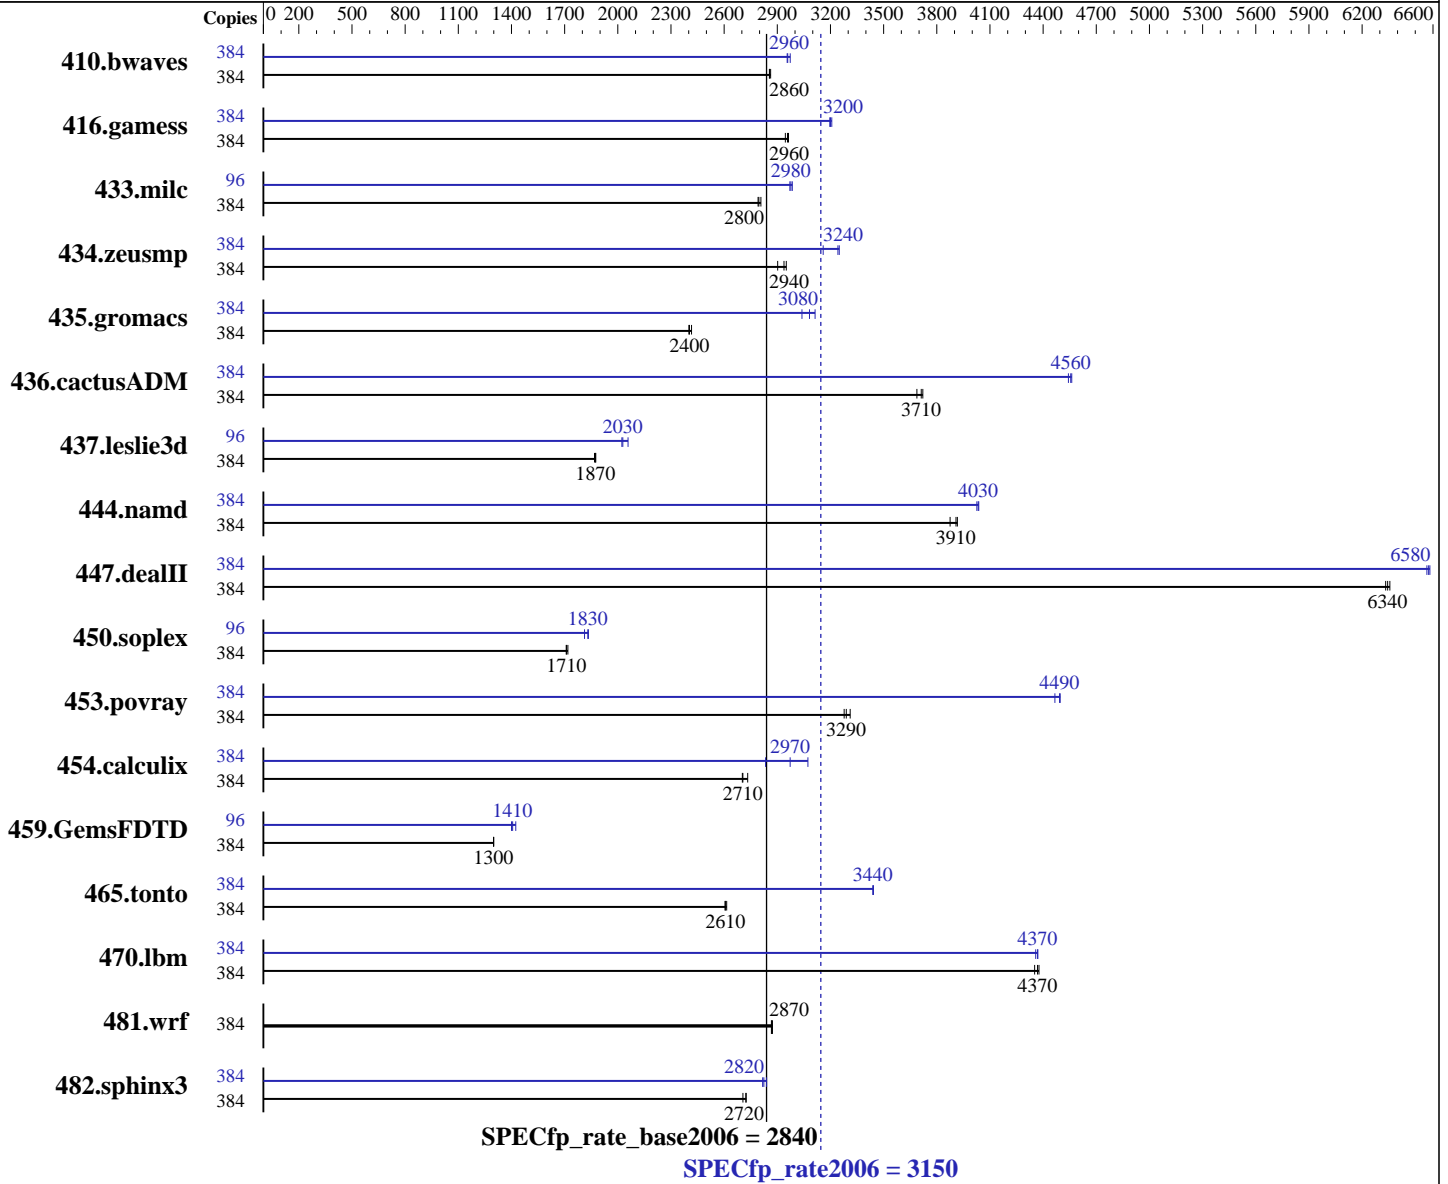

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.780 GHz
 CPU MHz: 3444
 FPU: Integrated
 CPU(s) enabled: 96 cores, 16 chips, 6 cores/chip, 4 threads/core
 CPU(s) orderable: 24,48,72,96 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core

Software

Operating System: IBM AIX V7.1
 Compiler: C/C++: Version 11.1 of IBM XL C/C++ for AIX; Fortran: Version 13.1 of IBM XL Fortran for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3150

IBM Power 780 (3.44 GHz, 96 core)

SPECfp_rate_base2006 = 2840

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2011
Hardware Availability: Oct-2011
Software Availability: Oct-2011

Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 4 MB I+D on chip per core
Other Cache: None
Memory: 1 TB (64 x 16 GB) DDR3 1066 MHz
Disk Subsystem: 12 x 146.8 GB Raid0 SAS SFF 15K RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	384	1827	2860	1823	2860	1828	2860	384	1764	2960	1755	2970	1766	2960
416.gamess	384	2537	2960	2553	2950	2542	2960	384	2352	3200	2350	3200	2344	3210
433.milc	384	1261	2800	1256	2810	1263	2790	96	296	2980	295	2980	297	2970
434.zeusmp	384	1184	2950	1204	2900	1189	2940	384	1106	3160	1075	3250	1078	3240
435.gromacs	384	1140	2400	1135	2420	1142	2400	384	890	3080	902	3040	881	3110
436.cactusADM	384	1236	3710	1233	3720	1244	3690	384	1010	4540	1007	4560	1006	4560
437.leslie3d	384	1925	1870	1932	1870	1925	1880	96	439	2060	446	2020	445	2030
444.namd	384	786	3920	795	3880	788	3910	384	765	4030	764	4030	763	4040
447.dealII	384	694	6330	692	6340	691	6360	384	668	6580	669	6570	667	6580
450.soplex	384	1872	1710	1874	1710	1864	1720	96	442	1810	437	1830	437	1830
453.povray	384	617	3310	623	3280	621	3290	384	457	4470	454	4500	455	4490
454.calculix	384	1171	2710	1159	2730	1172	2700	384	1118	2830	1031	3070	1066	2970
459.GemsFDTD	384	3136	1300	3137	1300	3135	1300	96	715	1420	727	1400	724	1410
465.tonto	384	1445	2610	1450	2610	1449	2610	384	1098	3440	1098	3440	1098	3440
470.lbm	384	1208	4370	1206	4380	1212	4350	384	1208	4370	1207	4370	1211	4360
481.wrf	384	1495	2870	1493	2870	1496	2870	384	1495	2870	1493	2870	1496	2870
482.sphinx3	384	2747	2720	2766	2710	2749	2720	384	2650	2820	2636	2840	2657	2820

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler update to August 2011 PTF
Version: 11.01.0000.0007
Fortran compiler updated to August 2011 PTF
Version: 13.01.0000.0007

Peak Tuning Notes

fdpr binary optimization tool used for 416.gamess
with options -O4 -cbpth -1 -sdp -1 -m power7
fdpr binary optimization tool used for 433.milc
with options -O4 -nodp -m power7
fdpr binary optimization tool used for 434.zeusmp
with options -O4 -vrox -nodp -m power7

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3150

IBM Power 780 (3.44 GHz, 96 core)

SPECfp_rate_base2006 = 2840

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2011

Hardware Availability: Oct-2011

Software Availability: Oct-2011

Peak Tuning Notes (Continued)

fdpr binary optimization tool used for 436.cactusADM
 with options -O3 -lu -1 -nodp -sdp 9 -m power7
 fdpr binary optimization tool used for 437.leslie3d
 with options -O4 -vrox -m power7
 fdpr binary optimization tool used for 450.soplex
 with options -O3 -lu -1 -nodp -sdp 9 -m power7
 fdpr binary optimization tool used for 453.povray
 with options -O3 -cbpth -1 -m power7
 fdpr binary optimization tool used for 459.GemsFDTD
 with options -O3 -cbpth -1 -m power7
 fdpr binary optimization tool used for 465.tonto
 with options -O4 -m power7
 fdpr binary optimization tool used for 482.sphinx3
 with options -O4 -rcctf 0 -sdp 9 -vrox -m power7

Submit Notes

The config file option 'submit' was used
 to assign benchmark copy to specific kernel thread using
 the "bindprocessor" command (see flags file for details).

Operating System Notes

AIX updated to V7.1 TL 1 SP 1 (7.1.1.1)
 All ulimits set to unlimited.
 38400 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:
 MALLOCOPTIONS = "pool"
 MEMORY_AFFINITY = "MCM"
 XLFRTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:
 /usr/vac/bin/xlc -qlanglvl=extc99
 C++ benchmarks:
 /usr/vacpp/bin/xlC
 Fortran benchmarks:
 /usr/bin/xlf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3150

IBM Power 780 (3.44 GHz, 96 core)

SPECfp_rate_base2006 = 2840

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Base Portability Flags

```

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

```

Base Optimization Flags

C benchmarks:

```
-qipa=threads -bmaxdata:0x40000000 -qlargepage -O5 -D_ILS_MACROS
-blpdata
```

C++ benchmarks:

```
-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnvml
-D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5 -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3150

IBM Power 780 (3.44 GHz, 96 core)

SPECfp_rate_base2006 = 2840

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -qipa=threads -bmaxdata:0x40000000 -O5 -qlargepage
-D_ILS_MACROS -qrestrict -qprefetch=aggressive
-qalign=natural -blpdata -btextpsize:64K

470.lbm: -qipa=threads -bmaxdata:0x30000000 -O5 -D_ILS_MACROS
-blpdata -btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3150

IBM Power 780 (3.44 GHz, 96 core)

SPECfp_rate_base2006 = 2840

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2011

Hardware Availability: Oct-2011

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

444.namd: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64
-qsimd -qvecnv1 -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

447.dealII: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O4 -qsimd -qvecnv1 -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR
-blpdata -btextpsize:64K

450.soplex: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -q64 -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

453.povray: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-qvecnv1 -qlargepage -D_ILS_MACROS -qalign=natural
-blpdata -btextpsize:64K

Fortran benchmarks:

410.bwaves: -qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage
-qsmallstack=dynlenonheap -blpdata -btextpsize:64K

416.gamess: -qipa=threads -bmaxdata:0x40000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qarch=pwr5 -qlargepage -qalias=nostd
-blpdata -btextpsize:64K

434.zeusmp: -bmaxdata:0x40000000 -O3 -qarch=auto -qtune=auto
-qlargepage -qxlf90=nosignedzero -blpdata -btextpsize:64K

437.leslie3d: -qipa=threads -O5 -q64 -blpdata -btextpsize:64K

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -q64 -qlargepage
-blpdata -btextpsize:64K

465.tonto: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnv1 -blpdata
-btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-qvecnv1 -D_ILS_MACROS -bdatapsize:64K -bstackpsize:64K
-btextpsize:64K

436.cactusADM: -qipa=threads -bmaxdata:0x60000000 -O4 -qsimd -qvecnv1
-D_ILS_MACROS -qnostrict -blpdata -btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 3150

IBM Power 780 (3.44 GHz, 96 core)

SPECfp_rate_base2006 = 2840

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2011

Hardware Availability: Oct-2011

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

454.calculix: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvml -qlargepage -D_ILS_MACROS -bdatapsize:64K
-bstacksize:64K -btextpsize:64K

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

434.zeusmp: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 01:29:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 December 2011.