



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2770

IBM Power 780 (3.92 GHz, 64 core)

SPECint_rate_base2006 = 2420

CPU2006 license: 11


Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

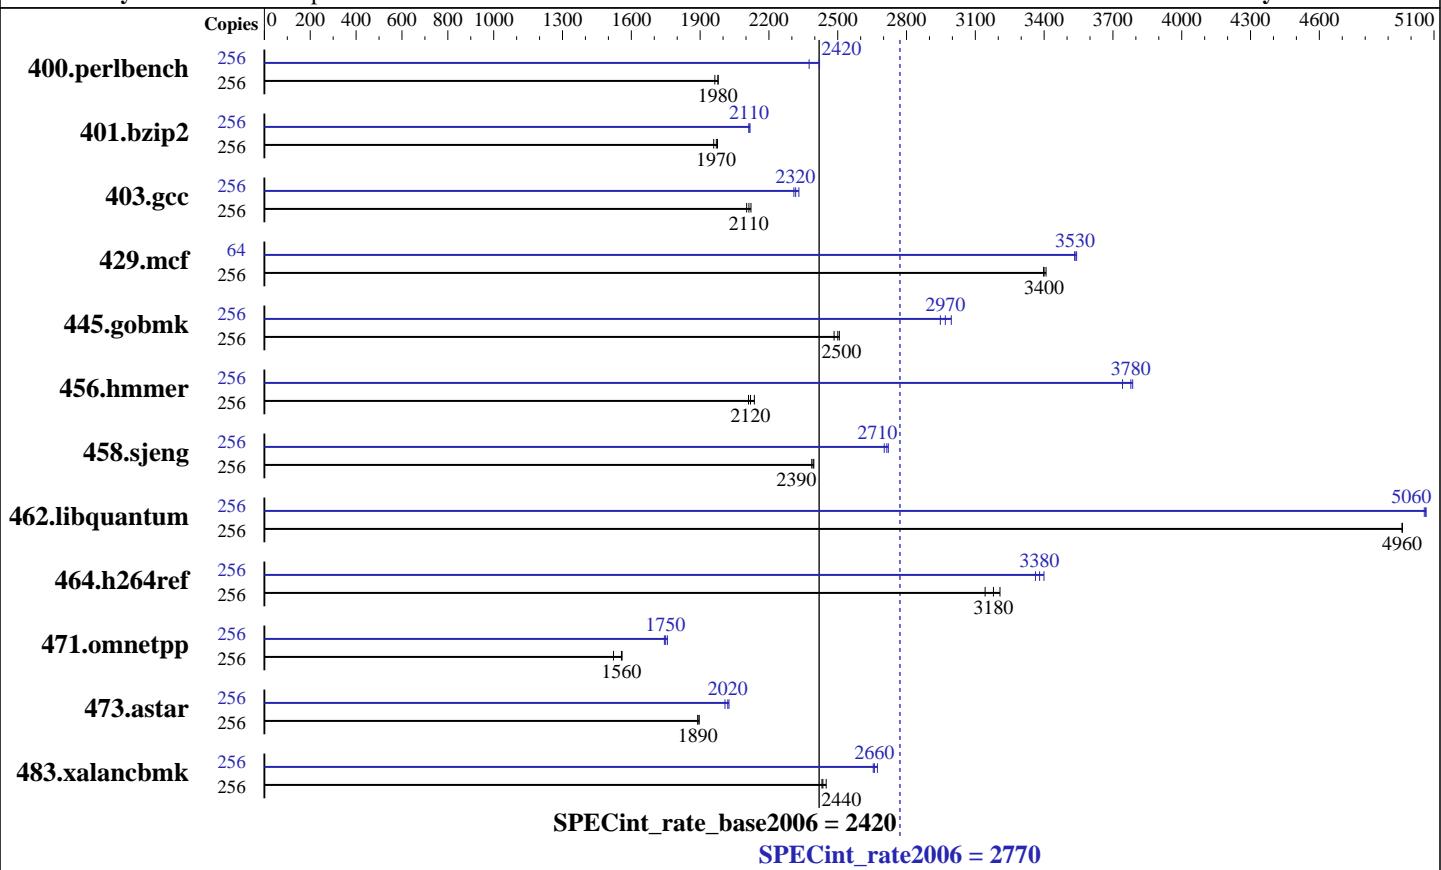

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.948 GHz
 CPU MHz: 3920
 FPU: Integrated
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 16,32,48,64 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 512 GB (64 x 8 GB) DDR3 1066 MHz
 Disk Subsystem: 12 x 146.8 GB Raid0 SAS SFF 15K RPM
 Other Hardware: None

Software

Operating System: IBM AIX V7.1
 Compiler: C/C++: Version 11.1 of IBM XL C/C++ for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2770

IBM Power 780 (3.92 GHz, 64 core)

SPECint_rate_base2006 = 2420

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	256	1273	1960	1265	1980	1264	1980	256	1053	2380	1033	2420	1034	2420
401.bzip2	256	1254	1970	1261	1960	1250	1980	256	1169	2110	1167	2120	1169	2110
403.gcc	256	975	2110	971	2120	980	2100	256	893	2310	884	2330	890	2320
429.mcf	256	685	3410	687	3400	687	3400	64	165	3540	165	3530	165	3530
445.gobmk	256	1074	2500	1071	2510	1081	2480	256	897	3000	904	2970	911	2950
456.hammer	256	1127	2120	1131	2110	1118	2140	256	631	3790	632	3780	638	3740
458.sjeng	256	1295	2390	1293	2400	1298	2390	256	1139	2720	1146	2700	1141	2710
462.libquantum	256	1069	4960	1069	4960	1069	4960	256	1049	5060	1047	5070	1047	5060
464.h264ref	256	1803	3140	1766	3210	1782	3180	256	1685	3360	1667	3400	1676	3380
471.omnetpp	256	1026	1560	1028	1560	1051	1520	256	917	1740	910	1760	914	1750
473.astar	256	951	1890	951	1890	948	1900	256	889	2020	895	2010	887	2030
483.xalancbmk	256	721	2450	725	2440	727	2430	256	664	2660	661	2670	665	2650

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler update to August 2011 PTF
Version: 11.01.0000.0007

Peak Tuning Notes

```

fdpr binary optimization tool used for 400.perlbench
with options -O4 -cbpth -1 -sdp -1 -m power7
fdpr binary optimization tool used for 401.bzip2
with options -O4 -vrox -m power7
fdpr binary optimization tool used for 403.gcc
with options -O4 -cbpth -1 -sdp -1 -m power7
fdpr binary optimization tool used for 429.mcf
with options -O4 -nobp -m power7
fdpr binary optimization tool used for 445.gobmk
with options -O3 -m power7
fdpr binary optimization tool used for 456.hammer
with options -O3 -lu -1 -nodp -sdp 9 -m power7
fdpr binary optimization tool used for 458.sjeng
with options -O3 -m power7
fdpr binary optimization tool used for 462.libquantum
with options -O4 -cbpth -1 -sdp -1 -m power7
fdpr binary optimization tool used for 464.h264ref
with options -O4 -rcctf 0 -vrox -RD -m power7
fdpr binary optimization tool used for 471.omnetpp
with options -O3 -cbpth -1 -m power7
fdpr binary optimization tool used for 473.astar
with options -O3 -cbpth -1 -m power7

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2770

IBM Power 780 (3.92 GHz, 64 core)

SPECint_rate_base2006 = 2420

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Peak Tuning Notes (Continued)

fdpr binary optimization tool used for 483.xalancbmk
with options -O4 -rcctf 0 -nobp -m power7

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).

Operating System Notes

AIX updated to V7.1 TL 1 SP 1 (7.1.1.1)

All ulimits set to unlimited.

25600 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLF RTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -D_ILS_MACROS
-qalias=noansi -qalloc -blpdata

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2770

IBM Power 780 (3.92 GHz, 64 core)

SPECint_rate_base2006 = 2420

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Base Optimization Flags (Continued)

C++ benchmarks:

```
-qipa=threads -bmaxdata:0x20000000 -qlargepage -O4 -qsimd -qvecnvol  
-D_ILS_MACROS -qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_AIX  
462.libquantum: -DSPEC_CPU_AIX  
464.h264ref: -DSPEC_CPU_AIX -qchars=signed  
483.xalancbmk: -DSPEC_CPU_AIX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2  
-qarch=auto -qtune=auto -D_ILS_MACROS -qalias=noansi  
-blpdata -btextpsize:64K  
  
401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -blpdata  
-btextpsize:64K
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2770

IBM Power 780 (3.92 GHz, 64 core)

SPECint_rate_base2006 = 2420

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
 -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage
 -D_ILS_MACROS -qalloca -blpdata -btextpsize:64K

429.mcf: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
 -qpdf2(pass 2) -O5 -qsimd -qvecnvol -qlargepage
 -D_ILS_MACROS -blpdata -btextpsize:64K

445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4
 -qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K

456.hmmr: -qipa=threads -O5 -qsimd -qvecnvol -qassert=refalign
 -D_ILS_MACROS -blpdata -btextpsize:64K

458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
 -D_ILS_MACROS -blpdata -btextpsize:64K

462.libquantum: -qipa=threads -O5 -q64 -qlargepage -D_ILS_MACROS
 -blpdata -btextpsize:64K

464.h264ref: Same as 458.sjeng

C++ benchmarks:

471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
 -qpdf2(pass 2) -O4 -D_ILS_MACROS -qalign=natural
 -qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
 -blpdata -btextpsize:64K

473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
 -qpdf2(pass 2) -O4 -qsimd -qvecnvol -qlargepage
 -D_ILS_MACROS -qinlglue -qalign=natural -blpdata
 -btextpsize:64K

483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
 -qpdf2(pass 2) -O4 -qsimd -qvecnvol -qarch=pwr5
 -qtune=pwr5 -qlargepage -D_ILS_MACROS -qinlglue
 -D__IBM_FAST_VECTOR -blpdata -btextpsize:64K

Peak Other Flags

C benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

400.perlbench: -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2770

IBM Power 780 (3.92 GHz, 64 core)

SPECint_rate_base2006 = 2420

CPU2006 license: 11

Test date: Sep-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Oct-2011

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 01:29:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 December 2011.