



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6238

SPECfp[®]_rate2006 = 333

SPECfp_rate_base2006 = 311

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

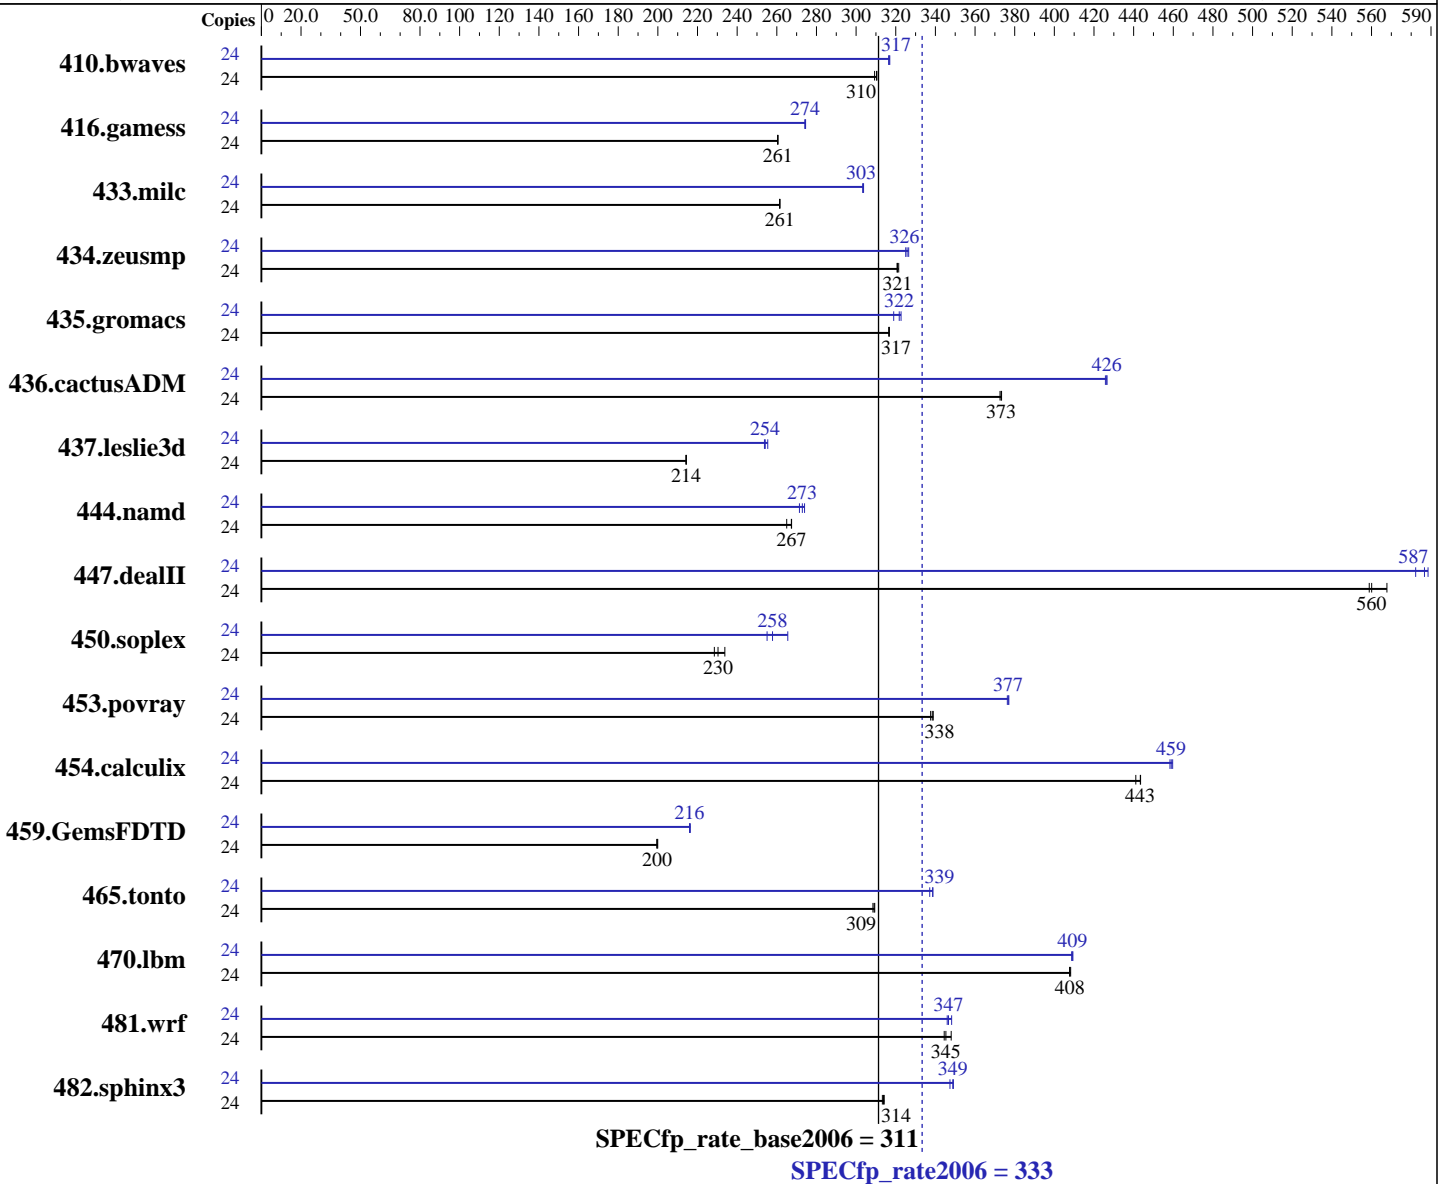

Hardware

CPU Name: AMD Opteron 6238
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
 Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64
 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6238

SPECfp_rate2006 = 333

SPECfp_rate_base2006 = 311

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores

Other Cache: None

Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 500 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1054	309	1050	310	<u>1051</u>	<u>310</u>	24	1029	317	<u>1030</u>	<u>317</u>	1031	316		
416.gamess	24	1803	261	<u>1804</u>	<u>261</u>	1804	260	24	1712	275	1714	274	<u>1713</u>	<u>274</u>		
433.milc	24	842	262	<u>843</u>	<u>261</u>	843	261	24	<u>726</u>	<u>303</u>	726	303	725	304		
434.zeusmp	24	681	321	<u>681</u>	<u>321</u>	679	321	24	672	325	<u>671</u>	<u>326</u>	669	327		
435.gromacs	24	<u>541</u>	<u>317</u>	541	317	541	316	24	537	319	<u>533</u>	<u>322</u>	531	323		
436.cactusADM	24	<u>769</u>	<u>373</u>	770	373	768	373	24	672	427	<u>673</u>	<u>426</u>	674	426		
437.leslie3d	24	<u>1053</u>	<u>214</u>	1052	214	1053	214	24	883	255	<u>888</u>	<u>254</u>	889	254		
444.namd	24	726	265	720	267	<u>720</u>	<u>267</u>	24	<u>705</u>	<u>273</u>	709	271	702	274		
447.dealII	24	<u>490</u>	<u>560</u>	484	568	491	559	24	467	589	<u>468</u>	<u>587</u>	472	582		
450.soplex	24	876	228	<u>869</u>	<u>230</u>	856	234	24	<u>776</u>	<u>258</u>	785	255	754	266		
453.povray	24	377	339	378	338	<u>377</u>	<u>338</u>	24	339	376	339	377	<u>339</u>	<u>377</u>		
454.calculix	24	446	443	<u>447</u>	<u>443</u>	449	441	24	432	458	<u>431</u>	<u>459</u>	431	460		
459.GemsFDTD	24	1274	200	<u>1275</u>	<u>200</u>	1277	199	24	1177	216	<u>1179</u>	<u>216</u>	1179	216		
465.tonto	24	763	309	<u>764</u>	<u>309</u>	766	308	24	700	337	<u>697</u>	<u>339</u>	697	339		
470.lbm	24	808	408	809	408	<u>809</u>	<u>408</u>	24	<u>806</u>	<u>409</u>	806	409	807	409		
481.wrf	24	<u>776</u>	<u>345</u>	770	348	778	344	24	770	348	775	346	<u>773</u>	<u>347</u>		
482.sphinx3	24	1489	314	1493	313	<u>1491</u>	<u>314</u>	24	1347	347	1340	349	<u>1341</u>	<u>349</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6238

SPECfp_rate2006 = 333

SPECfp_rate_base2006 = 311

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Operating System Notes (Continued)

Set kernel/randomize_va_space=0 in /etc/sysctl.conf

Set vm/nr_hugepages=11520 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "480"

LD_LIBRARY_PATH = "/root/work/cpu2006v1.1/amd1104-rate-libs-revA/32:/root/work/cpu2006v1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6238

SPECfp_rate2006 = 333

SPECfp_rate_base2006 = 311

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso -LNO:blocking=off
-OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6238

SPECfp_rate2006 = 333

SPECfp_rate_base2006 = 311

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
      -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
      -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
      -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
      -OPT:unroll_times_max=8 -OPT:unroll_size=256
      -OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
      -IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
      -CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
      -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
      -CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
      -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
      -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
      -fno-emit-exceptions -m32 -OPT:unroll_times_max=8
      -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
      -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
      -TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
      -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
      -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6238

SPECfp_rate2006 = 333

SPECfp_rate_base2006 = 311

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex (continued):

```
-OPT:fold_unsigned_relops=on -fno-exceptions -m32
-HP:bdt=2m:heap=2m -WOPT:sib=on
```

453.povray:

```
-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0
```

Fortran benchmarks:

410.bwaves:

```
-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:ignore_feedback=off -LNO:fu=4
-LNO:loop_model_simd=on -LNO:simd_rm_unity_remainder=on
-WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp_peep=on
```

416.gamess:

```
-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on
```

434.zeusmp:

```
-march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off
-HP:bdt=2m:heap=2m
```

437.leslie3d:

```
-march=bdver1 -Ofast -CG:pre_minreg_level=2 -LNO:simd=0
-LNO:fusion=2 -HP:bdt=2m:heap=2m -mso
```

459.GemsFDTD:

```
-march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP
```

465.tonto:

```
-march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-HP:bdt=2m:heap=2m
```

Benchmarks using both Fortran and C:

435.gromacs:

```
-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m
```

436.cactusADM:

```
-march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP -CG:locs_shallow_depth=1 -CG:load_exe=0
-WOPT:sib=on
```

454.calculix:

```
-march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6238

SPECfp_rate2006 = 333

SPECfp_rate_base2006 = 311

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Sep-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

```
481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on
        -CG:load_exe=1 -HP -WOPT:sib=on
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>
<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>
<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:00:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 November 2011.