



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint®\_rate2006 = 85.8

### IBM System x3250 M4 (Intel Core i3-2100)

SPECint\_rate\_base2006 = 81.9

CPU2006 license: 11


Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

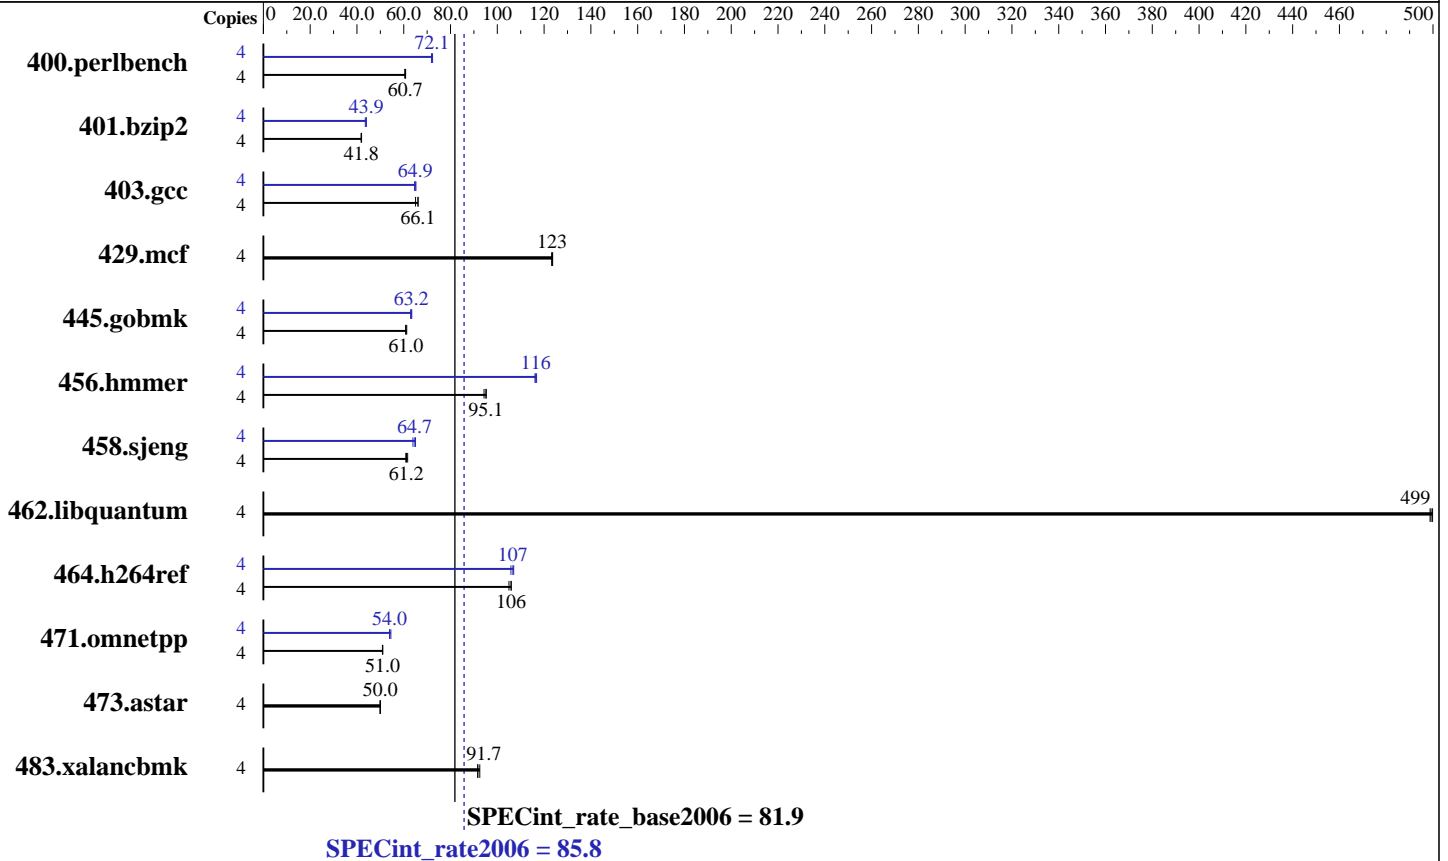

### Hardware

CPU Name: Intel Core i3-2100  
 CPU Characteristics:  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-10600E-9, ECC)  
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel Compiler XE Build 20110803  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 85.8

IBM System x3250 M4 (Intel Core i3-2100)

SPECint\_rate\_base2006 = 81.9

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>644</b>	<b>60.7</b>	643	60.8	647	60.4	4	544	71.9	540	72.3	<b>542</b>	<b>72.1</b>
401.bzip2	4	<b>923</b>	<b>41.8</b>	920	42.0	923	41.8	4	877	44.0	<b>878</b>	<b>43.9</b>	886	43.6
403.gcc	4	487	66.1	<b>487</b>	<b>66.1</b>	495	65.0	4	498	64.6	494	65.2	<b>496</b>	<b>64.9</b>
429.mcf	4	295	124	<b>295</b>	<b>123</b>	296	123	4	295	124	<b>295</b>	<b>123</b>	296	123
445.gobmk	4	<b>688</b>	<b>61.0</b>	690	60.8	685	61.3	4	661	63.4	<b>664</b>	<b>63.2</b>	667	62.9
456.hammer	4	392	95.3	396	94.3	<b>392</b>	<b>95.1</b>	4	321	116	320	117	<b>321</b>	<b>116</b>
458.sjeng	4	<b>791</b>	<b>61.2</b>	795	60.9	785	61.7	4	744	65.0	<b>748</b>	<b>64.7</b>	757	64.0
462.libquantum	4	166	500	166	499	<b>166</b>	<b>499</b>	4	166	500	166	499	<b>166</b>	<b>499</b>
464.h264ref	4	836	106	843	105	<b>836</b>	<b>106</b>	4	836	106	827	107	<b>830</b>	<b>107</b>
471.omnetpp	4	490	51.0	491	50.9	<b>490</b>	<b>51.0</b>	4	459	54.5	<b>463</b>	<b>54.0</b>	463	54.0
473.astar	4	<b>562</b>	<b>50.0</b>	561	50.0	563	49.9	4	<b>562</b>	<b>50.0</b>	561	50.0	563	49.9
483.xalancbmk	4	298	92.5	<b>301</b>	<b>91.7</b>	301	91.7	4	298	92.5	<b>301</b>	<b>91.7</b>	301	91.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind copies to the cores

## Platform Notes

BIOS Settings:  
C-State enabled in BIOS

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/SPECcpu12.1/smartheap:/root/SPECcpu12.1/ic12.1-libs/ia32:/root/SPECcpu12.1/ic12.1-libs/intel64"
```

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5 with binutils-2.17.50.0.6-14.el5
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 85.8

IBM System x3250 M4 (Intel Core i3-2100)

SPECint\_rate\_base2006 = 81.9

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2011

Hardware Availability: Oct-2011

Software Availability: Aug-2011

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 85.8

IBM System x3250 M4 (Intel Core i3-2100)

SPECint\_rate\_base2006 = 81.9

CPU2006 license: 11

Test date: Nov-2011

Test sponsor: IBM Corporation

Hardware Availability: Oct-2011

Tested by: IBM Corporation

Software Availability: Aug-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
 -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
 -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 85.8

IBM System x3250 M4 (Intel Core i3-2100)

SPECint\_rate\_base2006 = 81.9

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2011

Hardware Availability: Oct-2011

Software Availability: Aug-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revB.20111206.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:27:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 December 2011.