



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company


SPECint®\_rate2006 = 354

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

SPECint\_rate\_base2006 = 335

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Oct-2011  
Hardware Availability: Feb-2011  
Software Availability: Sep-2011

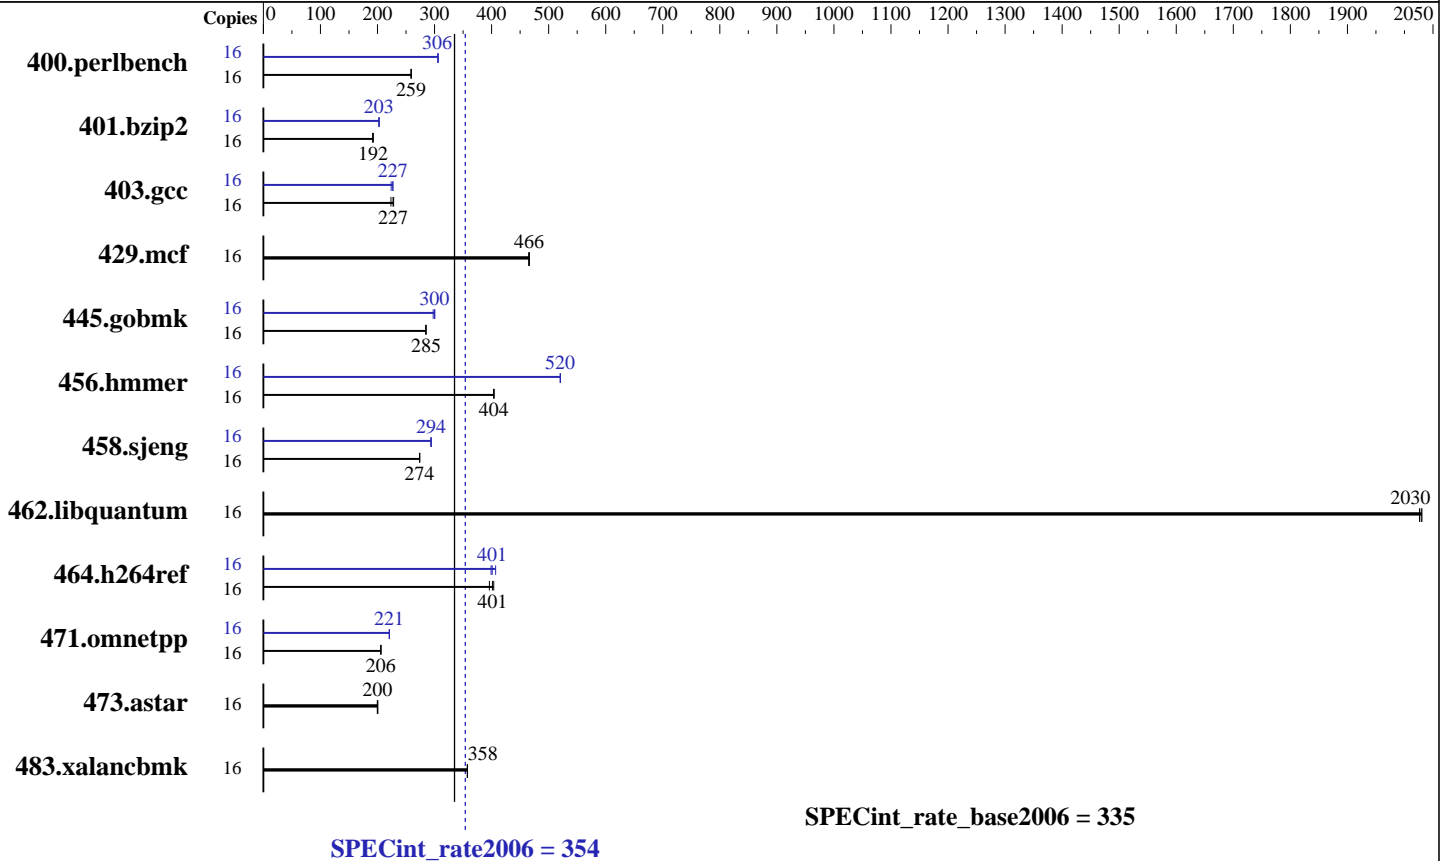

### Hardware

CPU Name: Intel Xeon X5687  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.86 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel Compiler XE Build 20110803  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

SPECint\_rate2006 = 354

SPECint\_rate\_base2006 = 335

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Oct-2011  
Hardware Availability: Feb-2011  
Software Availability: Sep-2011

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	603	259	604	259	<b>604</b>	<b>259</b>	16	<b>511</b>	<b>306</b>	511	306	510	306
401.bzip2	16	<b>803</b>	<b>192</b>	806	192	802	192	16	761	203	<b>762</b>	<b>203</b>	762	203
403.gcc	16	564	228	576	224	<b>567</b>	<b>227</b>	16	567	227	575	224	<b>568</b>	<b>227</b>
429.mcf	16	313	466	<b>313</b>	<b>466</b>	314	465	16	313	466	<b>313</b>	<b>466</b>	314	465
445.gobmk	16	589	285	<b>589</b>	<b>285</b>	590	284	16	<b>559</b>	<b>300</b>	564	298	559	300
456.hammer	16	<b>369</b>	<b>404</b>	370	404	369	404	16	<b>287</b>	<b>520</b>	287	520	287	520
458.sjeng	16	<b>707</b>	<b>274</b>	708	274	706	274	16	<b>658</b>	<b>294</b>	658	294	660	293
462.libquantum	16	164	2030	163	2030	<b>163</b>	<b>2030</b>	16	164	2030	163	2030	<b>163</b>	<b>2030</b>
464.h264ref	16	877	404	894	396	<b>882</b>	<b>401</b>	16	<b>883</b>	<b>401</b>	887	399	870	407
471.omnetpp	16	<b>485</b>	<b>206</b>	486	206	485	206	16	453	221	453	221	<b>453</b>	<b>221</b>
473.astar	16	560	200	563	200	<b>561</b>	<b>200</b>	16	560	200	563	200	<b>561</b>	<b>200</b>
483.xalancbmk	16	309	358	<b>309</b>	<b>358</b>	309	357	16	309	358	<b>309</b>	<b>358</b>	309	357

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Platform Notes

BIOS configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling  
Data Reuse set to Disabled

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/smartheap/cpu2006/ic12.1-libs/ia32/:/cpu2006/ic12.1-libs/intel64"



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 354**

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECint\_rate\_base2006 = 335**

**CPU2006 license:** 3

**Test date:** Oct-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2011

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 354**

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECint\_rate\_base2006 = 335**

**CPU2006 license:** 3

**Test date:** Oct-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/smartheap -lsmartheap

473.astar: basepeak = yes

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL380 G7  
(3.60 GHz, Intel Xeon X5687)

**SPECint\_rate2006 = 354**

**SPECint\_rate\_base2006 = 335**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2011  
**Hardware Availability:** Feb-2011  
**Software Availability:** Sep-2011

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20111122.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:03:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 December 2011.