



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 228

ProLiant DL380 G7
(3.60 GHz, Intel Xeon X5687)

SPECfp_rate_base2006 = 223

CPU2006 license: 3


Test date: Oct-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Sep-2011

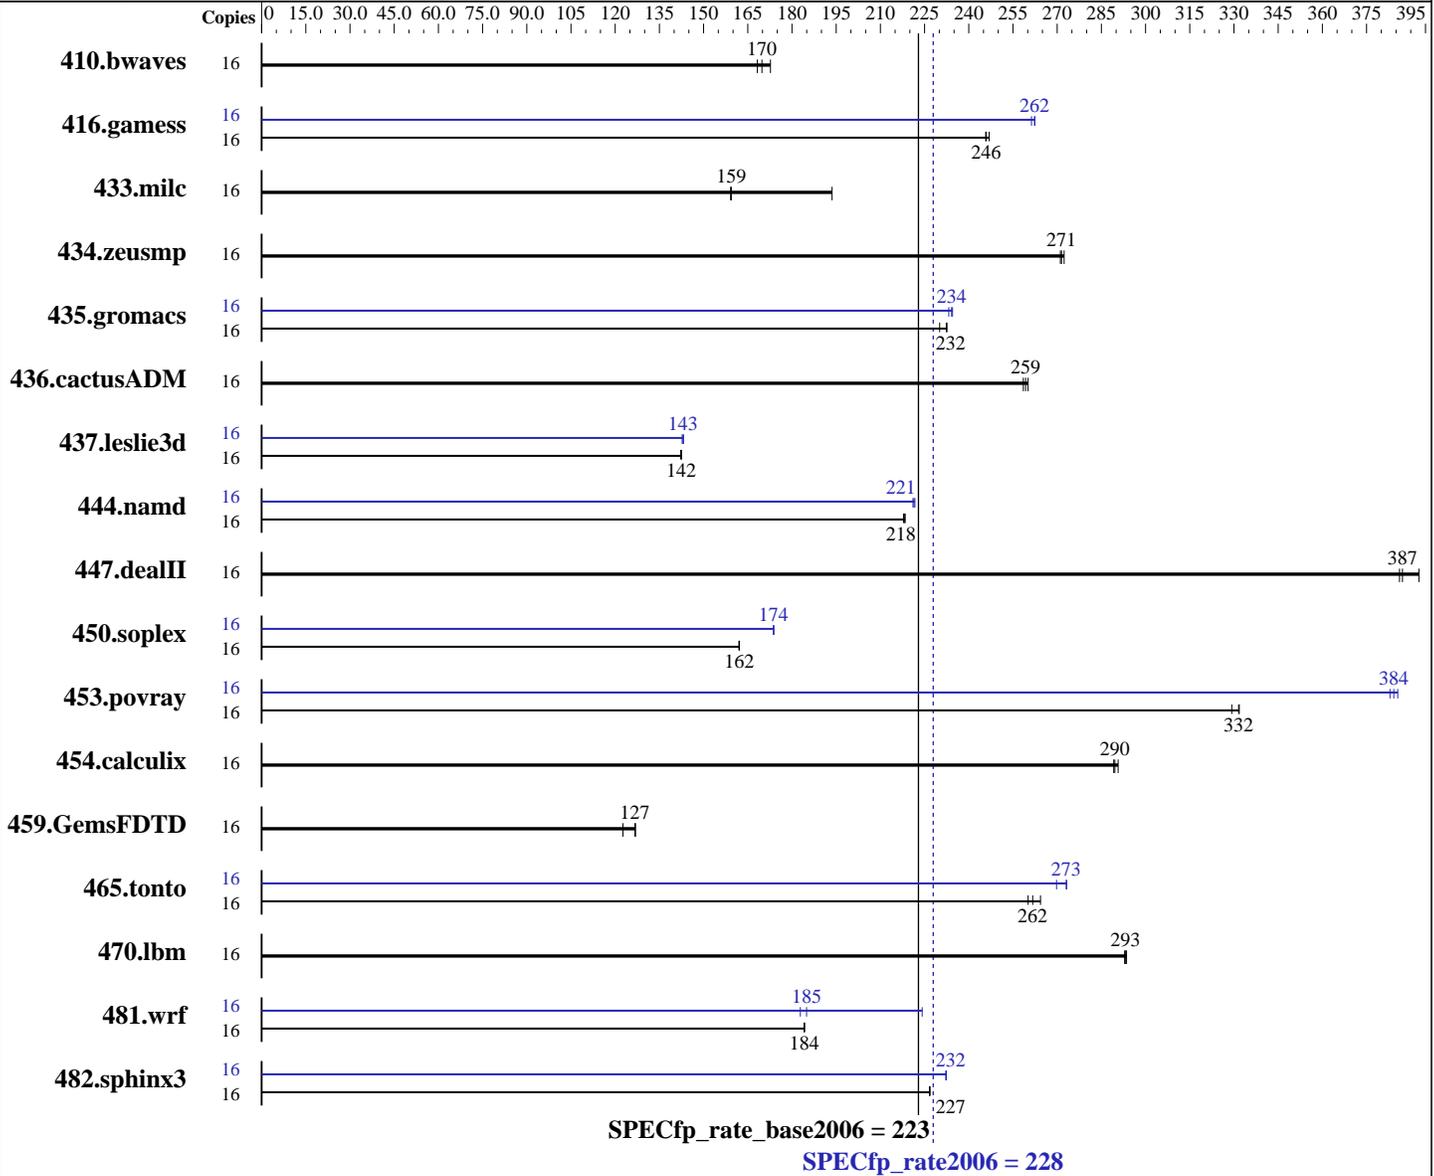

Hardware

CPU Name: Intel Xeon X5687
 CPU Characteristics: Intel Turbo Boost Technology up to 3.86 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
 Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 12.1.0.225 of
 Intel Compiler XE
 Build 20110803
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = **228**

ProLiant DL380 G7
(3.60 GHz, Intel Xeon X5687)

SPECfp_rate_base2006 = **223**

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Feb-2011
Software Availability: Sep-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 146 GB 15 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1292	168	1259	173	<u>1281</u>	<u>170</u>	16	1292	168	1259	173	<u>1281</u>	<u>170</u>
416.gamess	16	1269	247	<u>1274</u>	<u>246</u>	1275	246	16	<u>1194</u>	<u>262</u>	1194	262	1199	261
433.milc	16	759	194	<u>921</u>	<u>159</u>	923	159	16	759	194	<u>921</u>	<u>159</u>	923	159
434.zeusmp	16	<u>536</u>	<u>271</u>	537	271	535	272	16	<u>536</u>	<u>271</u>	537	271	535	272
435.gromacs	16	491	233	496	230	<u>492</u>	<u>232</u>	16	490	233	<u>488</u>	<u>234</u>	487	234
436.cactusADM	16	740	259	735	260	<u>737</u>	<u>259</u>	16	740	259	735	260	<u>737</u>	<u>259</u>
437.leslie3d	16	1057	142	1055	143	<u>1056</u>	<u>142</u>	16	1054	143	1050	143	<u>1052</u>	<u>143</u>
444.namd	16	588	218	589	218	<u>588</u>	<u>218</u>	16	<u>580</u>	<u>221</u>	580	221	579	222
447.dealII	16	<u>473</u>	<u>387</u>	466	393	474	386	16	<u>473</u>	<u>387</u>	466	393	474	386
450.soplex	16	823	162	<u>823</u>	<u>162</u>	824	162	16	768	174	<u>768</u>	<u>174</u>	768	174
453.povray	16	<u>257</u>	<u>332</u>	259	329	257	332	16	<u>222</u>	<u>384</u>	221	386	222	383
454.calculix	16	454	291	456	289	<u>456</u>	<u>290</u>	16	454	291	456	289	<u>456</u>	<u>290</u>
459.GemsFDTD	16	1384	123	<u>1340</u>	<u>127</u>	1338	127	16	1384	123	<u>1340</u>	<u>127</u>	1338	127
465.tonto	16	<u>602</u>	<u>262</u>	596	264	605	260	16	584	270	<u>577</u>	<u>273</u>	576	273
470.lbm	16	749	294	<u>750</u>	<u>293</u>	751	293	16	749	294	<u>750</u>	<u>293</u>	751	293
481.wrf	16	971	184	<u>970</u>	<u>184</u>	970	184	16	797	224	<u>966</u>	<u>185</u>	978	183
482.sphinx3	16	<u>1376</u>	<u>227</u>	1375	227	1376	227	16	1342	232	1343	232	<u>1342</u>	<u>232</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 228

ProLiant DL380 G7
(3.60 GHz, Intel Xeon X5687)

SPECfp_rate_base2006 = 223

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Feb-2011
Software Availability: Sep-2011

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling
Data Reuse set to Disabled

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/smartheap:/cpu2006/ic12.1-libs/ia32:/cpu2006/ic12.1-libs/intel64"

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G7
(3.60 GHz, Intel Xeon X5687)

SPECfp_rate2006 = 228

SPECfp_rate_base2006 = 223

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2011

Hardware Availability: Feb-2011

Software Availability: Sep-2011

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.deallI: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 228

ProLiant DL380 G7
(3.60 GHz, Intel Xeon X5687)

SPECfp_rate_base2006 = 223

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Feb-2011
Software Availability: Sep-2011

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32
447.dealIII: basepeak = yes
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static
434.zeusmp: basepeak = yes
437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 228

ProLiant DL380 G7
(3.60 GHz, Intel Xeon X5687)

SPECfp_rate_base2006 = 223

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2011
Hardware Availability: Feb-2011
Software Availability: Sep-2011

Peak Optimization Flags (Continued)

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20111122.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20111122.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:04:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 December 2011.