



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R515  
(AMD Opteron 4226, 2.70 GHz)

SPECint®\_rate2006 = 208

SPECint\_rate\_base2006 = 185

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2011

Hardware Availability: Jan-2012

Software Availability: Jul-2011

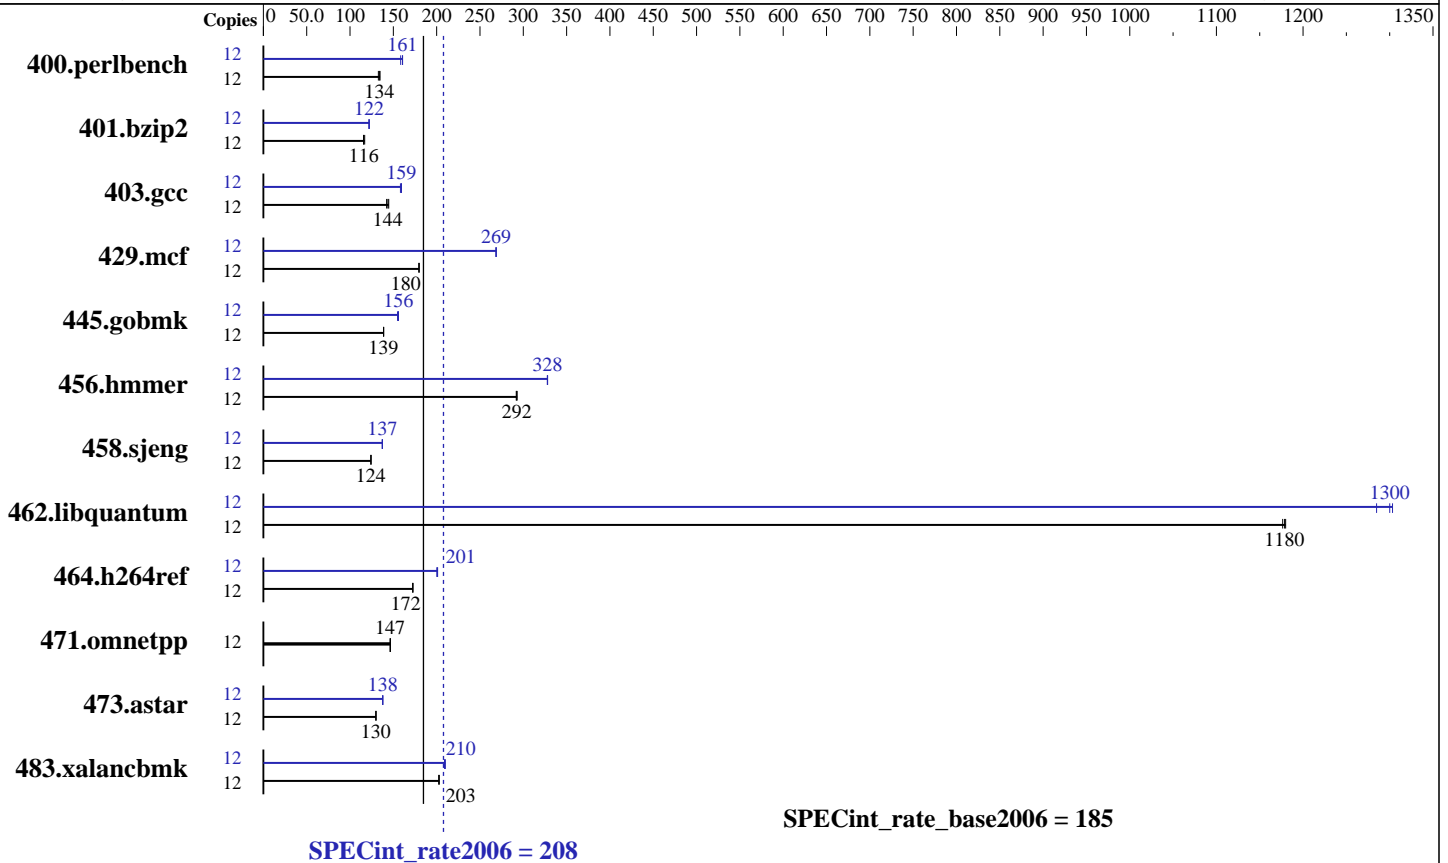

### Hardware

CPU Name: AMD Opteron 4226  
 CPU Characteristics: AMD Turbo CORE technology up to 3.10 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 192 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1,  
 Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R515  
(AMD Opteron 4226, 2.70 GHz)

SPECint\_rate2006 = 208

SPECint\_rate\_base2006 = 185

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Dec-2011  
Hardware Availability: Jan-2012  
Software Availability: Jul-2011

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	12	871	135	883	133	<b>875</b>	<b>134</b>	12	740	158	<b>730</b>	<b>161</b>	730	161		
401.bzip2	12	<b>1000</b>	<b>116</b>	990	117	1002	116	12	<b>948</b>	<b>122</b>	948	122	951	122		
403.gcc	12	668	145	<b>672</b>	<b>144</b>	679	142	12	611	158	606	159	<b>606</b>	<b>159</b>		
429.mcf	12	609	180	609	180	<b>609</b>	<b>180</b>	12	408	268	<b>408</b>	<b>269</b>	407	269		
445.gobmk	12	907	139	907	139	<b>907</b>	<b>139</b>	12	<b>808</b>	<b>156</b>	808	156	813	155		
456.hammer	12	384	292	<b>383</b>	<b>292</b>	382	293	12	<b>341</b>	<b>328</b>	341	328	342	328		
458.sjeng	12	1169	124	<b>1169</b>	<b>124</b>	1169	124	12	<b>1057</b>	<b>137</b>	1058	137	1057	137		
462.libquantum	12	<b>211</b>	<b>1180</b>	211	1180	211	1180	12	194	1280	191	1300	<b>191</b>	<b>1300</b>		
464.h264ref	12	<b>1540</b>	<b>172</b>	1540	172	1539	173	12	1326	200	<b>1323</b>	<b>201</b>	1321	201		
471.omnetpp	12	512	146	<b>512</b>	<b>147</b>	512	147	12	512	146	<b>512</b>	<b>147</b>	512	147		
473.astar	12	648	130	<b>648</b>	<b>130</b>	648	130	12	612	138	<b>611</b>	<b>138</b>	611	138		
483.xalancbmk	12	409	202	<b>408</b>	<b>203</b>	408	203	12	<b>395</b>	<b>210</b>	395	210	396	209		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
Large pages were not enabled for this run  
Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1  
Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
opencc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R515  
(AMD Opteron 4226, 2.70 GHz)

**SPECint\_rate2006 = 208**

**SPECint\_rate\_base2006 = 185**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Dec-2011  
**Hardware Availability:** Jan-2012  
**Software Availability:** Jul-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=on  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 208**

PowerEdge R515  
(AMD Opteron 4226, 2.70 GHz)

**SPECint\_rate\_base2006 = 185**

**CPU2006 license:** 55

**Test date:** Dec-2011

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jan-2012

**Tested by:** Dell Inc.

**Software Availability:** Jul-2011

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
-IPA:plimit=20000 -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
-CG:unroll\_fb\_req=on -CG:movext\_icmp=off -HP:bd=2m:heap=2m

401.bzp2: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
-OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
-HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
-CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
-HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
-INLINE:aggressive=on -CG:gcm=off  
-GRA:prioritize\_by\_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
-IPA:min\_hotness=300 -IPA:pu\_reorder=1  
-LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
-OPT:alias=disjoint -OPT:unroll\_times\_max=16  
-OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
-HP:bd=2m:heap=2m

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:bd=2m:heap=2m  
-WOPT:sib=on

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R515  
(AMD Opteron 4226, 2.70 GHz)

**SPECint\_rate2006 = 208**

**SPECint\_rate\_base2006 = 185**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Dec-2011  
**Hardware Availability:** Jan-2012  
**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=16 -LNO:prefetch=2  
-LNO:prefetch\_ahead=4 -LNO:pf2=0 -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-GRA:optimize\_boundary=on -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:small\_pu=3000 -IPA:plimit=3000  
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>  
<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>  
<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R515  
(AMD Opteron 4226, 2.70 GHz)

**SPECint\_rate2006 = 208**

**SPECint\_rate\_base2006 = 185**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Dec-2011

**Hardware Availability:** Jan-2012

**Software Availability:** Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 02:13:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 January 2012.