



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX (AMD Opteron 6282 SE, 2.60 GHz)  
AMD Opteron 6282 SE

**SPECfp®\_rate2006 = 402**

**SPECfp\_rate\_base2006 = 370**

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

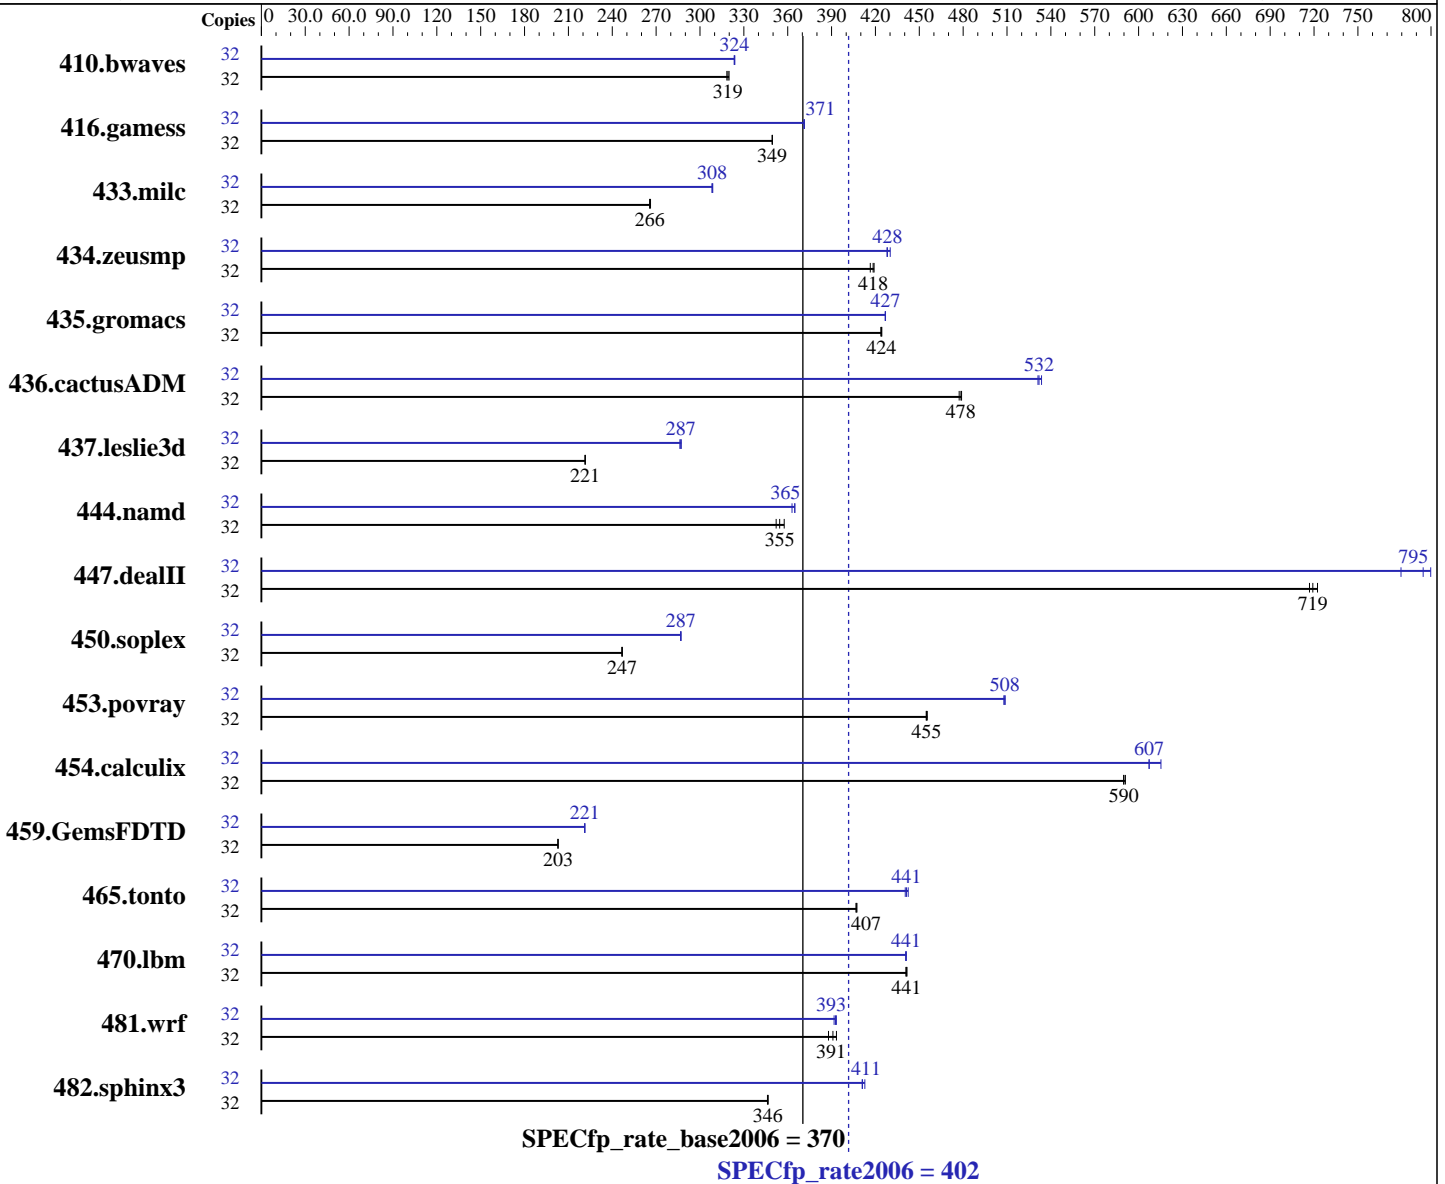

### Hardware

CPU Name: AMD Opteron 6282 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) sp1, Kernel 2.6.32.46-0.3-default  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: NFSv3 IPoIB  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX (AMD Opteron 6282 SE, 2.60 GHz)  
AMD Opteron 6282 SE

SPECfp\_rate2006 = 402

SPECfp\_rate\_base2006 = 370

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 16 TB RAID 5  
32 x 500 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1366	318	<u>1363</u>	<u>319</u>	1359	320	32	<u>1344</u>	<u>324</u>	1343	324	1345	323
416.gamess	32	1793	350	<u>1793</u>	<u>349</u>	1793	349	32	1688	371	1687	371	<u>1688</u>	<u>371</u>
433.milc	32	<u>1106</u>	<u>266</u>	1106	266	1104	266	32	951	309	<u>952</u>	<u>308</u>	953	308
434.zeusmp	32	695	419	699	416	<u>696</u>	<u>418</u>	32	<u>680</u>	<u>428</u>	677	430	680	428
435.gromacs	32	538	424	539	424	<u>539</u>	<u>424</u>	32	536	427	535	427	<u>535</u>	<u>427</u>
436.cactusADM	32	798	479	<u>799</u>	<u>478</u>	801	477	32	720	531	<u>719</u>	<u>532</u>	717	534
437.leslie3d	32	1358	222	<u>1358</u>	<u>221</u>	1359	221	32	1051	286	1047	287	<u>1049</u>	<u>287</u>
444.namd	32	729	352	718	358	<u>724</u>	<u>355</u>	32	707	363	703	365	<u>704</u>	<u>365</u>
447.dealII	32	511	717	<u>509</u>	<u>719</u>	507	722	32	470	779	<u>461</u>	<u>795</u>	458	800
450.soplex	32	1083	247	<u>1081</u>	<u>247</u>	1081	247	32	<u>930</u>	<u>287</u>	930	287	931	287
453.povray	32	374	455	<u>374</u>	<u>455</u>	374	455	32	335	508	335	509	<u>335</u>	<u>508</u>
454.calculix	32	<u>447</u>	<u>590</u>	448	590	447	591	32	<u>435</u>	<u>607</u>	435	607	429	615
459.GemsFDTD	32	1673	203	<u>1673</u>	<u>203</u>	1674	203	32	<u>1535</u>	<u>221</u>	1535	221	1535	221
465.tonto	32	<u>774</u>	<u>407</u>	773	407	774	407	32	<u>714</u>	<u>441</u>	715	440	712	442
470.lbm	32	996	442	<u>997</u>	<u>441</u>	997	441	32	997	441	<u>997</u>	<u>441</u>	998	441
481.wrf	32	909	393	<u>914</u>	<u>391</u>	921	388	32	912	392	909	393	<u>910</u>	<u>393</u>
482.sphinx3	32	1802	346	<u>1800</u>	<u>346</u>	1800	347	32	1518	411	<u>1517</u>	<u>411</u>	1511	413

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
Set vm/nr\_hugepages=28672 in /etc/sysctl.conf

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX (AMD Opteron 6282 SE, 2.60 GHz)  
AMD Opteron 6282 SE

SPECfp\_rate2006 = 402

SPECfp\_rate\_base2006 = 370

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

## Operating System Notes (Continued)

```
mount -t hugetlbfs nodev /tmp/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/store/cma/cpu2006-v1.2/amd1104-rate-libs-revB/32:/store/cma/cpu2006-v1.2/amd1104-rate-libs-revB/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX (AMD Opteron 6282 SE, 2.60 GHz)  
AMD Opteron 6282 SE

SPECfp\_rate2006 = 402

SPECfp\_rate\_base2006 = 370

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX (AMD Opteron 6282 SE, 2.60 GHz)  
AMD Opteron 6282 SE

SPECfp\_rate2006 = 402

SPECfp\_rate\_base2006 = 370

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

## Peak Portability Flags (Continued)

437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
 -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs\_best=on  
 -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee\_limit=1200  
 -OPT:struct\_array\_copy=2 -OPT:alias=field\_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp\_peep=on  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=8000 -IPA:small\_pu=100 -mso

482.sphinx3: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
 -CG:cmp\_peep=on -CG:local\_sched\_alg=2 -INLINE:aggressive=on  
 -LNO:prefetch=2 -LNO:prefetch\_ahead=4 -mso

### C++ benchmarks:

444.namd: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
 -CG:local\_sched\_alg=2 -CG:load\_exe=0 -OPT:unroll\_size=256  
 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=bdver1 -Ofast -D\_\_OPEN64\_FAST\_SET -static  
 -INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0  
 -fno-emit-exceptions -m32 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
 -GRA:unspill=on -CG:cmp\_peep=on -CG:movext\_icmp=off  
 -TENV:frame\_pointer=off

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -fno-exceptions -m32  
 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX (AMD Opteron 6282 SE, 2.60 GHz)  
AMD Opteron 6282 SE

SPECfp\_rate2006 = 402

SPECfp\_rate\_base2006 = 370

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

## Peak Optimization Flags (Continued)

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
-LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
-WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off  
-HP:bd=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
-LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2  
-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-HP:bd=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bd=2m:heap=2m

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
-WOPT:sib=on

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -HP:bd=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-CG:load\_exe=1 -HP -WOPT:sib=on



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX (AMD Opteron 6282 SE, 2.60 GHz)  
AMD Opteron 6282 SE

**SPECfp\_rate2006 = 402**

**SPECfp\_rate\_base2006 = 370**

**CPU2006 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Dec-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 02:15:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 March 2012.