



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint®_rate2006 = 340

Cisco UCS C210 M2 (Intel Xeon E5649, 2.53 GHz)

SPECint_rate_base2006 = 327

CPU2006 license: 9019


Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

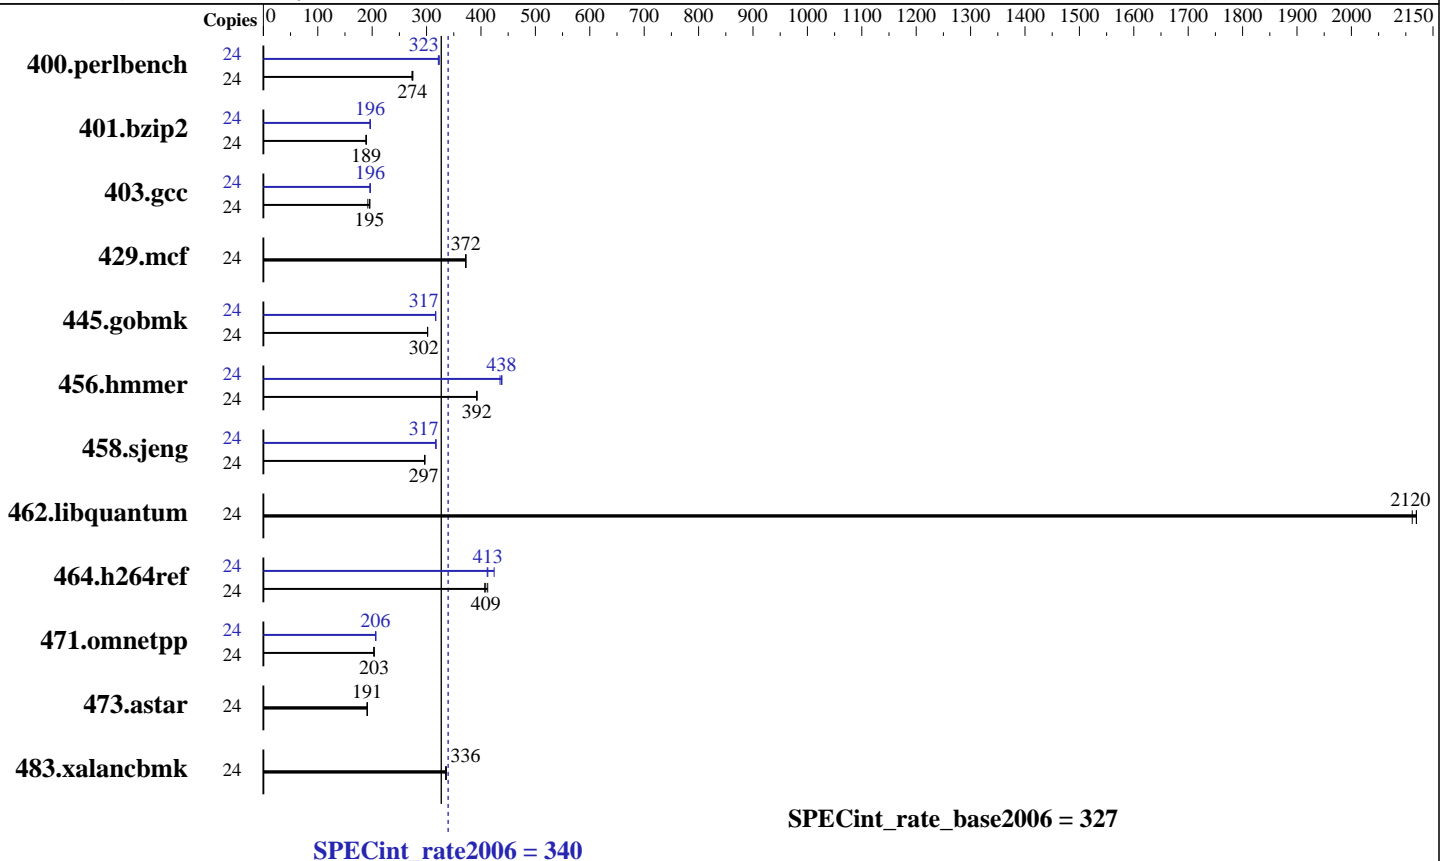

Hardware

CPU Name: Intel Xeon E5649
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-10600R-9, ECC)
 Disk Subsystem: 600 GB SAS 10K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 340

Cisco UCS C210 M2 (Intel Xeon E5649, 2.53 GHz)

SPECint_rate_base2006 = 327

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	858	273	853	275	856	274	24	726	323	729	322	726	323
401.bzip2	24	1224	189	1224	189	1229	189	24	1181	196	1179	196	1178	197
403.gcc	24	989	195	987	196	1006	192	24	984	196	982	197	986	196
429.mcf	24	588	372	588	372	589	372	24	588	372	588	372	589	372
445.gobmk	24	834	302	834	302	834	302	24	795	317	795	316	795	317
456.hammer	24	570	393	571	392	571	392	24	515	435	511	438	511	438
458.sjeng	24	978	297	979	297	980	296	24	917	317	916	317	915	317
462.libquantum	24	235	2110	235	2120	235	2120	24	235	2110	235	2120	235	2120
464.h264ref	24	1288	412	1299	409	1306	407	24	1287	413	1291	411	1252	424
471.omnetpp	24	739	203	738	203	736	204	24	725	207	727	206	728	206
473.astar	24	882	191	884	191	881	191	24	882	191	884	191	881	191
483.xalancbmk	24	494	336	494	335	492	336	24	494	336	494	335	492	336

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration : Data Reuse Optimization = Disabled
Sysinfo program /opt/cpu2006/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Fri Jan 27 12:12:22 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5649 @ 2.53GHz
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 6

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 340

Cisco UCS C210 M2 (Intel Xeon E5649, 2.53 GHz)

SPECint_rate_base2006 = 327

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jan-2012

Hardware Availability: Mar-2011

Software Availability: Dec-2011

Platform Notes (Continued)

```

siblings : 12
physical 0: cores 0 1 2 8 9 10
physical 1: cores 0 1 2 8 9 10
cache size : 12288 KB

```

From /proc/meminfo

```

MemTotal:          98997780 kB
HugePages_Total:   0
Hugepagesize:      2048 kB

```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 27 12:09

SPEC is set to: /opt/cpu2006

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      67G   5.5G  58G   9% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006/libs/32:/opt/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 340

Cisco UCS C210 M2 (Intel Xeon E5649, 2.53 GHz)

SPECint_rate_base2006 = 327

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jan-2012

Hardware Availability: Mar-2011

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 340

Cisco UCS C210 M2 (Intel Xeon E5649, 2.53 GHz)

SPECint_rate_base2006 = 327

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 340

Cisco UCS C210 M2 (Intel Xeon E5649, 2.53 GHz)

SPECint_rate_base2006 = 327

CPU2006 license: 9019

Test date: Jan-2012

Test sponsor: Cisco Systems

Hardware Availability: Mar-2011

Tested by: Cisco Systems

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:40:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 February 2012.