



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp®_rate2006 = 107

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220)

SPECfp_rate_base2006 = 105

CPU2006 license: 9008


Test date: Feb-2012

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2011

Tested by: ACTION S.A.

Software Availability: Oct-2011

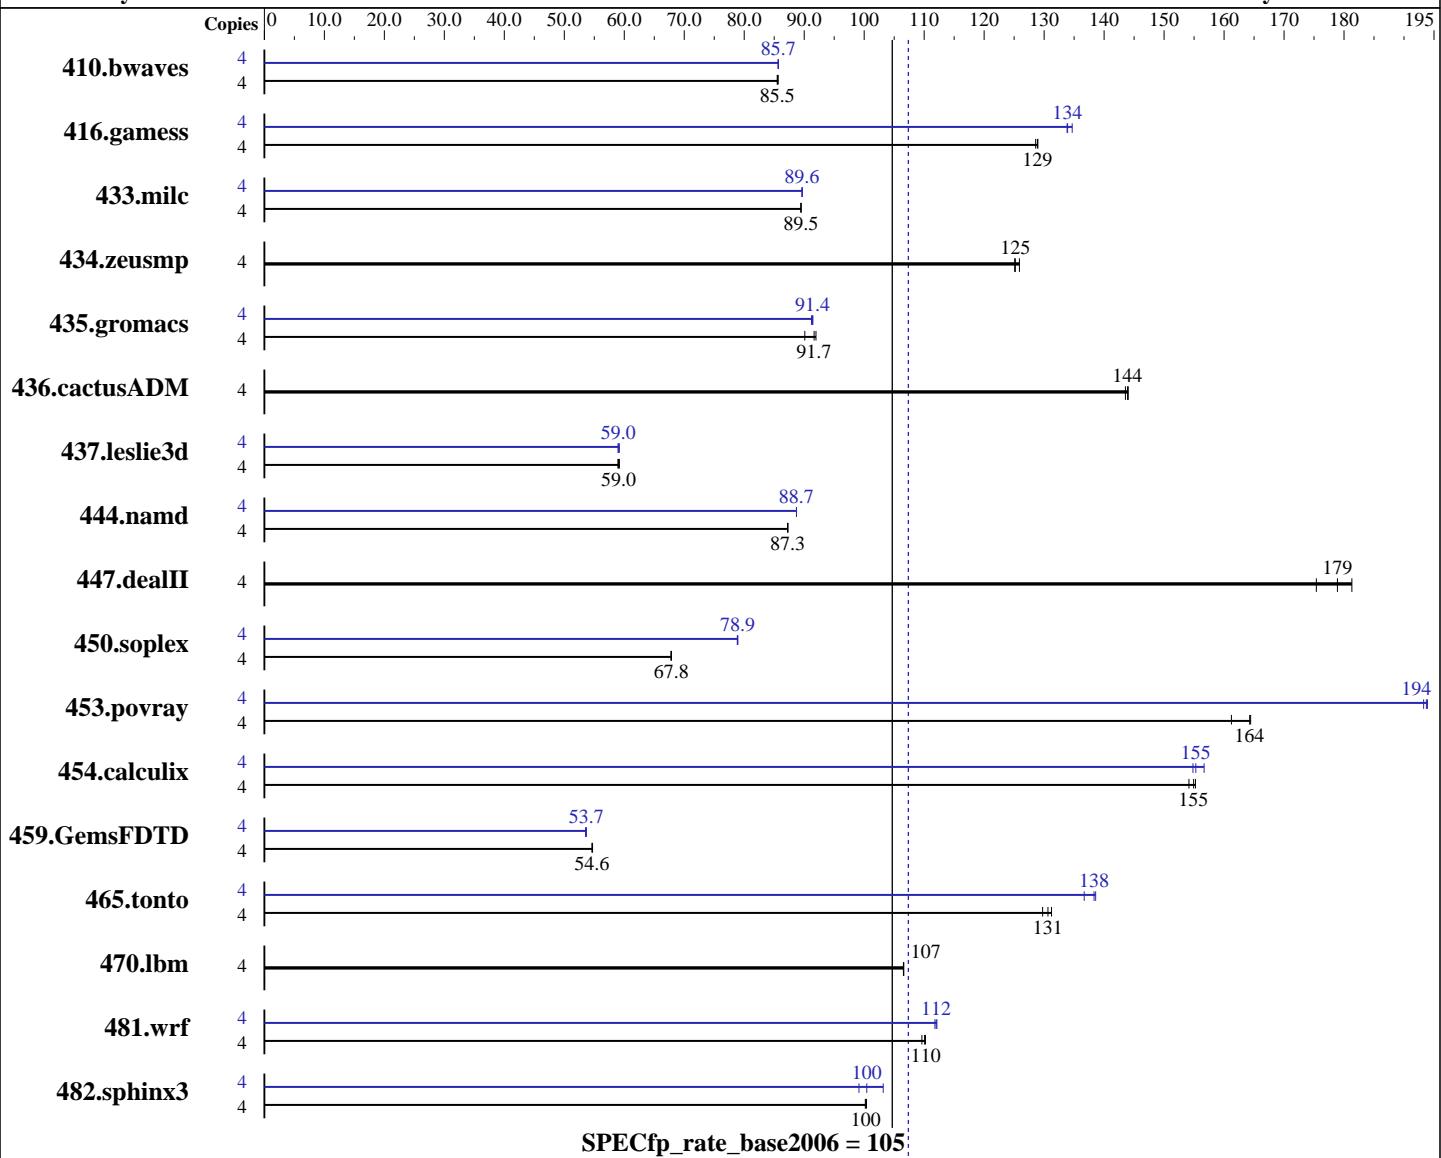

Hardware

CPU Name: Intel Xeon E3-1220
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP2, Kernel 3.0.13-0.9-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 = 107
ACTINA SOLAR 110 S5 (Intel Xeon E3-1220)	SPECfp_rate_base2006 = 105
CPU2006 license: 9008	Test date: Feb-2012
Test sponsor: ACTION S.A.	Hardware Availability: Apr-2011
Tested by: ACTION S.A.	Software Availability: Oct-2011
L3 Cache: 8 MB I+D on chip per chip Other Cache: None Memory: 16 GB (4 x 4 GB 2Rx8 PC3-10600E-9, ECC) Disk Subsystem: 1 TB SATA II, 7200 RPM Other Hardware: None	Base Pointers: 32/64-bit Peak Pointers: 32/64-bit Other Software: Microquill SmartHeap V9.01

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	635	85.7	636	85.5	636	85.5	4	634	85.7	635	85.7	634	85.7
416.gamess	4	608	129	607	129	609	129	4	585	134	585	134	582	135
433.milc	4	410	89.5	410	89.5	410	89.5	4	410	89.6	409	89.7	410	89.6
434.zeusmp	4	289	126	291	125	291	125	4	289	126	291	125	291	125
435.gromacs	4	311	92.0	312	91.7	317	90.1	4	312	91.4	312	91.4	313	91.2
436.cactusADM	4	332	144	332	144	333	144	4	332	144	332	144	333	144
437.leslie3d	4	638	58.9	635	59.2	637	59.0	4	635	59.2	637	59.0	637	59.0
444.namd	4	368	87.2	368	87.3	368	87.3	4	362	88.7	362	88.7	362	88.7
447.dealII	4	252	181	256	179	261	175	4	252	181	256	179	261	175
450.soplex	4	492	67.8	492	67.8	492	67.8	4	423	78.9	423	78.9	423	78.8
453.povray	4	130	164	132	161	129	164	4	110	194	110	194	110	193
454.calculix	4	213	155	214	154	213	155	4	211	157	213	155	213	155
459.GemsFDTD	4	777	54.6	776	54.7	777	54.6	4	793	53.5	791	53.7	791	53.7
465.tonto	4	301	131	300	131	303	130	4	285	138	284	139	288	137
470.lbm	4	516	107	516	107	516	107	4	516	107	516	107	516	107
481.wrf	4	406	110	408	110	405	110	4	399	112	400	112	398	112
482.sphinx3	4	777	100	777	100	778	100	4	756	103	776	100	786	99.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/lib32:/cpu2006.1.2/lib64"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 107

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220)

SPECfp_rate_base2006 = 105

CPU2006 license: 9008

Test date: Feb-2012

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2011

Tested by: ACTION S.A.

Software Availability: Oct-2011

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

 -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 = 107
ACTINA SOLAR 110 S5 (Intel Xeon E3-1220)	SPECfp_rate_base2006 = 105
CPU2006 license: 9008	Test date: Feb-2012
Test sponsor: ACTION S.A.	Hardware Availability: Apr-2011
Tested by: ACTION S.A.	Software Availability: Oct-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 = 107
ACTINA SOLAR 110 S5 (Intel Xeon E3-1220)	SPECfp_rate_base2006 = 105
CPU2006 license: 9008	Test date: Feb-2012
Test sponsor: ACTION S.A.	Hardware Availability: Apr-2011
Tested by: ACTION S.A.	Software Availability: Oct-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 107

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220)

SPECfp_rate_base2006 = 105

CPU2006 license: 9008

Test date: Feb-2012

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2011

Tested by: ACTION S.A.

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 02:14:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 February 2012.