



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = 484

PRIMERGY TX300 S7, Intel Xeon E5-2670, 2.60 GHz

SPECfp\_rate\_base2006 = 470

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

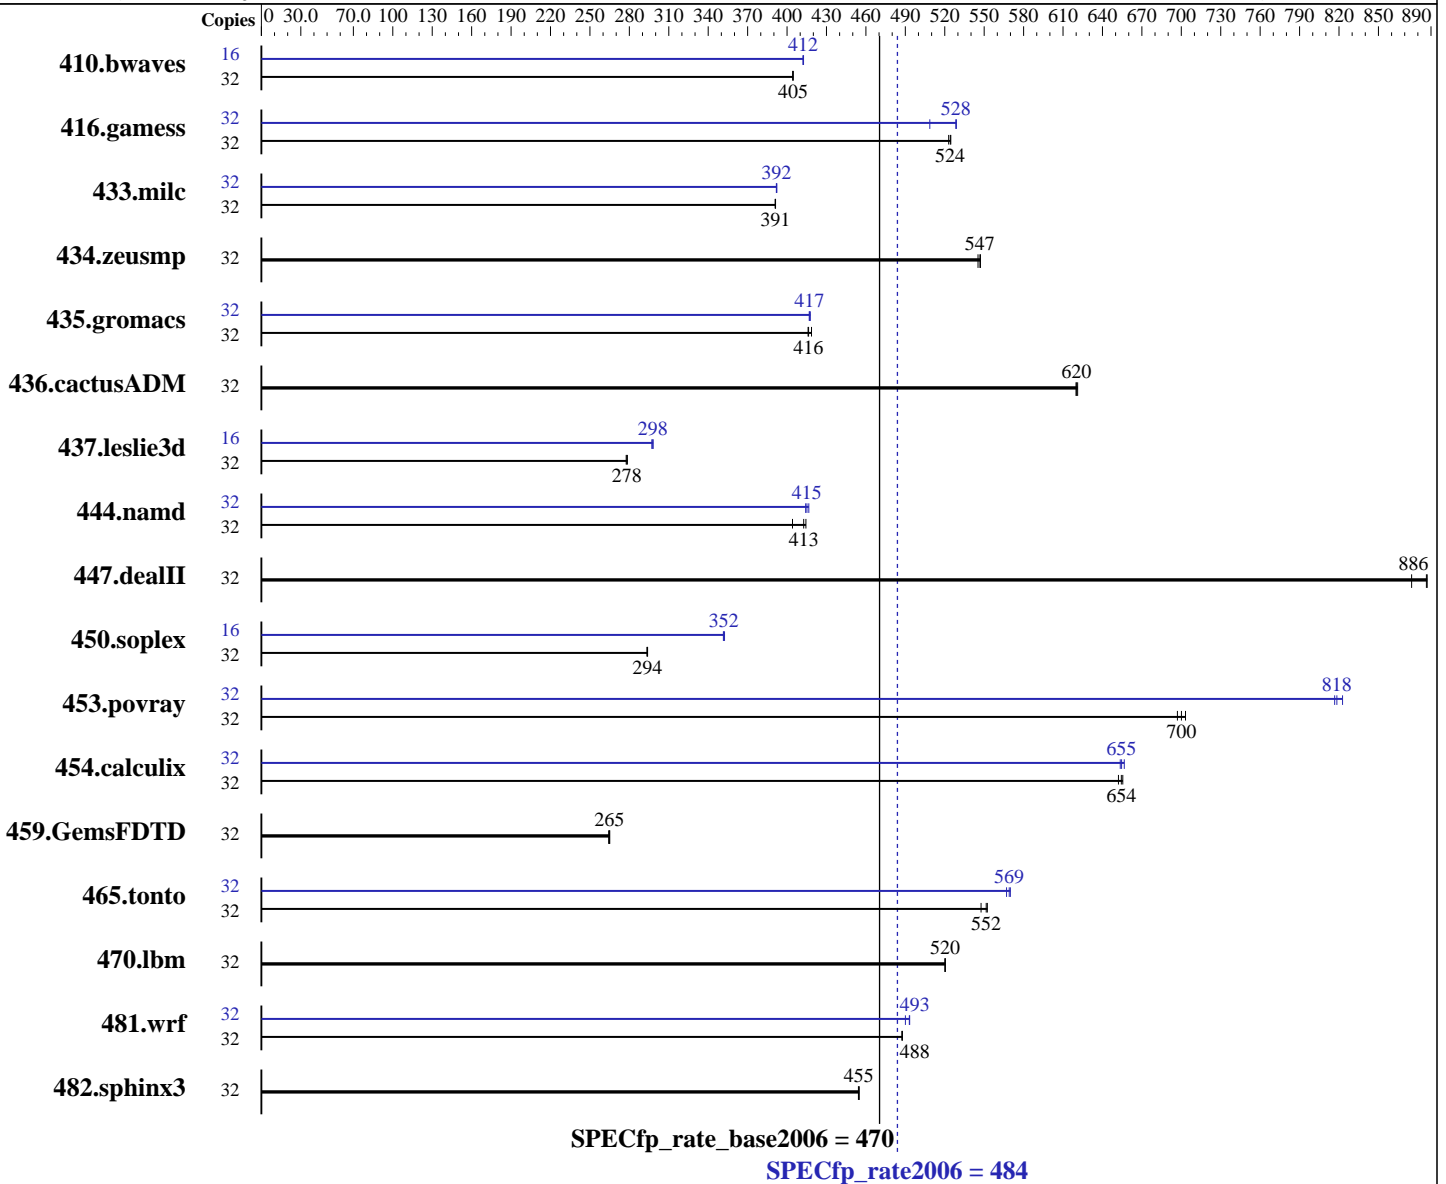

### Hardware

CPU Name: Intel Xeon E5-2670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 484

PRIMERGY TX300 S7, Intel Xeon E5-2670, 2.60 GHz

SPECfp\_rate\_base2006 = 470

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1075	405	1076	404	<b>1075</b>	<b>405</b>	16	<b>527</b>	<b>412</b>	528	412	527	413
416.gamess	32	1198	523	<b>1195</b>	<b>524</b>	1194	525	32	1185	529	1232	509	<b>1186</b>	<b>528</b>
433.milc	32	751	391	<b>751</b>	<b>391</b>	751	391	32	<b>749</b>	<b>392</b>	749	392	750	392
434.zeusmp	32	534	545	532	547	<b>533</b>	<b>547</b>	32	534	545	532	547	<b>533</b>	<b>547</b>
435.gromacs	32	546	419	549	416	<b>549</b>	<b>416</b>	32	<b>548</b>	<b>417</b>	547	418	548	417
436.cactusADM	32	616	621	617	620	<b>616</b>	<b>620</b>	32	616	621	617	620	<b>616</b>	<b>620</b>
437.leslie3d	32	1084	278	<b>1082</b>	<b>278</b>	1080	279	16	506	297	<b>505</b>	<b>298</b>	505	298
444.namd	32	<b>622</b>	<b>413</b>	619	414	635	404	32	620	414	616	417	<b>618</b>	<b>415</b>
447.dealII	32	413	887	418	875	<b>413</b>	<b>886</b>	32	413	887	418	875	<b>413</b>	<b>886</b>
450.soplex	32	908	294	<b>909</b>	<b>294</b>	910	293	16	379	352	380	352	<b>379</b>	<b>352</b>
453.povray	32	244	697	242	703	<b>243</b>	<b>700</b>	32	<b>208</b>	<b>818</b>	207	823	208	817
454.calculix	32	403	655	405	652	<b>403</b>	<b>654</b>	32	<b>403</b>	<b>655</b>	404	654	402	657
459.GemsFDTD	32	1285	264	1281	265	<b>1281</b>	<b>265</b>	32	1285	264	1281	265	<b>1281</b>	<b>265</b>
465.tonto	32	<b>571</b>	<b>552</b>	575	548	570	552	32	552	570	<b>553</b>	<b>569</b>	555	567
470.lbm	32	845	520	<b>845</b>	<b>520</b>	845	520	32	845	520	<b>845</b>	<b>520</b>	845	520
481.wrf	32	<b>733</b>	<b>488</b>	733	488	733	487	32	729	490	725	493	<b>725</b>	<b>493</b>
482.sphinx3	32	<b>1372</b>	<b>455</b>	1371	455	1373	454	32	<b>1372</b>	<b>455</b>	1371	455	1373	454

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 484

PRIMERGY TX300 S7, Intel Xeon E5-2670, 2.60 GHz

SPECfp\_rate\_base2006 = 470

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>  
 This result was measured on the PRIMERGY RX350 S7. The PRIMERGY RX350 S7 and the PRIMERGY TX300 S7 are electronically equivalent.  
 For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 484**

PRIMERGY TX300 S7, Intel Xeon E5-2670, 2.60 GHz

**SPECfp\_rate\_base2006 = 470**

**CPU2006 license:** 19

**Test date:** Jan-2012

**Test sponsor:** Fujitsu

**Hardware Availability:** Mar-2012

**Tested by:** Fujitsu

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex: icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
447.dealII: `-DSPEC_CPU_LP64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 484**

PRIMERGY TX300 S7, Intel Xeon E5-2670, 2.60 GHz

**SPECfp\_rate\_base2006 = 470**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jan-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
 -inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 484**

PRIMERGY TX300 S7, Intel Xeon E5-2670, 2.60 GHz

**SPECfp\_rate\_base2006 = 470**

**CPU2006 license:** 19

**Test date:** Jan-2012

**Test sponsor:** Fujitsu

**Hardware Availability:** Mar-2012

**Tested by:** Fujitsu

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 06:41:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 April 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>