



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®\_rate2006 = 399

Servidor Itautec MX224 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 382

CPU2006 license: 9001


Test date: Mar-2012

Test sponsor: Itautec

Hardware Availability: Jul-2011

Tested by: Itautec

Software Availability: Dec-2011

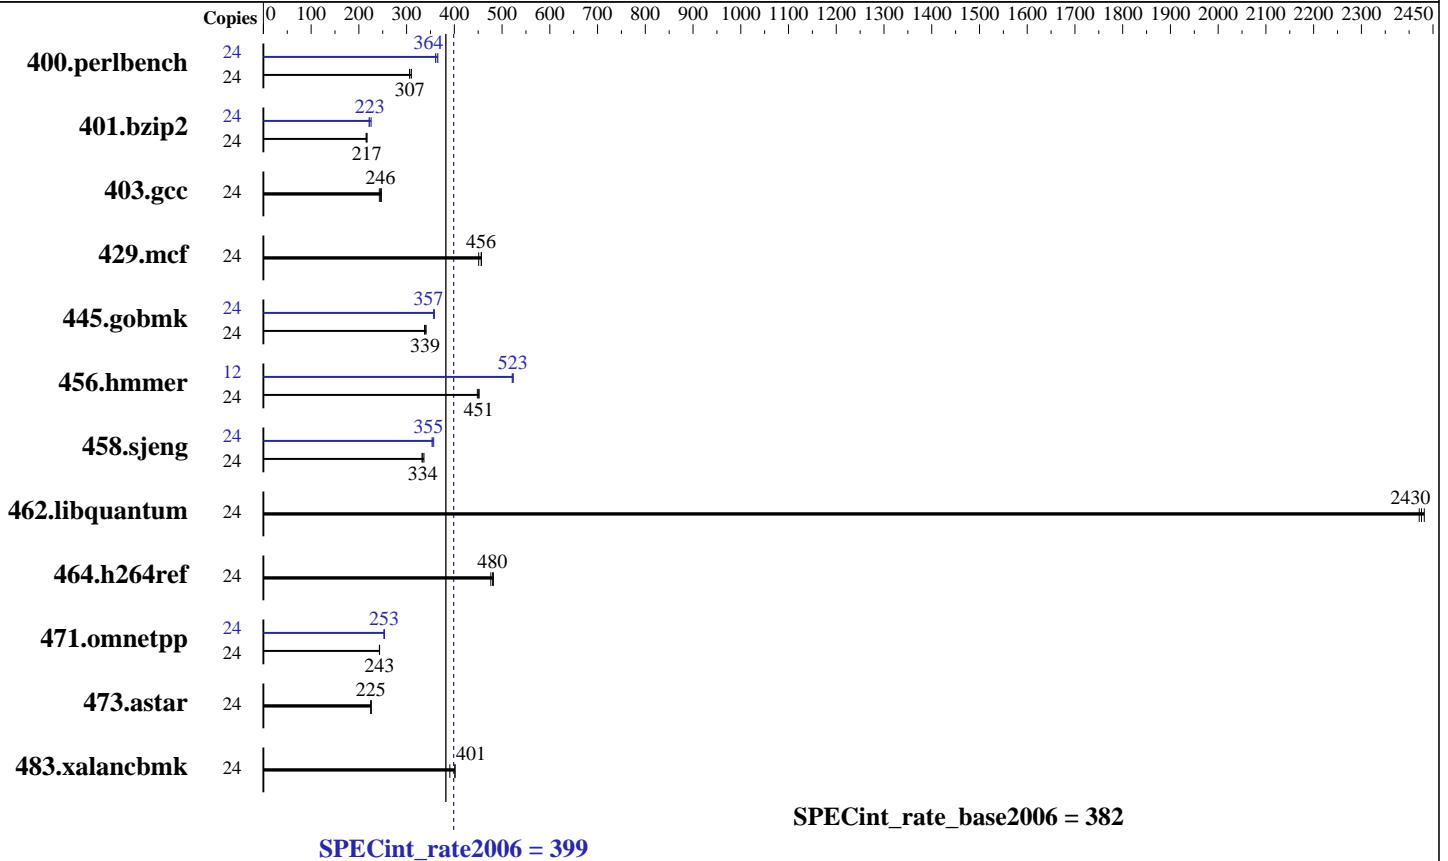

## Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 2 x 146 GB, SAS, 15000 RPM, RAID 0  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server Release 6.2, 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 399

Servidor Itaotec MX224 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 382

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Mar-2012  
Hardware Availability: Jul-2011  
Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	756	310	<b>764</b>	<b>307</b>	766	306	24	650	361	642	365	<b>644</b>	<b>364</b>
401.bzip2	24	1076	215	1068	217	<b>1068</b>	<b>217</b>	24	1026	226	<b>1040</b>	<b>223</b>	1046	221
403.gcc	24	795	243	<b>787</b>	<b>246</b>	782	247	24	795	243	<b>787</b>	<b>246</b>	782	247
429.mcf	24	485	451	<b>480</b>	<b>456</b>	479	457	24	485	451	<b>480</b>	<b>456</b>	479	457
445.gobmk	24	<b>743</b>	<b>339</b>	746	338	738	341	24	<b>704</b>	<b>357</b>	703	358	706	357
456.hammer	24	500	448	<b>496</b>	<b>451</b>	496	452	12	<b>214</b>	<b>523</b>	214	523	215	521
458.sjeng	24	874	332	<b>870</b>	<b>334</b>	863	336	24	822	353	<b>818</b>	<b>355</b>	814	357
462.libquantum	24	204	2430	205	2420	<b>205</b>	<b>2430</b>	24	204	2430	205	2420	<b>205</b>	<b>2430</b>
464.h264ref	24	<b>1106</b>	<b>480</b>	1115	476	1102	482	24	<b>1106</b>	<b>480</b>	1115	476	1102	482
471.omnetpp	24	<b>617</b>	<b>243</b>	616	243	617	243	24	594	253	<b>593</b>	<b>253</b>	591	254
473.astar	24	747	226	748	225	<b>748</b>	<b>225</b>	24	747	226	748	225	<b>748</b>	<b>225</b>
483.xalancbmk	24	424	391	412	401	<b>413</b>	<b>401</b>	24	424	391	412	401	<b>413</b>	<b>401</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.  
DCU Prefetcher disabled in BIOS.

## General Notes

This result was measured on the Servidor Itaotec MX224.  
The Servidor Itaotec MX203+, Servidor Itaotec MX223+ and the Servidor Itaotec MX224 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 399

Servidor Itautec MX224 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 382

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Mar-2012  
Hardware Availability: Jul-2011  
Software Availability: Dec-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64  
458.sjeng: icc -m64  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 399

Servidor Itautec MX224 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 382

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Mar-2012  
Hardware Availability: Jul-2011  
Software Availability: Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmarheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 399

Servidor Itautec MX224 (Intel Xeon X5670)

SPECint\_rate\_base2006 = 382

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Mar-2012  
Hardware Availability: Jul-2011  
Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.html](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.xml](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 07:31:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 April 2012.