SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1607)

SPECint®_rate2006 = 141

SPECint_rate_base2006 = 136

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

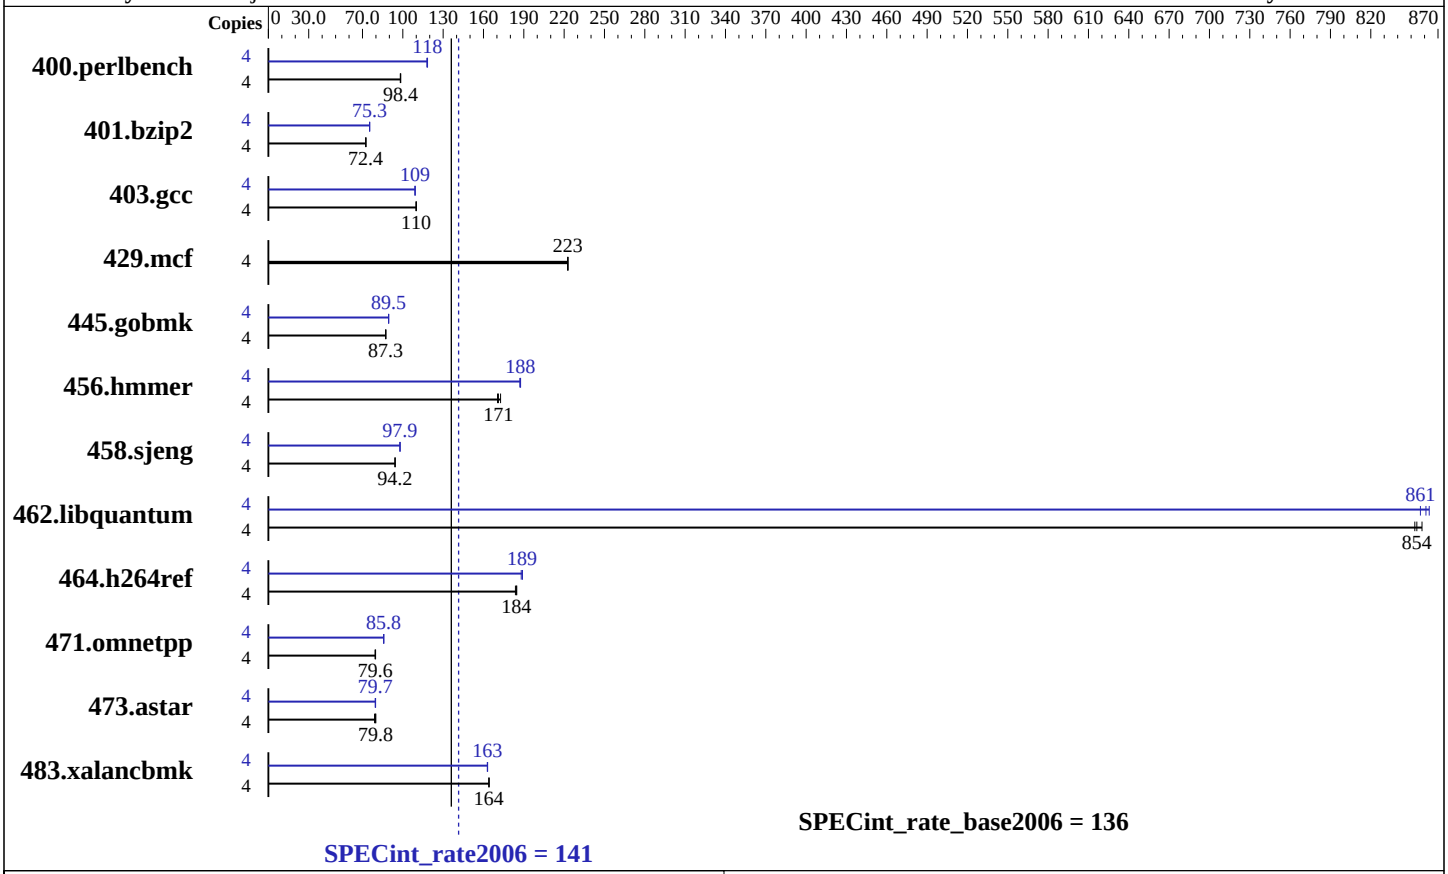

Hardware

CPU Name:	Intel Xeon E5-1607
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB 2Rx8 PC3-12800E-11, ECC, running at 1067 MHz and CL8)
Disk Subsystem:	1 x SATA III, 500 GB, 7200 rpm
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, 2.6.32-220.0.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi - user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap 10 (Multi-Core)

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS M720 (Intel Xeon E5-1607)

SPECint_rate2006 = 141

SPECint_rate_base2006 = 136

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2012
Hardware Availability: Mar-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	**397**	**98.4**	397	98.4	398	98.1	4	332	118	330	118	**330**	**118**
401.bzip2	4	532	72.6	533	72.4	**533**	**72.4**	4	513	75.3	**513**	**75.3**	512	75.4
403.gcc	4	292	110	293	110	**293**	**110**	4	**295**	**109**	295	109	295	109
429.mcf	4	164	223	**164**	**223**	164	223	4	164	223	**164**	**223**	164	223
445.gobmk	4	481	87.2	**480**	**87.3**	480	87.3	4	469	89.5	**469**	**89.5**	469	89.4
456.hmmer	4	**218**	**171**	216	173	219	170	4	**199**	**188**	199	188	200	187
458.sjeng	4	**514**	**94.2**	514	94.2	513	94.3	4	494	97.9	494	97.9	**494**	**97.9**
462.libquantum	4	97.2	853	96.6	858	**97.0**	**854**	4	**96.3**	**861**	96.0	863	96.7	857
464.h264ref	4	482	184	479	185	**480**	**184**	4	**469**	**189**	468	189	471	188
471.omnetpp	4	**314**	**79.6**	315	79.4	313	79.7	4	292	85.7	**291**	**85.8**	291	85.8
473.astar	4	352	79.9	**352**	**79.8**	356	79.0	4	352	79.8	353	79.5	**352**	**79.7**
483.xalancbmk	4	168	164	168	164	**168**	**164**	4	**169**	**163**	169	163	169	163

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used to generate taskset commands
to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS settings:
Frequency Floor Override = Enabled
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/work/cpu2006/libs/32:/work/cpu2006/libs/64"

 Binaries compiled on a system with
 2x Xeon E5-2650 CPU + 64 GB memory using
 Red Hat Enterprise Linux Server release 6.2 (Santiago)
 The RPMs glibc-static-2.12-1.47.el6.x86_64.rpm
 and glibc-static-2.12-1.47.el6.i686.rpm
 were added to enable static linking.

 Transparent Huge Pages disabled with:
```

Continued on next page

General Notes (Continued)

```
echo never  > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc -m64
```

403.gcc: `icc  -m32`

429.mcf: `icc  -m32`

Continued on next page

Peak Compiler Invocation (Continued)

445.gobmk: icc -m32

462.libquantum: icc -m32

464.h264ref: icc -m32

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: -xAVX -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap`

473.astar: `-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap`

483.xalancbmk: `Same as 473.astar`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:03:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.