



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 579

IBM BladeCenter HX5 (Intel Xeon E7-2870, 2.40 GHz)

SPECint_rate_base2006 = 549

CPU2006 license: 11


Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Dec-2011

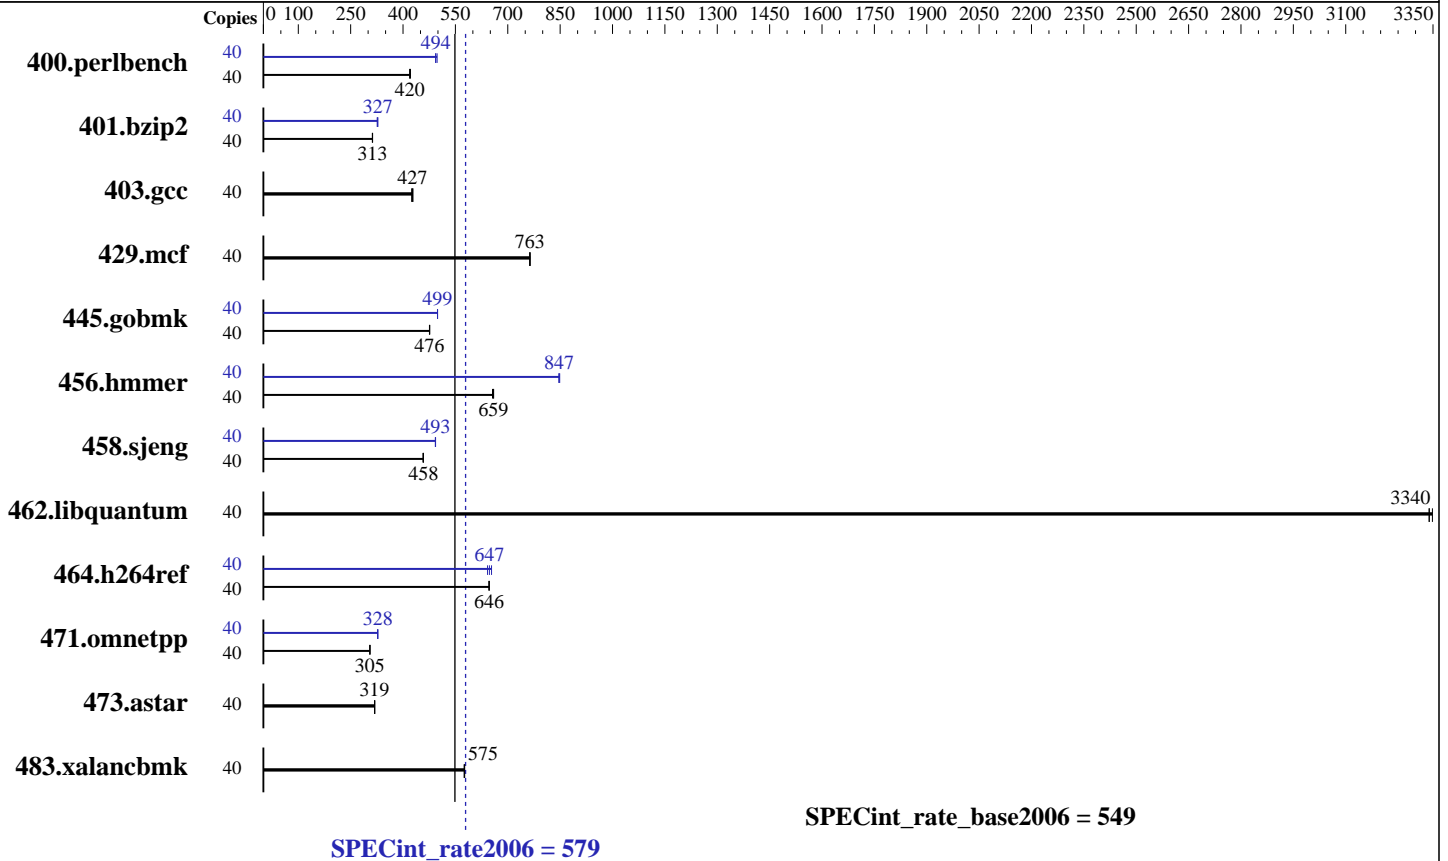

Hardware

CPU Name: Intel Xeon E7-2870
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 4Rx8 PC3-8500R-7, ECC)
 Disk Subsystem: 2 x 50 GB SSD, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 579

IBM BladeCenter HX5 (Intel Xeon E7-2870, 2.40 GHz)

SPECint_rate_base2006 = 549

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	931	420	928	421	933	419	40	792	493	791	494	785	498
401.bzip2	40	1234	313	1237	312	1235	313	40	1184	326	1179	327	1178	328
403.gcc	40	758	425	752	428	754	427	40	758	425	752	428	754	427
429.mcf	40	478	763	478	763	477	764	40	478	763	478	763	477	764
445.gobmk	40	880	477	882	476	882	476	40	841	499	841	499	841	499
456.hammer	40	567	659	566	659	569	656	40	441	847	440	849	441	847
458.sjeng	40	1056	458	1059	457	1056	459	40	982	493	982	493	981	493
462.libquantum	40	248	3350	248	3340	248	3340	40	248	3350	248	3340	248	3340
464.h264ref	40	1368	647	1369	646	1370	646	40	1367	647	1355	653	1379	642
471.omnetpp	40	819	305	819	305	821	305	40	763	327	763	328	763	328
473.astar	40	882	318	880	319	881	319	40	882	318	880	319	881	319
483.xalancbmk	40	479	577	480	575	480	575	40	479	577	480	575	480	575

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Turbo Boost Power Optimization set to Traditional in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on hammerhead-pete Fri Apr 6 14:34:23 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7- 2870 @ 2.40GHz
2 "physical id"s (chips)
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 579

IBM BladeCenter HX5 (Intel Xeon E7-2870, 2.40 GHz)

SPECint_rate_base2006 = 549

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Dec-2011

Platform Notes (Continued)

```

siblings : 20
physical 0: cores 0 1 2 8 9 16 17 18 24 25
physical 1: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB

```

From /proc/meminfo

```

MemTotal:      132134872 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*

```

redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux hammerhead-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 5 16:33

SPEC is set to: /cpu2006.1.2

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/vg_hammerheadpet-lv_root
ext4            89G      5.8G      78G    7% /

```

Additional information from dmidecode:

```

Memory:
16x Samsung M392B1K73BM1-CF8 8 GB 1067 MHz 4 rank

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 579

IBM BladeCenter HX5 (Intel Xeon E7-2870, 2.40 GHz)

SPECint_rate_base2006 = 549

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 579

IBM BladeCenter HX5 (Intel Xeon E7-2870, 2.40 GHz)

SPECint_rate_base2006 = 549

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 579

IBM BladeCenter HX5 (Intel Xeon E7-2870, 2.40 GHz)

SPECint_rate_base2006 = 549

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-WSM-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-WSM-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:57:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.