



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1027GR-TSF (X9DRG-HF, Intel Xeon E5-2660, 3.0GHz)

SPECint®2006 = 46.3

SPECint\_base2006 = 43.0

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

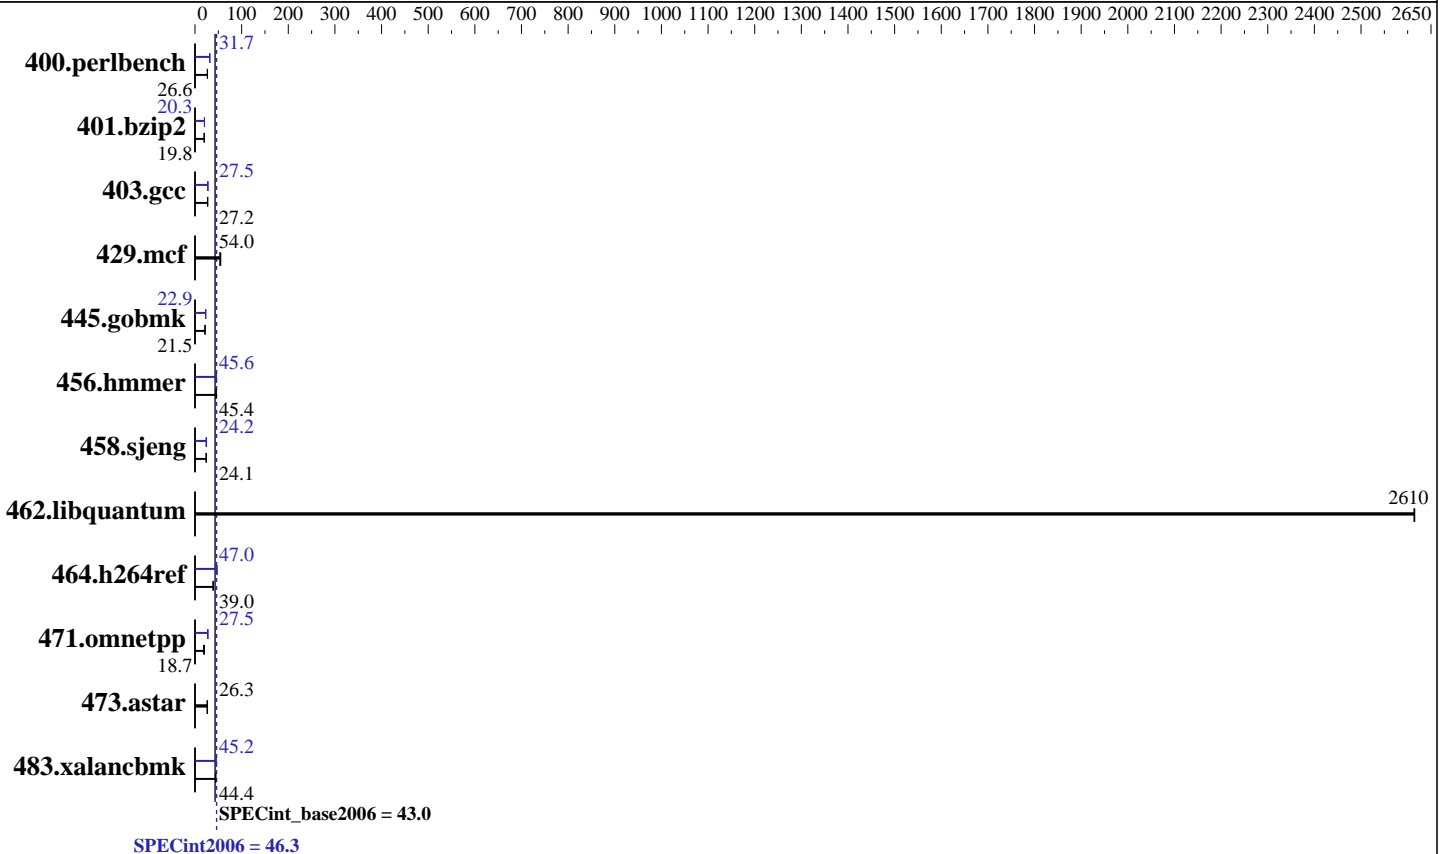

### Hardware

CPU Name: Intel Xeon E5-2660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx8 PC3-12800R-11, ECC, operate @ 1600MHz)  
 Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1027GR-TSF (X9DRG-HF, Intel Xeon E5-2660, 3.0GHz)

SPECint2006 = 46.3

SPECint\_base2006 = 43.0

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2012  
Hardware Availability: Mar-2012  
Software Availability: Oct-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>368</b>	<b>26.6</b>	367	26.6	368	26.6	310	31.5	308	31.7	<b>308</b>	<b>31.7</b>
401.bzip2	<b>488</b>	<b>19.8</b>	487	19.8	488	19.8	476	20.3	476	20.3	<b>476</b>	<b>20.3</b>
403.gcc	297	27.1	<b>296</b>	<b>27.2</b>	296	27.2	291	27.6	293	27.5	<b>292</b>	<b>27.5</b>
429.mcf	171	53.3	165	55.3	<b>169</b>	<b>54.0</b>	171	53.3	165	55.3	<b>169</b>	<b>54.0</b>
445.gobmk	<b>487</b>	<b>21.5</b>	487	21.6	487	21.5	<b>458</b>	<b>22.9</b>	458	22.9	458	22.9
456.hammer	206	45.2	<b>206</b>	<b>45.4</b>	206	45.4	205	45.5	204	45.6	<b>205</b>	<b>45.6</b>
458.sjeng	503	24.1	503	24.1	<b>503</b>	<b>24.1</b>	500	24.2	<b>500</b>	<b>24.2</b>	501	24.2
462.libquantum	<b>7.93</b>	<b>2610</b>	7.92	2620	7.93	2610	<b>7.93</b>	<b>2610</b>	7.92	2620	7.93	2610
464.h264ref	565	39.1	572	38.7	<b>568</b>	<b>39.0</b>	473	46.8	<b>471</b>	<b>47.0</b>	470	47.1
471.omnetpp	334	18.7	306	20.4	<b>333</b>	<b>18.7</b>	<b>227</b>	<b>27.5</b>	228	27.4	227	27.5
473.astar	<b>267</b>	<b>26.3</b>	266	26.4	267	26.3	<b>267</b>	<b>26.3</b>	266	26.4	267	26.3
483.xalancbmk	156	44.4	<b>155</b>	<b>44.4</b>	155	44.4	153	45.2	153	45.2	<b>153</b>	<b>45.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Sat Apr 14 20:40:53 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2660 0 @ 2.20GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 65948756 kB
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1027GR-TSF (X9DRG-HF, Intel Xeon E5-2660, 3.0GHz)

SPECint2006 = 46.3

SPECint\_base2006 = 43.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

### Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 13 09:03

```
SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_home
ext4            162G    86G   68G  56% /home
```

Additional information from dmidecode:

```
Memory:
8x Hynix Semiconducto HMT31GR7CFR4C 8 GB 1600 MHz 1 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1027GR-TSF (X9DRG-HF, Intel Xeon E5-2660, 3.0GHz)

SPECint2006 = 46.3

SPECint\_base2006 = 43.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs -L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1027GR-TSF (X9DRG-HF, Intel Xeon E5-2660, 3.0GHz)

SPECint2006 = 46.3

SPECint\_base2006 = 43.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
            -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias
             -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 1027GR-TSF (X9DRG-HF, Intel Xeon E5-2660, 3.0GHz)

**SPECint2006 = 46.3**

**SPECint\_base2006 = 43.0**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 04:56:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 May 2012.