



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 332

IBM System x3550 M4 (Intel Xeon E5-2630L)

SPECfp_rate_base2006 = 324

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

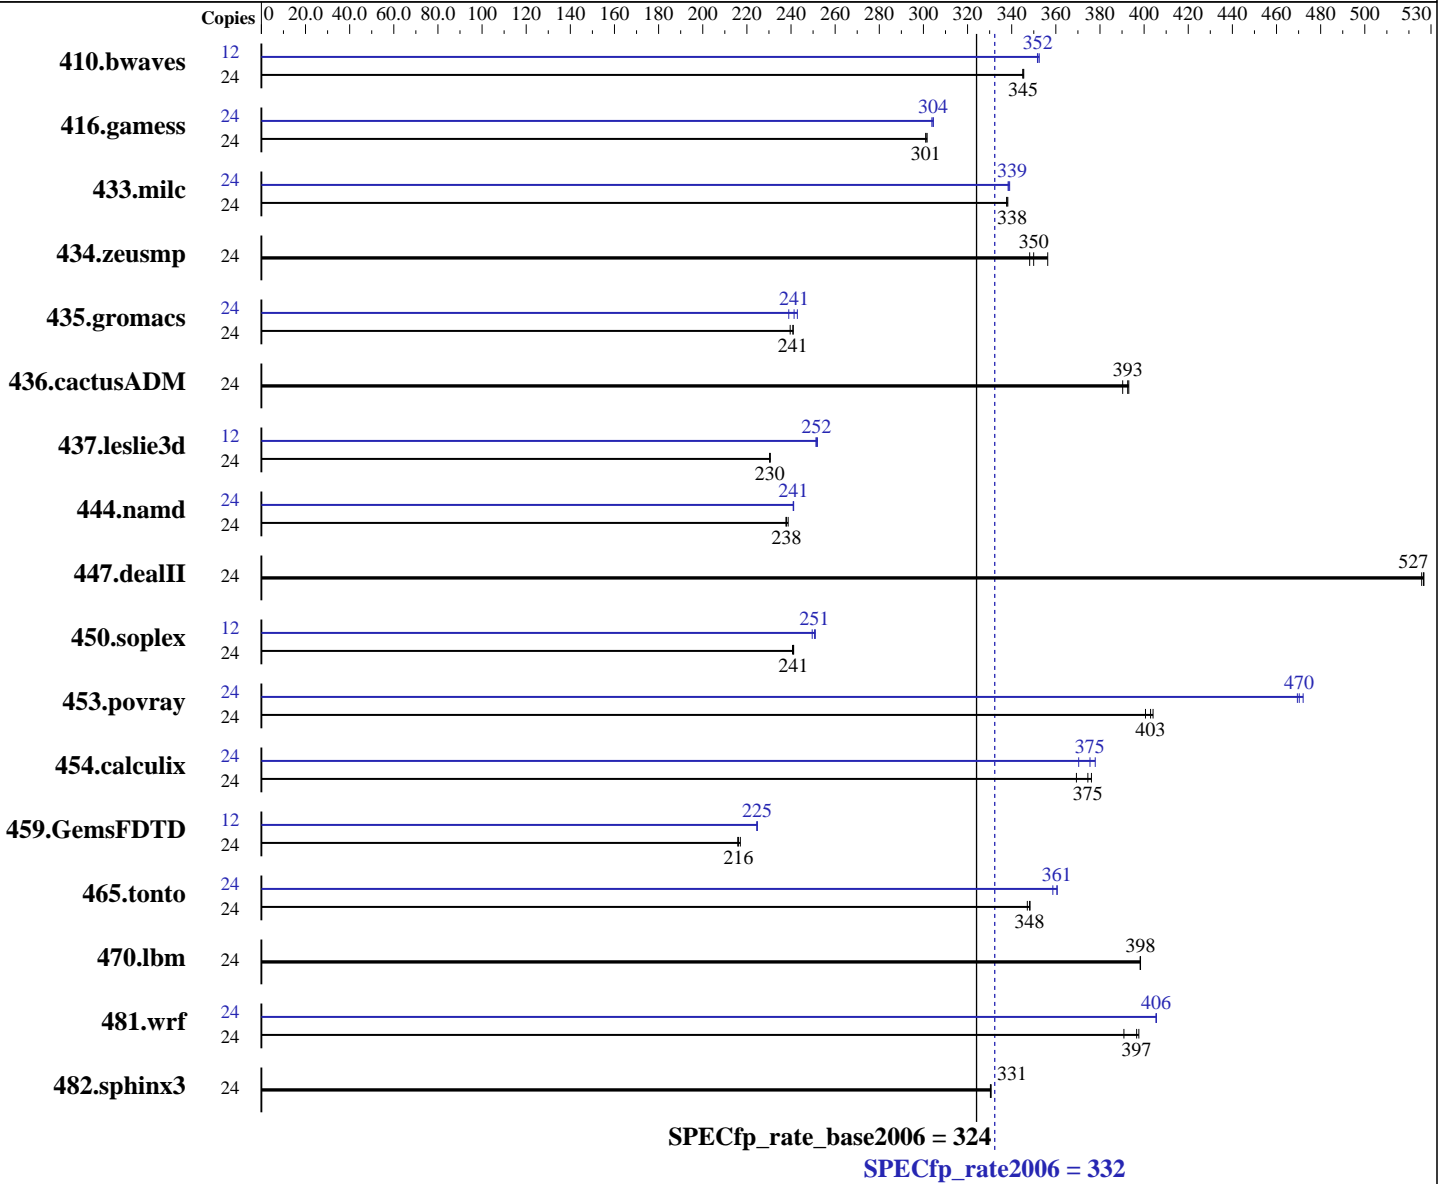

Hardware

CPU Name: Intel Xeon E5-2630L
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)
 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **332**

IBM System x3550 M4 (Intel Xeon E5-2630L)

SPECfp_rate_base2006 = **324**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 1 x 1 TB SAS, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	944	345	945	345	945	345	12	463	352	463	352	464	352		
416.gamess	24	1560	301	1558	302	1561	301	24	1543	304	1544	304	1547	304		
433.milc	24	651	338	652	338	652	338	24	651	338	650	339	651	339		
434.zeusmp	24	624	350	627	348	613	356	24	624	350	627	348	613	356		
435.gromacs	24	715	240	712	241	711	241	24	710	241	706	243	717	239		
436.cactusADM	24	735	390	730	393	731	393	24	735	390	730	393	731	393		
437.leslie3d	24	979	230	978	231	979	230	12	448	252	448	252	449	251		
444.namd	24	809	238	810	238	806	239	24	798	241	798	241	799	241		
447.dealII	24	522	526	521	527	521	527	24	522	526	521	527	521	527		
450.soplex	24	830	241	830	241	832	241	12	399	251	401	250	399	251		
453.povray	24	317	403	316	404	319	401	24	270	472	271	470	272	469		
454.calculix	24	529	375	536	369	526	376	24	524	378	535	370	527	375		
459.GemsFDTD	24	1180	216	1178	216	1173	217	12	567	225	567	225	567	225		
465.tonto	24	678	348	678	348	680	347	24	655	361	658	359	655	361		
470.lbm	24	828	398	828	398	828	398	24	828	398	828	398	828	398		
481.wrf	24	676	397	674	398	686	391	24	661	405	661	406	661	406		
482.sphinx3	24	1415	331	1415	331	1416	330	24	1415	331	1415	331	1416	330		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 332

IBM System x3550 M4 (Intel Xeon E5-2630L)

SPECfp_rate_base2006 = 324

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Oct-2011

Platform Notes

BIOS Settings:

Operating Mode set to Maximum Performance

Sysinfo program /root/SPECcpu-v1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on x3550M4 Sat Apr 14 06:40:15 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2630L 0 @ 2.00GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

cache size : 15360 KB

From /proc/meminfo

MemTotal: 132237084 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsc_release -d

Red Hat Enterprise Linux Server release 6.1 (Santiago)

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux x3550M4 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10 15:42:40 EDT 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 13 15:09

SPEC is set to: /root/SPECcpu-v1.2

Filesystem Type Size Used Avail Use% Mounted on

/dev/mapper/vg_x3550m4-lv_root
ext4 790G 69G 681G 10% /

Additional information from dmidecode:

Memory:

16x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 332

IBM System x3550 M4 (Intel Xeon E5-2630L)

SPECfp_rate_base2006 = 324

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/SPECcpu-v1.2/libs/32:/root/SPECcpu-v1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 332

IBM System x3550 M4 (Intel Xeon E5-2630L)

SPECfp_rate_base2006 = 324

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 332

IBM System x3550 M4 (Intel Xeon E5-2630L)

SPECfp_rate_base2006 = 324

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 332

IBM System x3550 M4 (Intel Xeon E5-2630L)

SPECfp_rate_base2006 = 324

CPU2006 license: 11

Test date: Apr-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:07:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 May 2012.