



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7047R-TXRF (X9DRX+-F, Intel Xeon E5-2609)

SPECint®_rate2006 = 221

SPECint_rate_base2006 = 213

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

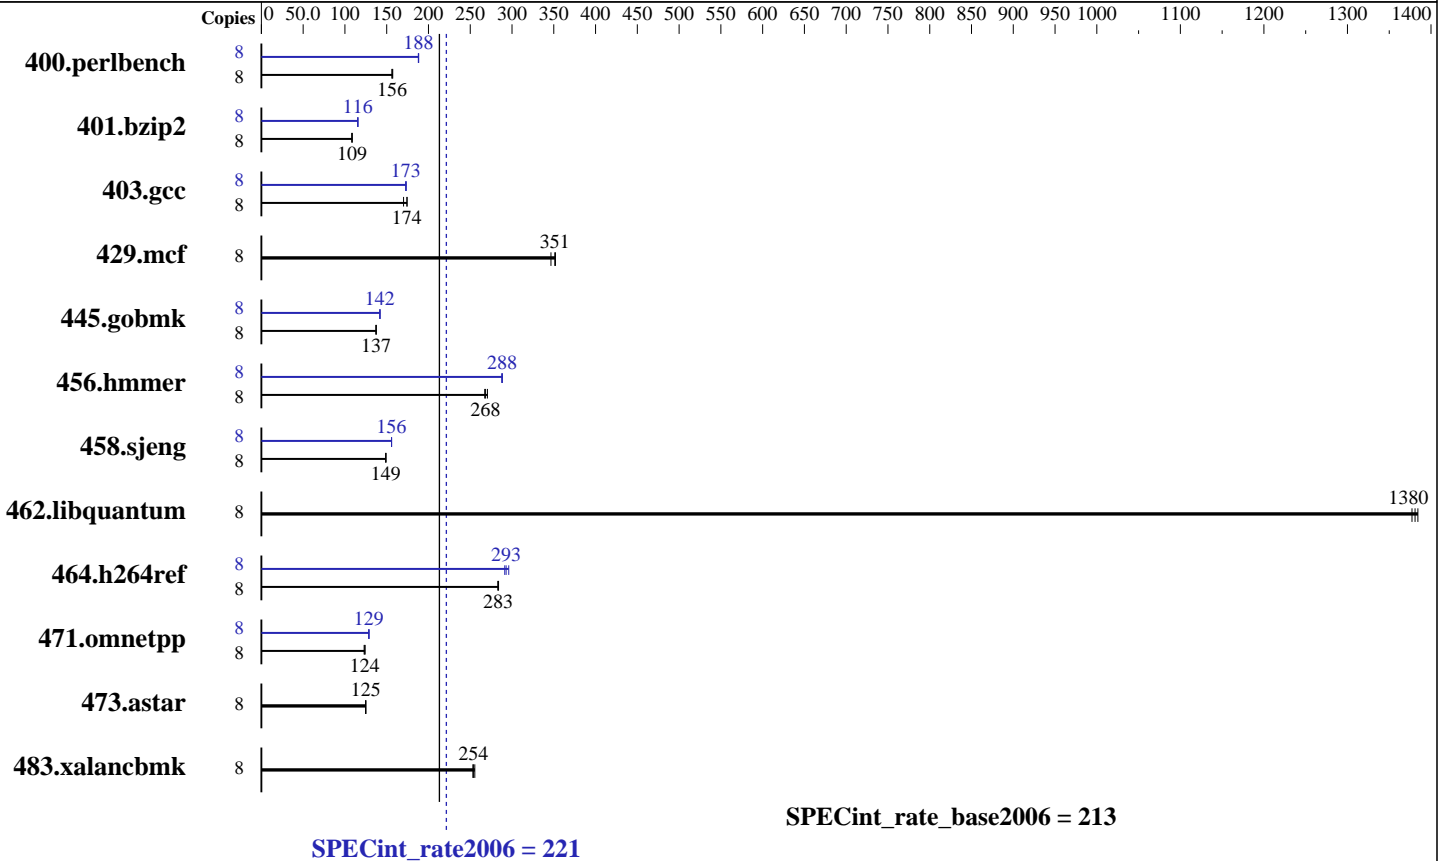

Hardware

CPU Name: Intel Xeon E5-2609
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 1 x 2 TB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7047R-TXRF (X9DRX+-F, Intel Xeon E5-2609)

SPECint_rate2006 = 221

SPECint_rate_base2006 = 213

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	497	157	500	156	500	156	8	415	188	416	188	415	188
401.bzip2	8	711	109	710	109	713	108	8	668	116	670	115	668	116
403.gcc	8	370	174	369	174	378	170	8	373	173	371	173	372	173
429.mcf	8	207	352	208	351	211	347	8	207	352	208	351	211	347
445.gobmk	8	610	138	612	137	611	137	8	592	142	590	142	592	142
456.hammer	8	279	267	278	268	276	271	8	259	288	259	288	259	288
458.sjeng	8	649	149	650	149	650	149	8	621	156	621	156	621	156
462.libquantum	8	120	1380	120	1380	120	1380	8	120	1380	120	1380	120	1380
464.h264ref	8	624	284	625	283	625	283	8	604	293	608	291	598	296
471.omnetpp	8	403	124	404	124	407	123	8	389	129	388	129	389	129
473.astar	8	450	125	450	125	449	125	8	450	125	450	125	449	125
483.xalancbmk	8	216	255	218	254	218	253	8	216	255	218	254	218	253

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7047R-TXRF (X9DRX+-F, Intel Xeon E5-2609)

SPECint_rate2006 = 221

SPECint_rate_base2006 = 213

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7047R-TXRF (X9DRX+-F, Intel Xeon E5-2609)

SPECint_rate2006 = 221

SPECint_rate_base2006 = 213

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias
403.gcc: -xAVX -ipo -O3 -no-prec-div
429.mcf: basepeak = yes
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3
456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto-ilp32
462.libquantum: basepeak = yes
464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap
473.astar: basepeak = yes
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 7047R-TXRF (X9DRX+-F, Intel Xeon E5-2609)

SPECint_rate2006 = 221

SPECint_rate_base2006 = 213

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 08:12:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2012.