



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6284 SE

SPECint[®]_rate2006 = 573

SPECint_rate_base2006 = 499

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

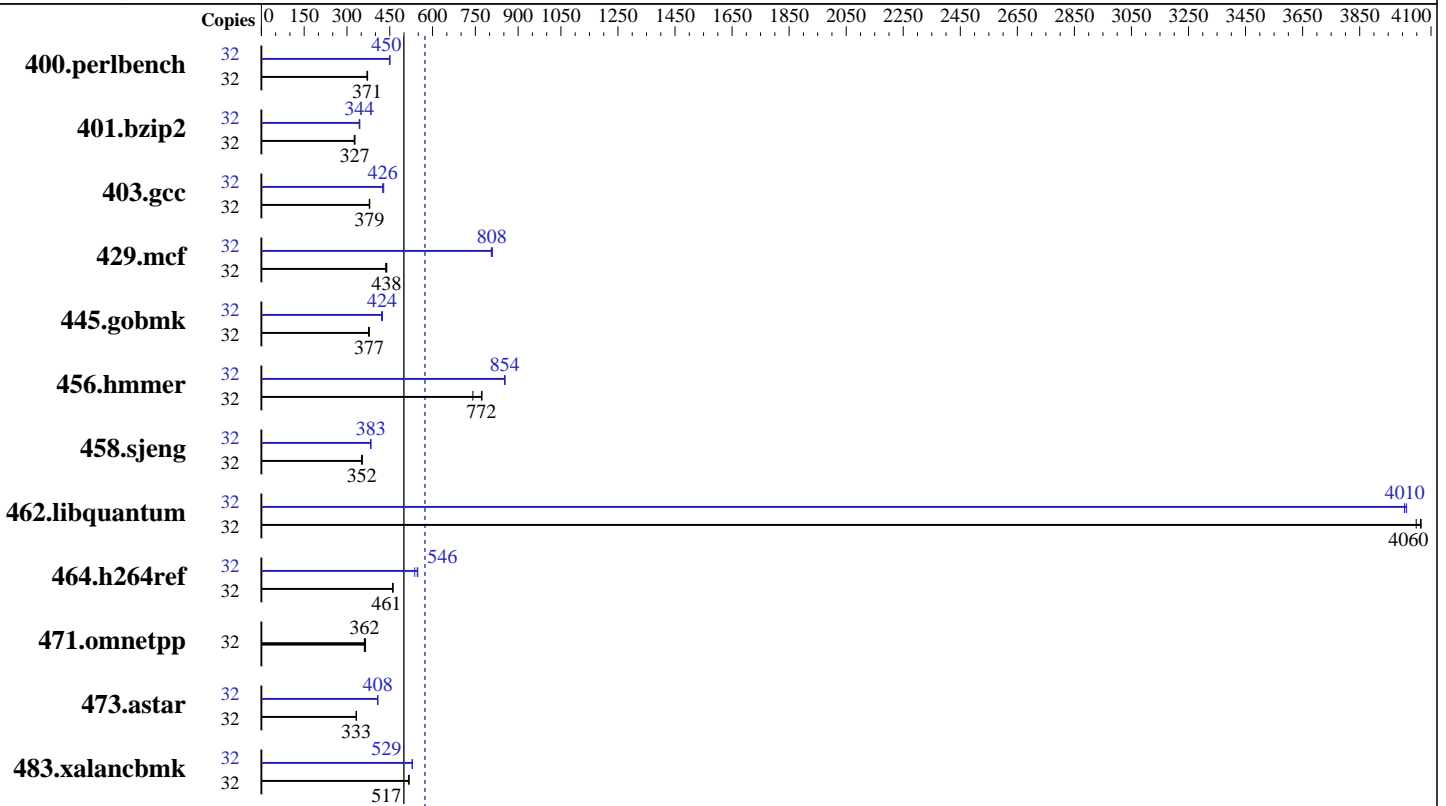

SPECint_rate2006 = 573

SPECint_rate_base2006 = 499

Hardware

CPU Name: AMD Opteron 6284 SE
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 512 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2,
Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.1 of x86 Open64 Compiler Suite
(from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6284 SE

SPECint_rate2006 = 573

SPECint_rate_base2006 = 499

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	842	371	844	370	839	372	32	694	451	696	449	694	450
401.bzip2	32	949	326	944	327	942	328	32	895	345	901	343	897	344
403.gcc	32	678	380	680	379	681	378	32	601	429	606	425	604	426
429.mcf	32	670	436	664	440	666	438	32	360	810	361	808	362	806
445.gobmk	32	888	378	893	376	889	377	32	791	425	797	421	792	424
456.hammer	32	387	772	403	741	386	773	32	350	854	350	854	350	852
458.sjeng	32	1094	354	1103	351	1100	352	32	1012	383	1010	383	1008	384
462.libquantum	32	163	4060	164	4050	163	4070	32	165	4010	165	4010	165	4010
464.h264ref	32	1537	461	1538	460	1535	461	32	1317	538	1292	548	1296	546
471.omnetpp	32	553	362	548	365	554	361	32	553	362	548	365	554	361
473.astar	32	674	333	676	333	675	333	32	551	408	551	408	551	408
483.xalancbmk	32	427	517	427	517	427	518	32	418	528	417	529	417	529

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-rate-libs-revC/32:/root/work/cpu2006v1.2/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6284 SE

SPECint_rate2006 = 573

SPECint_rate_base2006 = 499

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6284 SE

SPECint_rate2006 = 573

SPECint_rate_base2006 = 499

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
 -GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bd=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6284 SE

SPECint_rate2006 = 573

SPECint_rate_base2006 = 499

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
-OPT:unroll_times_max=16 -LNO:prefetch=2
-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
-CG:p2align=0 -INLINE:aggressive=ON -IPA:plimit=15000
-IPA:small_pu=100 -HP:bd=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -IPA:plimit=20000
-OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bd=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6284 SE

SPECint_rate2006 = 573

SPECint_rate_base2006 = 499

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:26:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 June 2012.