



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2658, 2.10 GHz)

SPECfp<sup>®</sup>\_rate2006 = 399

SPECfp\_rate\_base2006 = 388

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

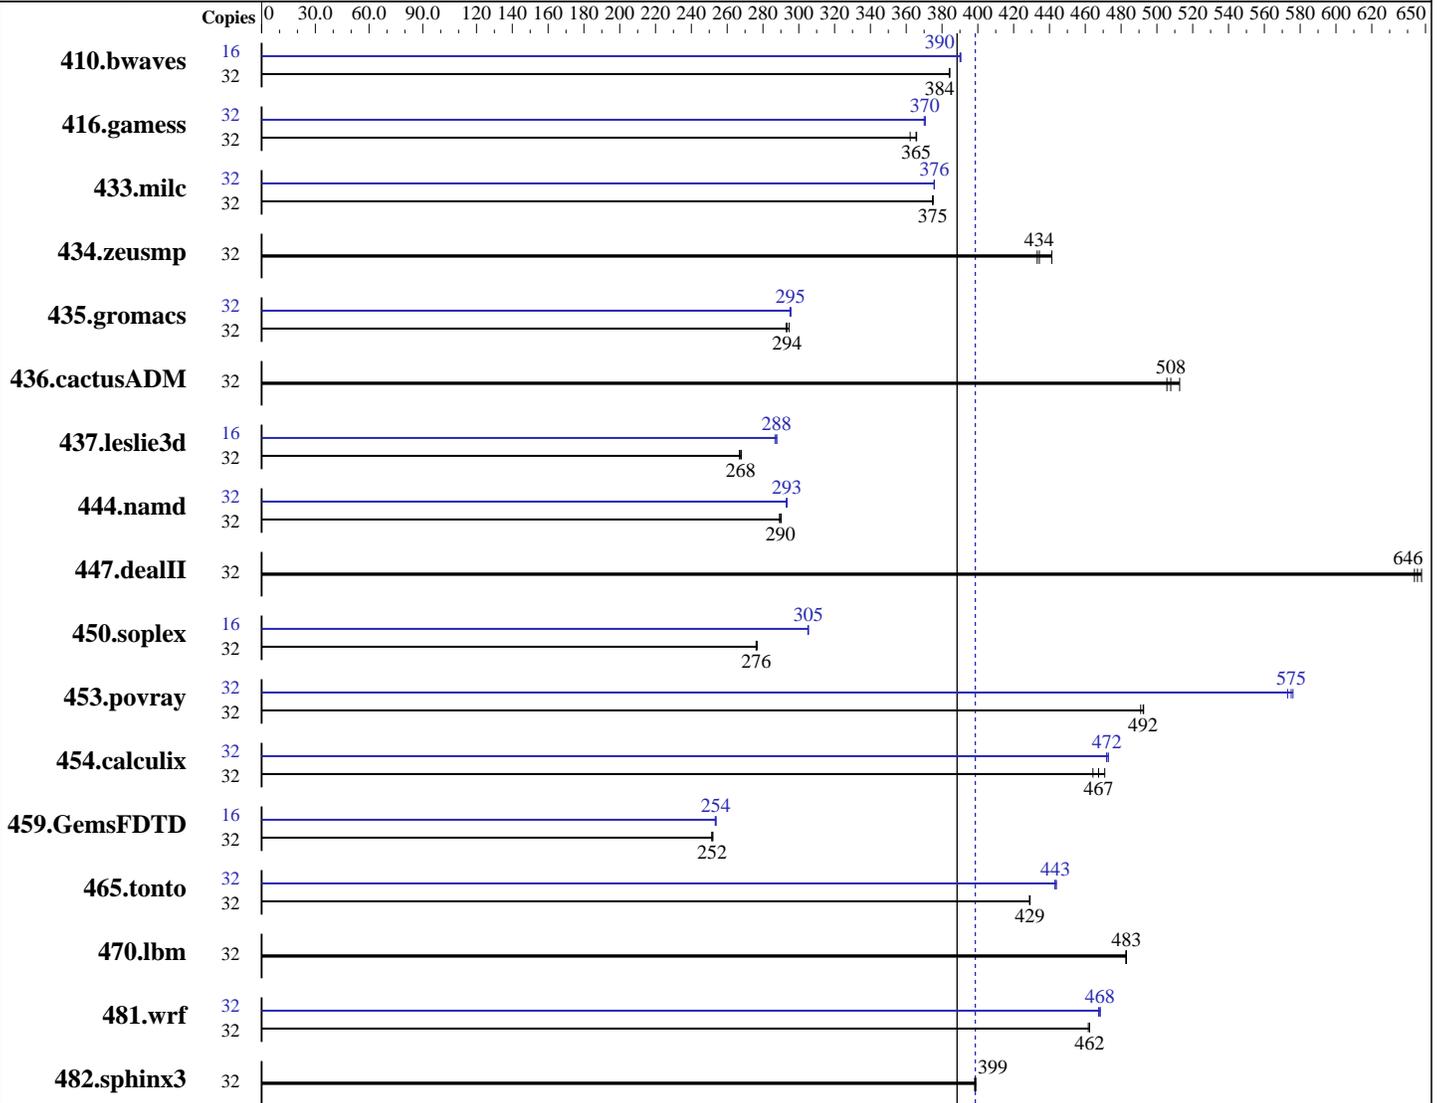

SPECfp\_rate\_base2006 = 388

SPECfp\_rate2006 = 399

### Hardware

CPU Name: Intel Xeon E5-2658  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM Flex System x240  
(Intel Xeon E5-2658, 2.10 GHz)

SPECfp\_rate2006 = 399

SPECfp\_rate\_base2006 = 388

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2012  
Hardware Availability: May-2012  
Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1131	384	<u>1132</u>	<u>384</u>	1132	384	16	557	390	557	390	<u>557</u>	<u>390</u>
416.gamess	32	1730	362	<u>1714</u>	<u>365</u>	1713	366	32	1691	371	1693	370	<u>1691</u>	<u>370</u>
433.milc	32	<u>784</u>	<u>375</u>	784	375	783	375	32	782	376	782	376	<u>782</u>	<u>376</u>
434.zeusmp	32	<u>670</u>	<u>434</u>	672	433	660	441	32	<u>670</u>	<u>434</u>	672	433	660	441
435.gromacs	32	776	295	780	293	<u>778</u>	<u>294</u>	32	773	296	<u>774</u>	<u>295</u>	774	295
436.cactusADM	32	756	506	746	513	<u>753</u>	<u>508</u>	32	756	506	746	513	<u>753</u>	<u>508</u>
437.leslie3d	32	1128	267	<u>1124</u>	<u>268</u>	1123	268	16	<u>523</u>	<u>288</u>	525	287	523	288
444.namd	32	884	290	<u>886</u>	<u>290</u>	887	289	32	<u>875</u>	<u>293</u>	876	293	875	293
447.dealII	32	<u>567</u>	<u>646</u>	565	648	569	644	32	<u>567</u>	<u>646</u>	565	648	569	644
450.soplex	32	966	276	964	277	<u>966</u>	<u>276</u>	16	<u>437</u>	<u>305</u>	437	305	437	305
453.povray	32	<u>346</u>	<u>492</u>	346	493	347	491	32	296	576	<u>296</u>	<u>575</u>	297	573
454.calculix	32	<u>565</u>	<u>467</u>	569	464	561	471	32	<u>559</u>	<u>472</u>	558	473	559	472
459.GemsFDTD	32	1347	252	1351	251	<u>1349</u>	<u>252</u>	16	669	254	670	253	<u>669</u>	<u>254</u>
465.tonto	32	734	429	<u>734</u>	<u>429</u>	734	429	32	709	444	711	443	<u>710</u>	<u>443</u>
470.lbm	32	910	483	<u>910</u>	<u>483</u>	911	483	32	910	483	<u>910</u>	<u>483</u>	911	483
481.wrf	32	<u>773</u>	<u>462</u>	773	462	774	462	32	765	467	<u>764</u>	<u>468</u>	763	468
482.sphinx3	32	1563	399	1566	398	<u>1565</u>	<u>399</u>	32	1563	399	1566	398	<u>1565</u>	<u>399</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x240  
(Intel Xeon E5-2658, 2.10 GHz)

**SPECfp\_rate2006 = 399**

**SPECfp\_rate\_base2006 = 388**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2012  
**Hardware Availability:** May-2012  
**Software Availability:** Dec-2011

## Platform Notes (Continued)

running on blacktip-pete Thu May 17 08:41:13 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2658 0 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
 cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132136204 kB
HugePages_Total:       0
Hugepagesize:       2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux blacktip-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 16 16:47
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_blacktippete-lv_root
                ext4      265G  6.0G  246G   3% /
```

```
Additional information from dmidecode:
Memory:
4x Hynix HMT31GR7CFR4C-PB 8 GB 1600 MHz 2 rank
12x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x240  
(Intel Xeon E5-2658, 2.10 GHz)

**SPECfp\_rate2006 = 399**

**SPECfp\_rate\_base2006 = 388**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2012  
**Hardware Availability:** May-2012  
**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x240  
(Intel Xeon E5-2658, 2.10 GHz)

**SPECfp\_rate2006 = 399**

**SPECfp\_rate\_base2006 = 388**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex: icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
447.dealII: `-DSPEC_CPU_LP64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x240  
(Intel Xeon E5-2658, 2.10 GHz)

**SPECfp\_rate2006 = 399**

**SPECfp\_rate\_base2006 = 388**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM Flex System x240  
(Intel Xeon E5-2658, 2.10 GHz)

**SPECfp\_rate2006 = 399**

**SPECfp\_rate\_base2006 = 388**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2012  
**Hardware Availability:** May-2012  
**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 05:22:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 June 2012.