



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 731**

PowerEdge R820 (Intel Xeon E5-4620, 2.20 GHz)

**SPECfp\_rate\_base2006 = 710**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

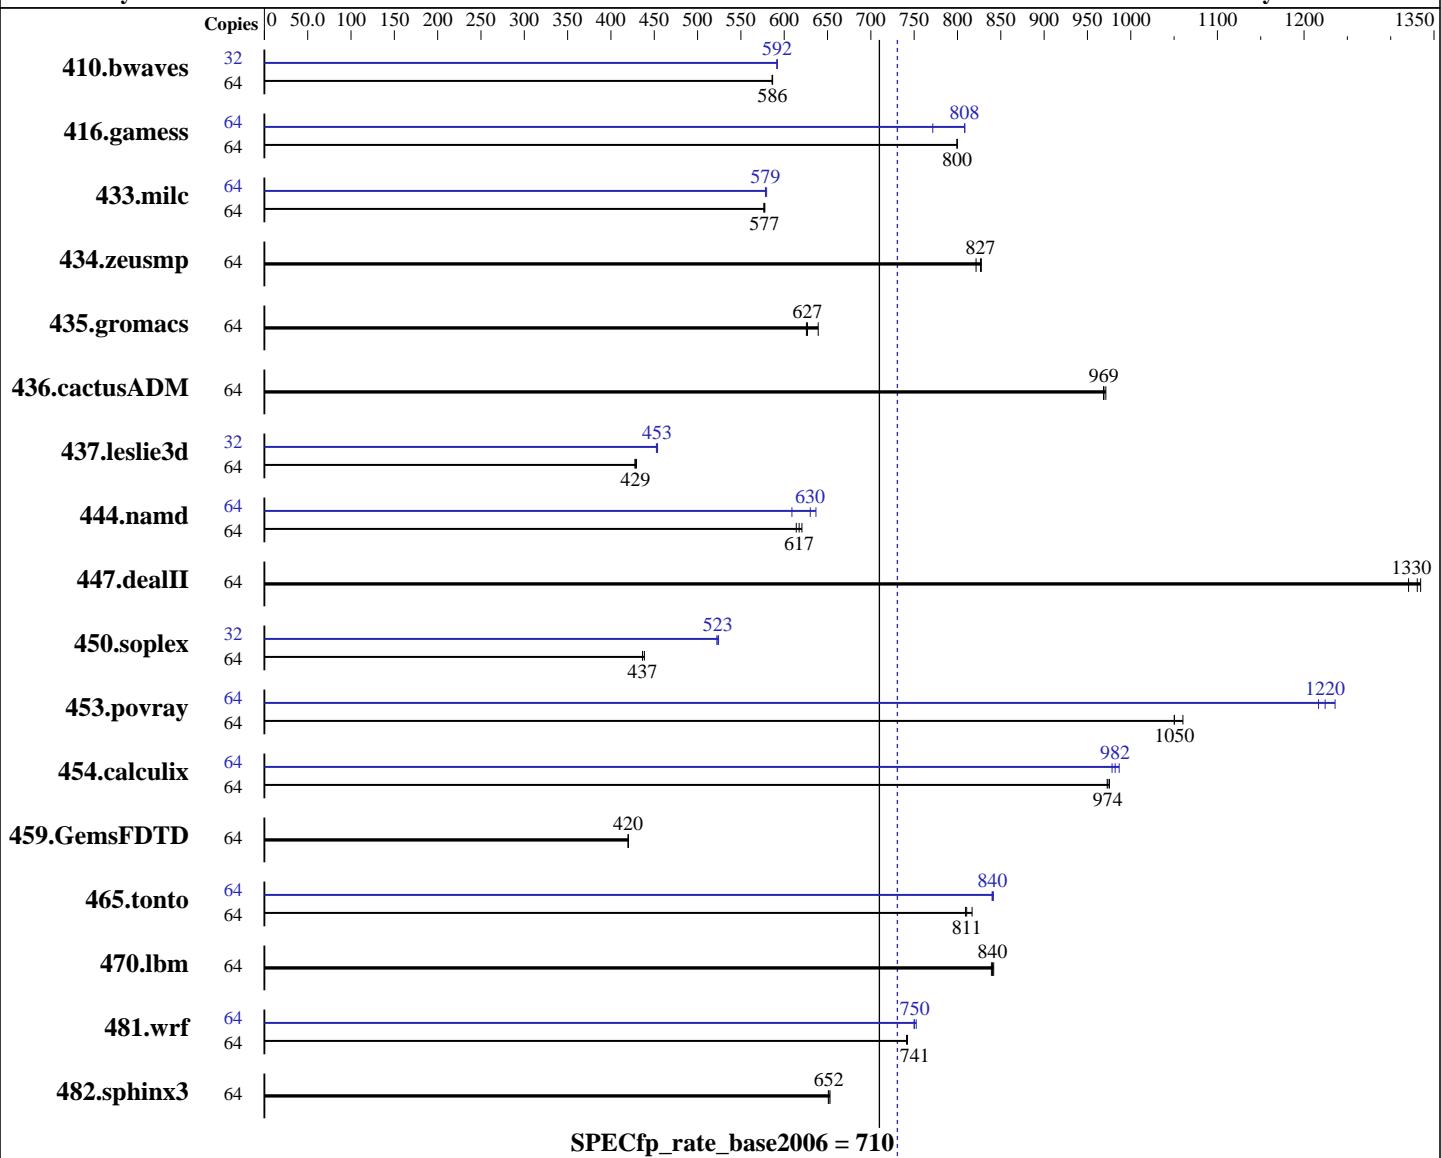

## Hardware

CPU Name: Intel Xeon E5-4620  
CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64)  
3.0.13-0.27-default  
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 731**

PowerEdge R820 (Intel Xeon E5-4620, 2.20 GHz)

**SPECfp\_rate\_base2006 = 710**

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache:	16 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem:	4 x 300 GB 10000 RPM SAS, RAID 0
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1484	586	<b>1484</b>	<b>586</b>	1483	587	32	735	592	735	592	<b>735</b>	<b>592</b>		
416.gamess	64	1567	800	<b>1567</b>	<b>800</b>	1567	800	64	1550	808	1550	808	1624	771		
433.milc	64	<b>1018</b>	<b>577</b>	1019	576	1017	578	64	<b>1016</b>	<b>579</b>	1016	578	1013	580		
434.zeusmp	64	<b>705</b>	<b>827</b>	709	821	704	828	64	<b>705</b>	<b>827</b>	709	821	704	828		
435.gromacs	64	715	639	<b>729</b>	<b>627</b>	730	626	64	715	639	<b>729</b>	<b>627</b>	730	626		
436.cactusADM	64	790	969	787	971	<b>789</b>	<b>969</b>	64	790	969	787	971	<b>789</b>	<b>969</b>		
437.leslie3d	64	<b>1404</b>	<b>429</b>	1407	428	1401	429	32	663	454	<b>664</b>	<b>453</b>	665	452		
444.namd	64	827	620	836	614	<b>832</b>	<b>617</b>	64	<b>815</b>	<b>630</b>	843	609	806	637		
447.dealII	64	549	1330	<b>550</b>	<b>1330</b>	554	1320	64	549	1330	<b>550</b>	<b>1330</b>	554	1320		
450.soplex	64	1217	439	<b>1223</b>	<b>437</b>	1223	436	32	511	522	<b>510</b>	<b>523</b>	509	524		
453.povray	64	321	1060	<b>324</b>	<b>1050</b>	324	1050	64	276	1240	<b>278</b>	<b>1220</b>	280	1220		
454.calculix	64	541	975	<b>542</b>	<b>974</b>	543	973	64	535	987	540	978	<b>538</b>	<b>982</b>		
459.GemsFDTD	64	1616	420	1617	420	<b>1617</b>	<b>420</b>	64	1616	420	1617	420	<b>1617</b>	<b>420</b>		
465.tonto	64	778	809	771	817	<b>777</b>	<b>811</b>	64	748	841	750	840	<b>749</b>	<b>840</b>		
470.lbm	64	<b>1046</b>	<b>840</b>	1048	839	1045	842	64	<b>1046</b>	<b>840</b>	1048	839	1045	842		
481.wrf	64	964	741	963	742	<b>964</b>	<b>741</b>	64	953	750	950	752	<b>953</b>	<b>750</b>		
482.sphinx3	64	<b>1914</b>	<b>652</b>	1911	653	1916	651	64	<b>1914</b>	<b>652</b>	1911	653	1916	651		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 731**

PowerEdge R820 (Intel Xeon E5-4620, 2.20 GHz)

**SPECfp\_rate\_base2006 = 710**

**CPU2006 license:** 55

**Test date:** Mar-2012

**Test sponsor:** Dell Inc.

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Platform Notes

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost set to Enabled

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on icon4p Wed Mar 14 01:29:06 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4620 0 @ 2.20GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB
```

```
From /proc/meminfo
MemTotal:      264501512 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux icon4p 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 13 09:42 last=S
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2       ext3  1.1T  123G  917G  12% /
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 731**

PowerEdge R820 (Intel Xeon E5-4620, 2.20 GHz)

**SPECfp\_rate\_base2006 = 710**

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Platform Notes (Continued)

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

The Dell PowerEdge R820 and

the Bull NovaScale R470 F3 Models are electronically equivalent.

The results have been measured on a Dell PowerEdge R820 model.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R820 (Intel Xeon E5-4620, 2.20 GHz)

**SPECfp\_rate2006 = 731**

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 731**

PowerEdge R820 (Intel Xeon E5-4620, 2.20 GHz)

**SPECfp\_rate\_base2006 = 710**

**CPU2006 license:** 55

**Test date:** Mar-2012

**Test sponsor:** Dell Inc.

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
    -opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
    -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -prof-use(pass 2) -static

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 731**

PowerEdge R820 (Intel Xeon E5-4620, 2.20 GHz)

**SPECfp\_rate\_base2006 = 710**

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:48:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.