



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECint<sup>®</sup>\_rate2006 = 392

Compute Blade 2000 (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 375

CPU2006 license: 35


Test date: May-2012

Test sponsor: HITACHI

Hardware Availability: Apr-2012

Tested by: HITACHI

Software Availability: Feb-2012

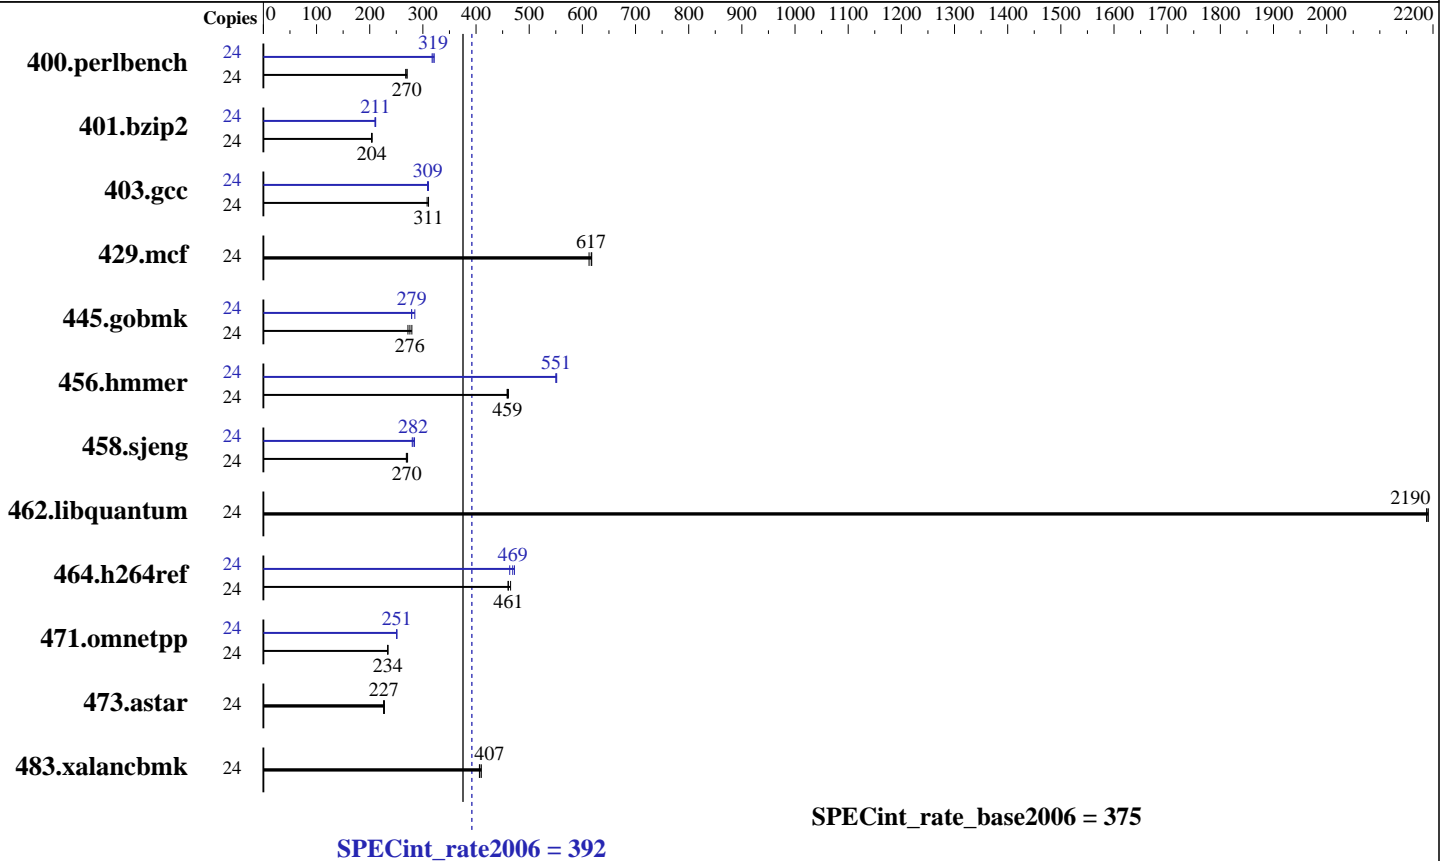

### Hardware

CPU Name: Intel Xeon E5-2630L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-10600R-9, ECC)  
 Disk Subsystem: 2 x 300 GB SAS, 10000 RPM RAID1 configuration  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.4.2.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECint\_rate2006 = 392

Compute Blade 2000 (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 375

CPU2006 license: 35

Test date: May-2012

Test sponsor: HITACHI

Hardware Availability: Apr-2012

Tested by: HITACHI

Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>868</b>	<b>270</b>	876	268	868	270	24	739	317	<b>735</b>	<b>319</b>	730	321
401.bzip2	24	<b>1136</b>	<b>204</b>	1138	203	1132	205	24	1096	211	1103	210	<b>1099</b>	<b>211</b>
403.gcc	24	622	311	627	308	<b>622</b>	<b>311</b>	24	622	311	626	309	<b>624</b>	<b>309</b>
429.mcf	24	357	613	354	618	<b>355</b>	<b>617</b>	24	357	613	354	618	<b>355</b>	<b>617</b>
445.gobmk	24	901	279	<b>914</b>	<b>276</b>	926	272	24	884	285	903	279	<b>903</b>	<b>279</b>
456.hammer	24	<b>488</b>	<b>459</b>	486	461	488	458	24	<b>407</b>	<b>551</b>	406	552	407	550
458.sjeng	24	<b>1076</b>	<b>270</b>	1071	271	1080	269	24	<b>1031</b>	<b>282</b>	1037	280	1022	284
462.libquantum	24	227	2190	227	2190	<b>227</b>	<b>2190</b>	24	227	2190	227	2190	<b>227</b>	<b>2190</b>
464.h264ref	24	1142	465	<b>1153</b>	<b>461</b>	1154	460	24	1146	463	1125	472	<b>1132</b>	<b>469</b>
471.omnetpp	24	641	234	<b>641</b>	<b>234</b>	641	234	24	598	251	598	251	<b>598</b>	<b>251</b>
473.astar	24	740	228	<b>743</b>	<b>227</b>	745	226	24	740	228	<b>743</b>	<b>227</b>	745	226
483.xalancbmk	24	404	410	<b>407</b>	<b>407</b>	408	406	24	404	410	<b>407</b>	<b>407</b>	408	406

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Wed May 23 01:56:14 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2630L 0 @ 2.00GHz  
2 "physical id"s (chips)  
24 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 6  
siblings : 12

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECint\_rate2006 = 392

Compute Blade 2000 (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 375

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2012

Hardware Availability: Apr-2012

Software Availability: Feb-2012

### Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132148312 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.4.2.el6.x86_64 #1 SMP Mon Feb 6
16:39:28 EST 2012 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 23 01:53
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

HITACHI BladeSymphony BS2000 and HITACHI Compute Blade 2000 are electronically equivalent. The results have been measured on a HITACHI BladeSymphony BS2000.

### Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

**SPECint\_rate2006 = 392**

**Compute Blade 2000 (Intel Xeon E5-2630L)**

**SPECint\_rate\_base2006 = 375**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** May-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Feb-2012

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

**SPECint\_rate2006 = 392**

**Compute Blade 2000 (Intel Xeon E5-2630L)**

**SPECint\_rate\_base2006 = 375**

**CPU2006 license:** 35

**Test date:** May-2012

**Test sponsor:** HITACHI

**Hardware Availability:** Apr-2012

**Tested by:** HITACHI

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECint\_rate2006 = 392

Compute Blade 2000 (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 375

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: May-2012

Hardware Availability: Apr-2012

Software Availability: Feb-2012

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:18:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 June 2012.