



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AR385 F1  
AMD Opteron 6278

**SPECint\_rate2006 = 510**

**SPECint\_rate\_base2006 = 443**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

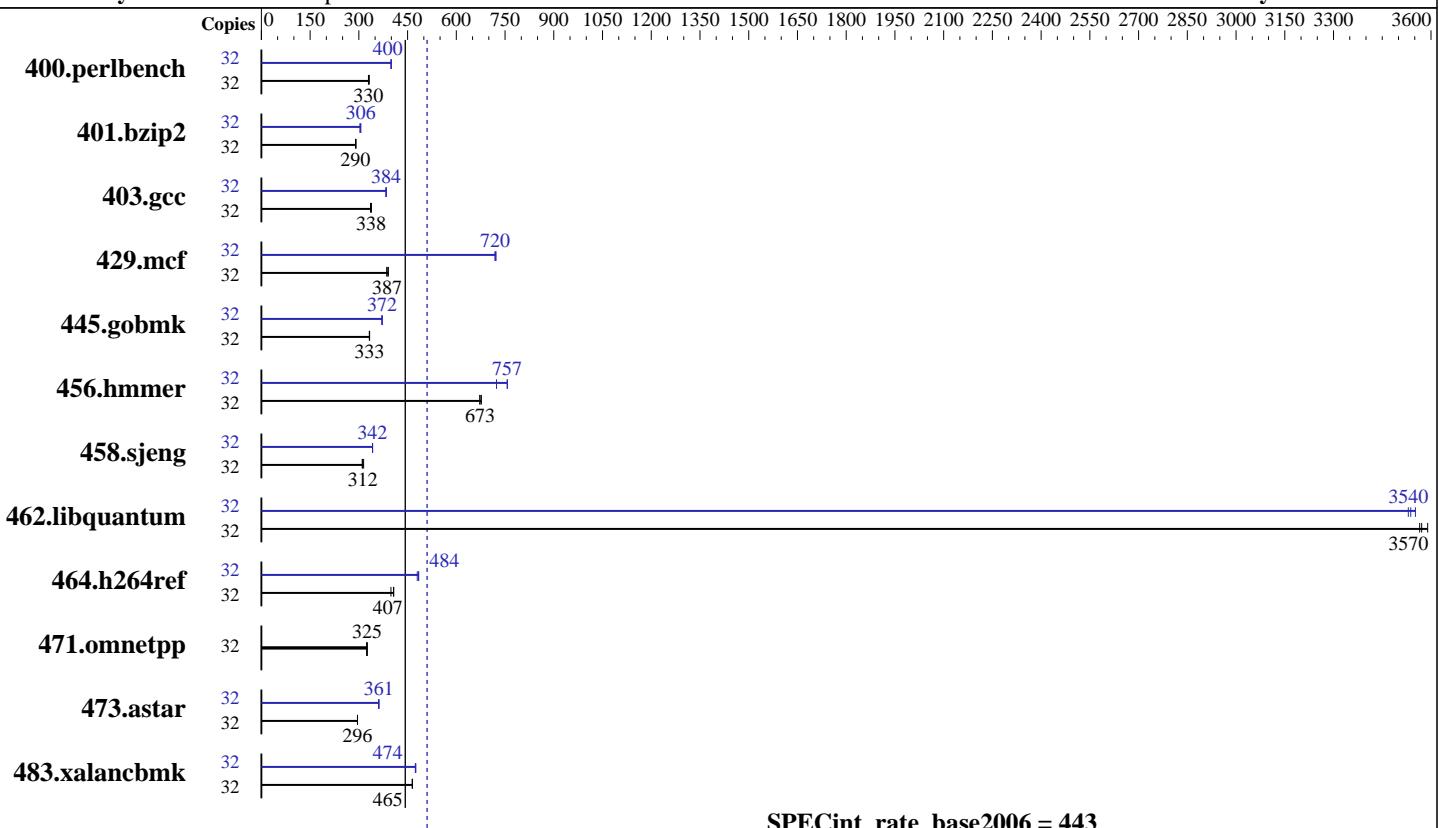

**SPECint\_rate\_base2006 = 443**

**SPECint\_rate2006 = 510**

### Hardware

CPU Name: AMD Opteron 6278  
CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz  
CPU MHz: 2400  
FPU: Integrated  
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 160 GB SSD  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
Kernel 2.6.32-220.el6.x86\_64  
Compiler: C/C++: Version 4.5.1 of x86 Open64 Compiler Suite  
(from AMD)  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AR385 F1  
AMD Opteron 6278

**SPECint\_rate2006 = 510**

**SPECint\_rate\_base2006 = 443**

CPU2006 license: 97

Test date: May-2012

Test sponsor: Acer Incorporated

Hardware Availability: Nov-2011

Tested by: Acer Incorporated

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>947</b>	<b>330</b>	949	330	941	332	32	783	399	<b>783</b>	<b>400</b>	782	400
401.bzip2	32	1060	291	<b>1065</b>	<b>290</b>	1065	290	32	1018	303	1010	306	<b>1010</b>	<b>306</b>
403.gcc	32	761	338	<b>762</b>	<b>338</b>	767	336	32	672	383	670	384	<b>670</b>	<b>384</b>
429.mcf	32	<b>754</b>	<b>387</b>	747	391	756	386	32	404	722	<b>405</b>	<b>720</b>	406	719
445.gobmk	32	<b>1008</b>	<b>333</b>	1011	332	1008	333	32	903	372	905	371	<b>903</b>	<b>372</b>
456.hmmer	32	441	677	<b>443</b>	<b>673</b>	444	672	32	413	724	394	757	<b>395</b>	<b>757</b>
458.sjeng	32	1230	315	1248	310	<b>1242</b>	<b>312</b>	32	1131	342	<b>1131</b>	<b>342</b>	1132	342
462.libquantum	32	<b>186</b>	<b>3570</b>	186	3570	185	3590	32	187	3550	<b>187</b>	<b>3540</b>	188	3530
464.h264ref	32	1776	399	<b>1741</b>	<b>407</b>	1738	407	32	1476	480	<b>1463</b>	<b>484</b>	1463	484
471.omnetpp	32	614	326	617	324	<b>615</b>	<b>325</b>	32	614	326	617	324	<b>615</b>	<b>325</b>
473.astar	32	<b>759</b>	<b>296</b>	759	296	759	296	32	622	361	621	361	<b>622</b>	<b>361</b>
483.xalancbmk	32	476	464	475	465	<b>475</b>	<b>465</b>	32	464	475	<b>465</b>	<b>474</b>	466	474

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

BIOS Settings:  
PowerNow = Disabled  
Fan Speed Control Modes = Full Speed

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1104-rate-libs-revC/32:/usr/cpu2006/amd1104-rate-libs-revC/64"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AR385 F1  
AMD Opteron 6278

**SPECint\_rate2006 = 510**

**SPECint\_rate\_base2006 = 443**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2012

**Hardware Availability:** Nov-2011

**Software Availability:** Dec-2011

## General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AR385 F1  
AMD Opteron 6278

**SPECint\_rate2006 = 510**

**SPECint\_rate\_base2006 = 443**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2012

**Hardware Availability:** Nov-2011

**Software Availability:** Dec-2011

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
  -IPA:plimit=20000 -OPT:unroll_times_max=8
  -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
  -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
  -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
  -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
  -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
  -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
  -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
  -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
  -INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
  -GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
  -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
  -IPA:min_hotness=300 -IPA:pu_reorder=1
  -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmr: -march=bdver1 -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
  -OPT:alias=disjoint -OPT:unroll_times_max=16
  -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
  -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
  -HP:bdt=2m:heap=2m
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AR385 F1  
AMD Opteron 6278

**SPECint\_rate2006 = 510**

**SPECint\_rate\_base2006 = 443**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2012

**Hardware Availability:** Nov-2011

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

```
458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
           -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
           -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m
           -WOPT:sib=on
```

```
462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll_size=512
                -OPT:unroll_times_max=16 -LNO:prefetch=2
                -LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1
                -CG:p2align=0 -INLINE:aggressive=ON -IPA:plimit=15000
                -IPA:small_pu=100 -HP:bdt=2m:heap=2m,limit=300
```

```
464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
              -OPT:unroll_times_max=2 -IPA:plimit=20000
              -OPT:alias=disjoint -CG:ptr_load_use=0
              -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
```

C++ benchmarks:

471.omnetpp: basepeak = yes

```
473.astar: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
            -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
            -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
            -OPT:alias=disjoint -INLINE:aggressive=on
            -IPA:small_pu=3000 -IPA:plimit=3000 -m32
            -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
                 -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
                 -INLINE:aggressive=on -m32 -CG:cmp_peep=on
                 -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
                 -TENV:frame_pointer=off -fno-emit-exceptions
                 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-acer-platform-rate-revC.html>  
<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-acer-platform-rate-revC.xml>  
<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

Acer AR385 F1  
AMD Opteron 6278

**SPECint\_rate2006 = 510**

**SPECint\_rate\_base2006 = 443**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2012

**Hardware Availability:** Nov-2011

**Software Availability:** Dec-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 10:38:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 July 2012.