



# SPEC<sup>®</sup> CINT2006 Result


Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**  
**Acer AR380 F2 (Xeon E5-2650)**

**SPECint<sup>®</sup>\_rate2006 = 526**  
**SPECint\_rate\_base2006 = 503**

**CPU2006 license:** 97  
**Test sponsor:** Acer Incorporated  
**Tested by:** Acer Incorporated

**Test date:** Jun-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Dec-2011

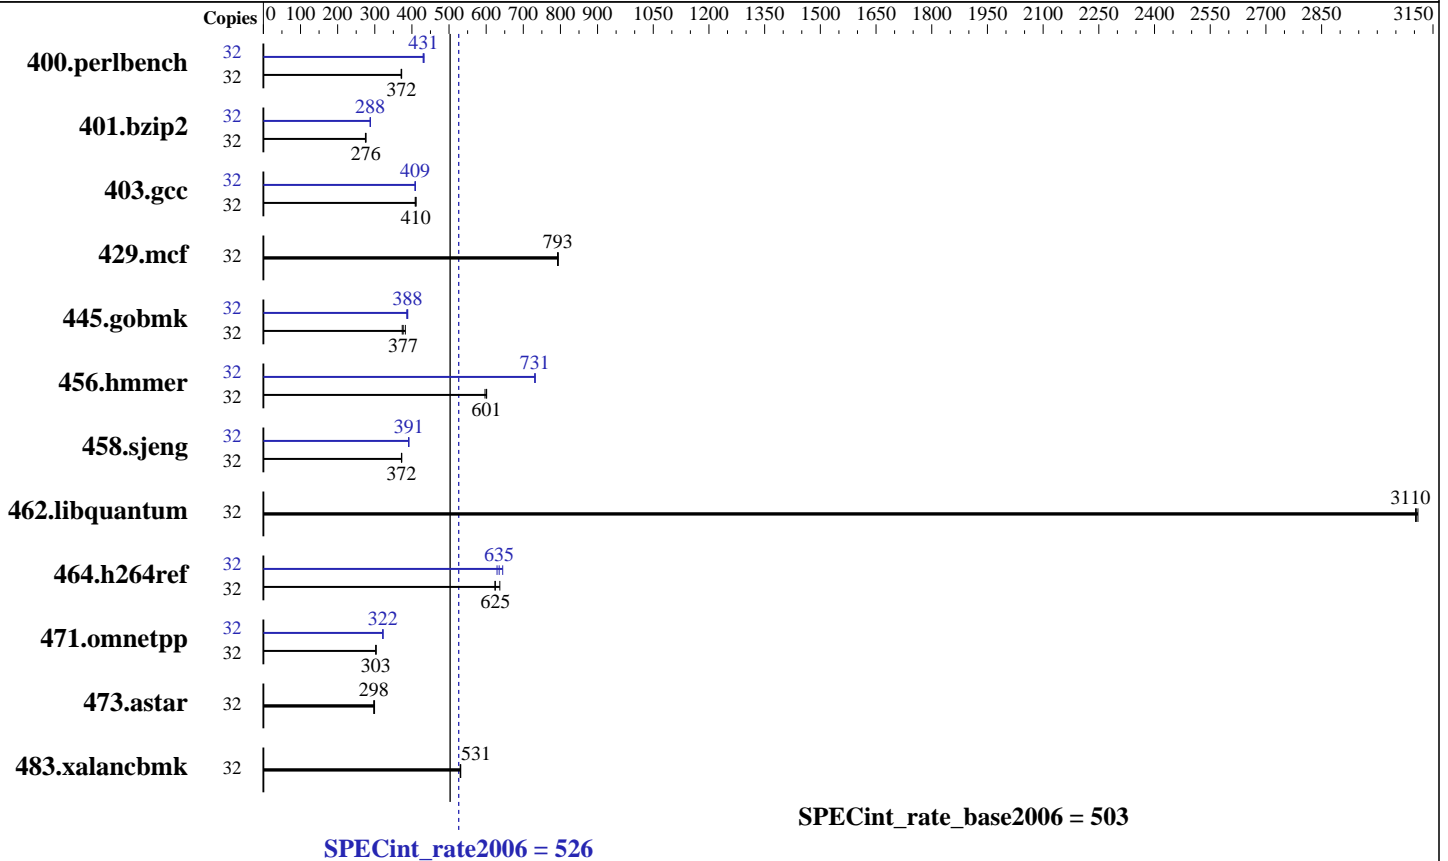

## Hardware

**CPU Name:** Intel Xeon E5-2650  
**CPU Characteristics:** Intel Turbo Boost Technology up to 2.80 GHz  
**CPU MHz:** 2000  
**FPU:** Integrated  
**CPU(s) enabled:** 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
**CPU(s) orderable:** 1,2 chips  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 256 KB I+D on chip per core  
**L3 Cache:** 20 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 128 GB (16 x 8 GB 2Rx4 PC3L-10600R-9, ECC)  
**Disk Subsystem:** 1 x 2 TB SAS, 7200 RPM  
**Other Hardware:** None

## Software

**Operating System:** Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
**Compiler:** C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
**Auto Parallel:** No  
**File System:** ext4  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32-bit  
**Peak Pointers:** 32/64-bit  
**Other Software:** Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 526

Acer AR380 F2 (Xeon E5-2650)

SPECint\_rate\_base2006 = 503

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	839	372	843	371	<b>840</b>	<b>372</b>	32	722	433	<b>726</b>	<b>431</b>	726	430
401.bzip2	32	1124	275	1118	276	<b>1119</b>	<b>276</b>	32	1071	288	<b>1072</b>	<b>288</b>	1073	288
403.gcc	32	626	411	<b>628</b>	<b>410</b>	630	409	32	629	409	630	409	<b>630</b>	<b>409</b>
429.mcf	32	367	794	368	792	<b>368</b>	<b>793</b>	32	367	794	368	792	<b>368</b>	<b>793</b>
445.gobmk	32	878	382	898	374	<b>891</b>	<b>377</b>	32	869	386	863	389	<b>865</b>	<b>388</b>
456.hammer	32	500	597	<b>497</b>	<b>601</b>	496	601	32	408	731	<b>408</b>	<b>731</b>	408	732
458.sjeng	32	1039	373	1041	372	<b>1040</b>	<b>372</b>	32	990	391	988	392	<b>989</b>	<b>391</b>
462.libquantum	32	213	3110	214	3100	<b>214</b>	<b>3110</b>	32	213	3110	214	3100	<b>214</b>	<b>3110</b>
464.h264ref	32	<b>1133</b>	<b>625</b>	1112	637	1136	624	32	1099	645	1125	629	<b>1115</b>	<b>635</b>
471.omnetpp	32	661	303	<b>659</b>	<b>303</b>	659	303	32	621	322	622	322	<b>621</b>	<b>322</b>
473.astar	32	<b>754</b>	<b>298</b>	755	298	750	299	32	<b>754</b>	<b>298</b>	755	298	750	299
483.xalancbmk	32	<b>416</b>	<b>531</b>	417	530	415	532	32	<b>416</b>	<b>531</b>	417	530	415	532

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Wed Jun 6 19:39:25 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 526

Acer AR380 F2 (Xeon E5-2650)

SPECint\_rate\_base2006 = 503

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132129428 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 5 19:03
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
ext4            338G    89G  232G  28% /
```

Additional information from dmidecode:

```
Memory:
14x Hynix Semiconductor HMT31GR7BFR4A-H9 8 GB 1333 MHz 1 rank
2x Hynix Semiconductor HMT31GR7CFR4A-H9 8 GB 1333 MHz 1 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
The Acer AR360 F2 and AR380 F2 are electronically equivalent.
This result was measured on Acer AR380 F2.
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 526

Acer AR380 F2 (Xeon E5-2650)

SPECint\_rate\_base2006 = 503

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 526

Acer AR380 F2 (Xeon E5-2650)

SPECint\_rate\_base2006 = 503

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
 -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
 -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 526

Acer AR380 F2 (Xeon E5-2650)

SPECint\_rate\_base2006 = 503

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 09:43:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 July 2012.