



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp®\_rate2006 = 106**

Express5800/A1020a (Intel Xeon E5-2609)

**SPECfp\_rate\_base2006 = 103**

CPU2006 license: 9006


Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

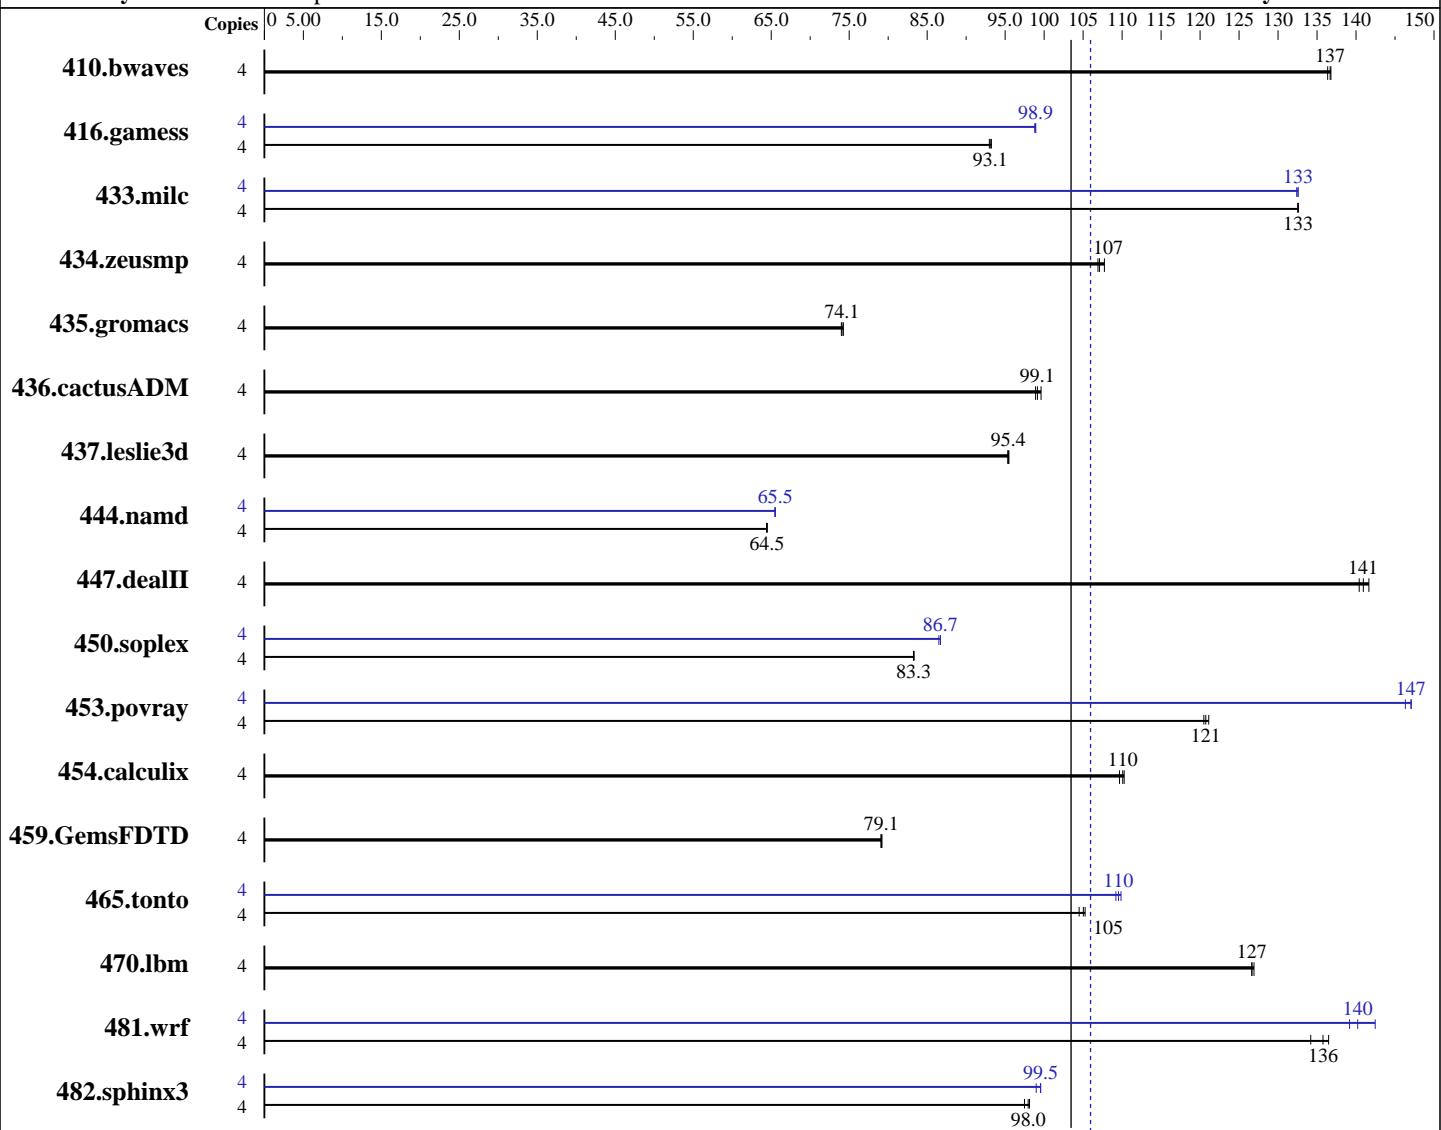

**SPECfp\_rate\_base2006 = 103**

**SPECfp\_rate2006 = 106**

## Hardware

CPU Name: Intel Xeon E5-2609  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 5.7 (Tikanga)  
 Compiler: Kernel 2.6.18-274.el5 on an x86\_64  
 C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/A1020a (Intel Xeon E5-2609)

**SPECfp\_rate2006 = 106**

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 1 x 300 GB SAS, 15000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<b>398</b>	<b>137</b>	397	137	399	136	4	<b>398</b>	<b>137</b>	397	137	399	136
416.gamess	4	840	93.2	<b>841</b>	<b>93.1</b>	842	93.0	4	792	98.9	793	98.8	<b>792</b>	<b>98.9</b>
433.milc	4	277	133	277	133	<b>277</b>	<b>133</b>	4	<b>277</b>	<b>133</b>	277	133	277	132
434.zeusmp	4	<b>340</b>	<b>107</b>	338	108	340	107	4	<b>340</b>	<b>107</b>	338	108	340	107
435.gromacs	4	385	74.3	<b>386</b>	<b>74.1</b>	386	74.0	4	385	74.3	<b>386</b>	<b>74.1</b>	386	74.0
436.cactusADM	4	483	98.9	<b>482</b>	<b>99.1</b>	480	99.6	4	483	98.9	<b>482</b>	<b>99.1</b>	480	99.6
437.leslie3d	4	<b>394</b>	<b>95.4</b>	394	95.5	394	95.3	4	<b>394</b>	<b>95.4</b>	394	95.5	394	95.3
444.namd	4	498	64.4	<b>498</b>	<b>64.5</b>	497	64.5	4	<b>490</b>	<b>65.5</b>	490	65.5	490	65.5
447.dealII	4	326	140	<b>325</b>	<b>141</b>	323	142	4	326	140	<b>325</b>	<b>141</b>	323	142
450.soplex	4	401	83.2	400	83.3	<b>401</b>	<b>83.3</b>	4	385	86.7	<b>385</b>	<b>86.7</b>	386	86.5
453.povray	4	176	121	<b>176</b>	<b>121</b>	177	120	4	<b>145</b>	<b>147</b>	145	147	145	146
454.calculix	4	299	110	301	110	<b>300</b>	<b>110</b>	4	299	110	301	110	<b>300</b>	<b>110</b>
459.GemsFDTD	4	536	79.2	537	79.1	<b>536</b>	<b>79.1</b>	4	536	79.2	537	79.1	<b>536</b>	<b>79.1</b>
465.tonto	4	<b>375</b>	<b>105</b>	374	105	377	104	4	<b>359</b>	<b>110</b>	358	110	360	109
470.lbm	4	433	127	<b>434</b>	<b>127</b>	434	127	4	433	127	<b>434</b>	<b>127</b>	434	127
481.wrf	4	333	134	327	136	<b>329</b>	<b>136</b>	4	314	142	321	139	<b>319</b>	<b>140</b>
482.sphinx3	4	795	98.1	<b>796</b>	<b>98.0</b>	800	97.5	4	783	99.6	<b>783</b>	<b>99.5</b>	788	99.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/A1020a (Intel Xeon E5-2609)

**SPECfp\_rate2006 = 106**

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

```
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 19800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1020a (Intel Xeon E5-2609)

**SPECfp\_rate2006 = 106**

**SPECfp\_rate\_base2006 = 103**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: 

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: 

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: 

```
-DSPEC_CPU_LP64
```

  
416.gamess: 

```
-DSPEC_CPU_LP64
```

  
433.milc: 

```
-DSPEC_CPU_LP64
```

  
434.zeusmp: 

```
-DSPEC_CPU_LP64
```

  
435.gromacs: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
436.cactusADM: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
437.leslie3d: 

```
-DSPEC_CPU_LP64
```

  
444.namd: 

```
-DSPEC_CPU_LP64
```

  
447.dealII: 

```
-DSPEC_CPU_LP64
```

  
453.povray: 

```
-DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A1020a (Intel Xeon E5-2609)

**SPECfp\_rate2006 = 106**

**SPECfp\_rate\_base2006 = 103**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfsl -Wl,-melf\_x86\_64 -Wl,-hugetlbfsl-link=BDT

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 106

Express5800/A1020a (Intel Xeon E5-2609)

SPECfp\_rate\_base2006 = 103

CPU2006 license: 9006

Test date: May-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
           -inline-calloc -opt-malloc-options=3
           -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:51:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 July 2012.