



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5017C-LF (X9SCL-F, Intel Xeon E3-1265LV2)

**SPECint\_rate2006 = 175**

**SPECint\_rate\_base2006 = 167**

CPU2006 license: 001176


**Test date:** Jun-2012

**Test sponsor:** Supermicro

**Hardware Availability:** May-2012

**Tested by:** Supermicro

**Software Availability:** Dec-2011

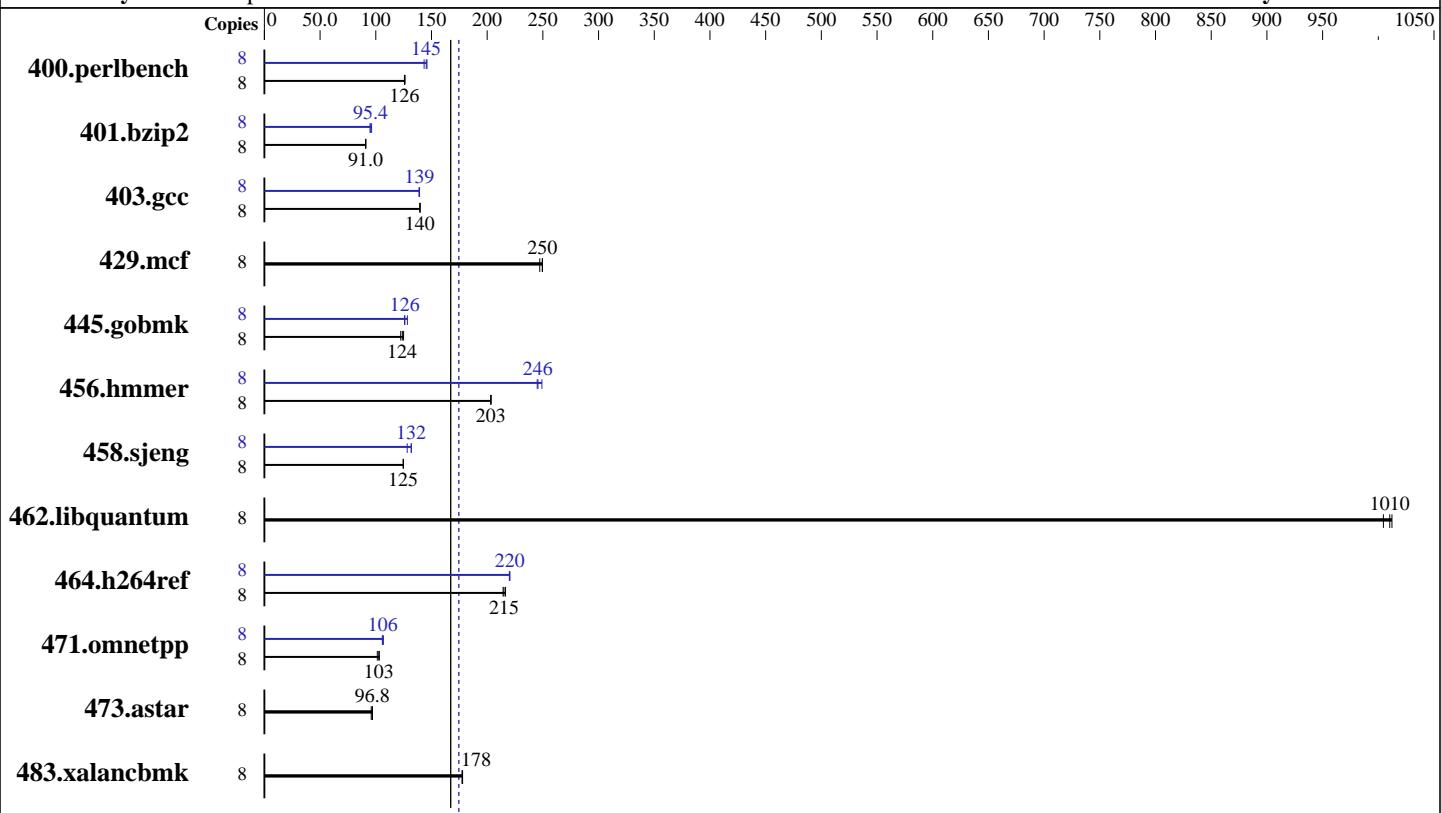

**SPECint\_rate\_base2006 = 167**

**SPECint\_rate2006 = 175**

### Hardware

CPU Name:	Intel Xeon E3-1265L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem:	1 x 500 GB SATA II, 7200 RPM
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago), Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 5017C-LF (X9SCL-F, Intel Xeon E3-1265LV2)

**SPECint\_rate2006 = 175**

**SPECint\_rate\_base2006 = 167**

CPU2006 license: 001176

Test date: Jun-2012

Test sponsor: Supermicro

Hardware Availability: May-2012

Tested by: Supermicro

Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	619	126	<b>621</b>	<b>126</b>	622	126	8	545	143	535	146	<b>538</b>	<b>145</b>
401.bzip2	8	<b>849</b>	<b>91.0</b>	850	90.9	848	91.1	8	<b>809</b>	<b>95.4</b>	802	96.3	814	94.8
403.gcc	8	461	140	461	140	<b>461</b>	<b>140</b>	8	464	139	<b>463</b>	<b>139</b>	462	139
429.mcf	8	<b>292</b>	<b>250</b>	295	247	292	250	8	<b>292</b>	<b>250</b>	295	247	292	250
445.gobmk	8	686	122	672	125	<b>678</b>	<b>124</b>	8	654	128	667	126	<b>665</b>	<b>126</b>
456.hammer	8	367	203	367	203	<b>367</b>	<b>203</b>	8	305	245	<b>304</b>	<b>246</b>	300	249
458.sjeng	8	<b>776</b>	<b>125</b>	776	125	776	125	8	<b>734</b>	<b>132</b>	755	128	734	132
462.libquantum	8	164	1010	<b>164</b>	<b>1010</b>	165	1000	8	164	1010	<b>164</b>	<b>1010</b>	165	1000
464.h264ref	8	<b>823</b>	<b>215</b>	826	214	818	216	8	804	220	<b>804</b>	<b>220</b>	805	220
471.omnetpp	8	<b>487</b>	<b>103</b>	485	103	493	101	8	472	106	468	107	<b>471</b>	<b>106</b>
473.astar	8	<b>580</b>	<b>96.8</b>	579	97.0	585	95.9	8	<b>580</b>	<b>96.8</b>	579	97.0	585	95.9
483.xalancbmk	8	310	178	<b>311</b>	<b>178</b>	311	178	8	310	178	<b>311</b>	<b>178</b>	311	178

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enable

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5017C-LF (X9SCL-F, Intel Xeon E3-1265LV2)

**SPECint\_rate2006 = 175**

**SPECint\_rate\_base2006 = 167**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jun-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5017C-LF (X9SCL-F, Intel Xeon E3-1265LV2)

**SPECint\_rate2006 = 175**

**SPECint\_rate\_base2006 = 167**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jun-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5017C-LF (X9SCL-F, Intel Xeon E3-1265LV2)

**SPECint\_rate2006 = 175**

**SPECint\_rate\_base2006 = 167**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jun-2012

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:51:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 July 2012.