



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 554

PowerEdge T420 (Intel Xeon E5-2450, 2.10 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55


Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

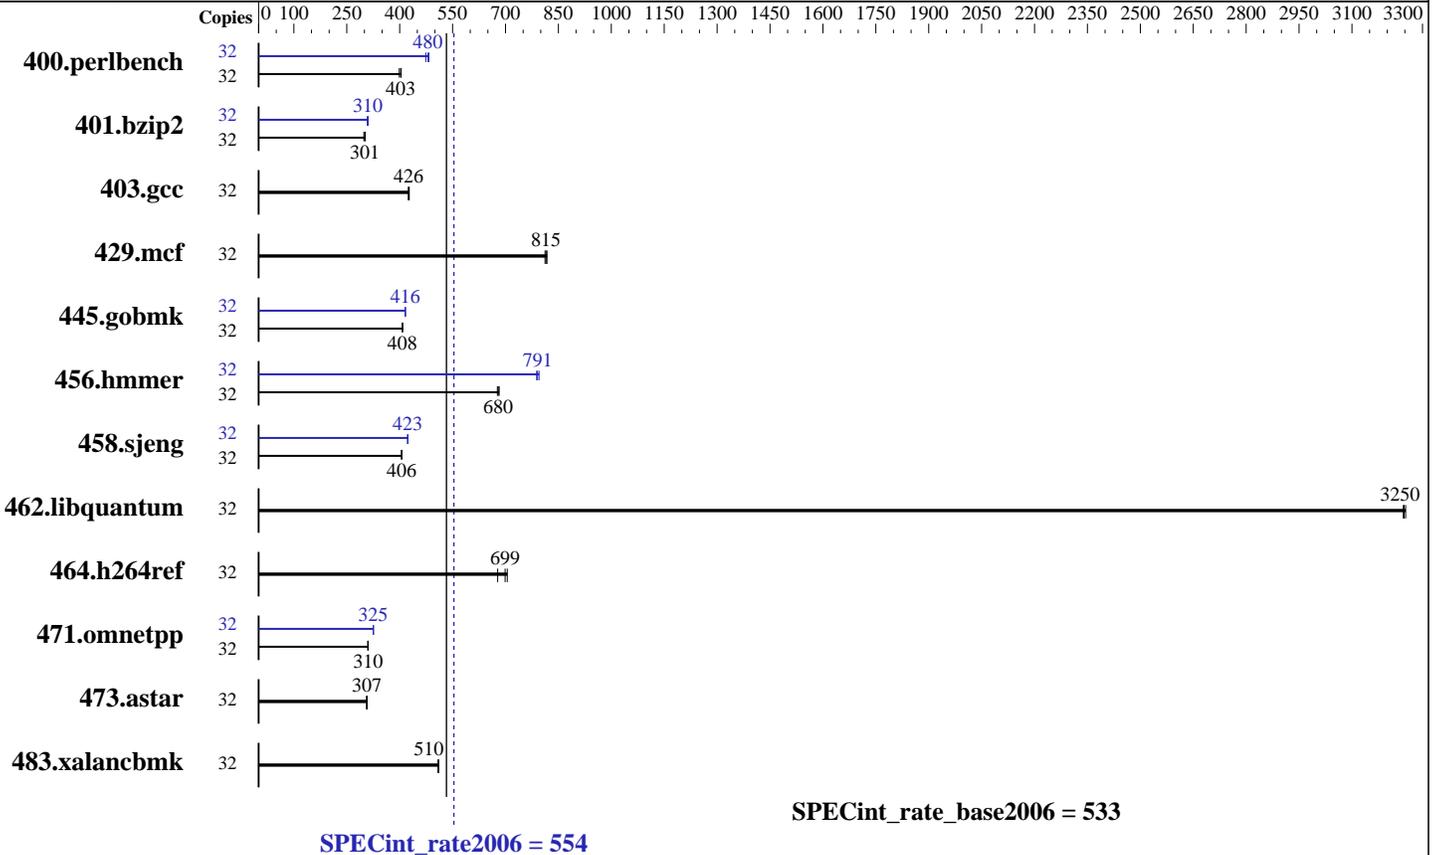

## Hardware

CPU Name: Intel Xeon E5-2450  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP2(x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 554

PowerEdge T420 (Intel Xeon E5-2450, 2.10 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: May-2012  
Hardware Availability: Jun-2012  
Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	774	404	784	399	<b>776</b>	<b>403</b>	32	659	474	647	483	<b>651</b>	<b>480</b>
401.bzip2	32	1021	302	1035	298	<b>1026</b>	<b>301</b>	32	1002	308	<b>996</b>	<b>310</b>	995	310
403.gcc	32	<b>605</b>	<b>426</b>	603	427	607	424	32	<b>605</b>	<b>426</b>	603	427	607	424
429.mcf	32	359	812	<b>358</b>	<b>815</b>	357	818	32	359	812	<b>358</b>	<b>815</b>	357	818
445.gobmk	32	<b>823</b>	<b>408</b>	824	407	822	409	32	806	416	<b>807</b>	<b>416</b>	808	416
456.hammer	32	441	677	438	682	<b>439</b>	<b>680</b>	32	<b>377</b>	<b>791</b>	375	795	379	788
458.sjeng	32	954	406	956	405	<b>955</b>	<b>406</b>	32	915	423	<b>915</b>	<b>423</b>	917	422
462.libquantum	32	204	3250	<b>204</b>	<b>3250</b>	204	3250	32	204	3250	<b>204</b>	<b>3250</b>	204	3250
464.h264ref	32	<b>1013</b>	<b>699</b>	1004	705	1045	678	32	<b>1013</b>	<b>699</b>	1004	705	1045	678
471.omnetpp	32	645	310	645	310	<b>645</b>	<b>310</b>	32	614	326	<b>615</b>	<b>325</b>	615	325
473.astar	32	<b>732</b>	<b>307</b>	734	306	731	307	32	<b>732</b>	<b>307</b>	734	306	731	307
483.xalancbmk	32	432	511	434	509	<b>433</b>	<b>510</b>	32	432	511	434	509	<b>433</b>	<b>510</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost set to Enabled  
C States/C1E set to Enabled  
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on linux-316h Fri May 18 11:36:20 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2450 0 @ 2.10GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 554

PowerEdge T420 (Intel Xeon E5-2450, 2.10 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      98994188 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

uname -a:

```
Linux linux-316h 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 18 11:29 last=S

SPEC is set to: /root/CPU2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  271G   73G  185G  29% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 554

PowerEdge T420 (Intel Xeon E5-2450, 2.10 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: May-2012  
Hardware Availability: Jun-2012  
Software Availability: Feb-2012

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 554

PowerEdge T420 (Intel Xeon E5-2450, 2.10 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55

Test date: May-2012

Test sponsor: Dell Inc.

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 554

PowerEdge T420 (Intel Xeon E5-2450, 2.10 GHz)

SPECint\_rate\_base2006 = 533

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 12:25:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 July 2012.