



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

SPECint®\_rate2006 = 705

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECint\_rate\_base2006 = 630

CPU2006 license: 6


Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

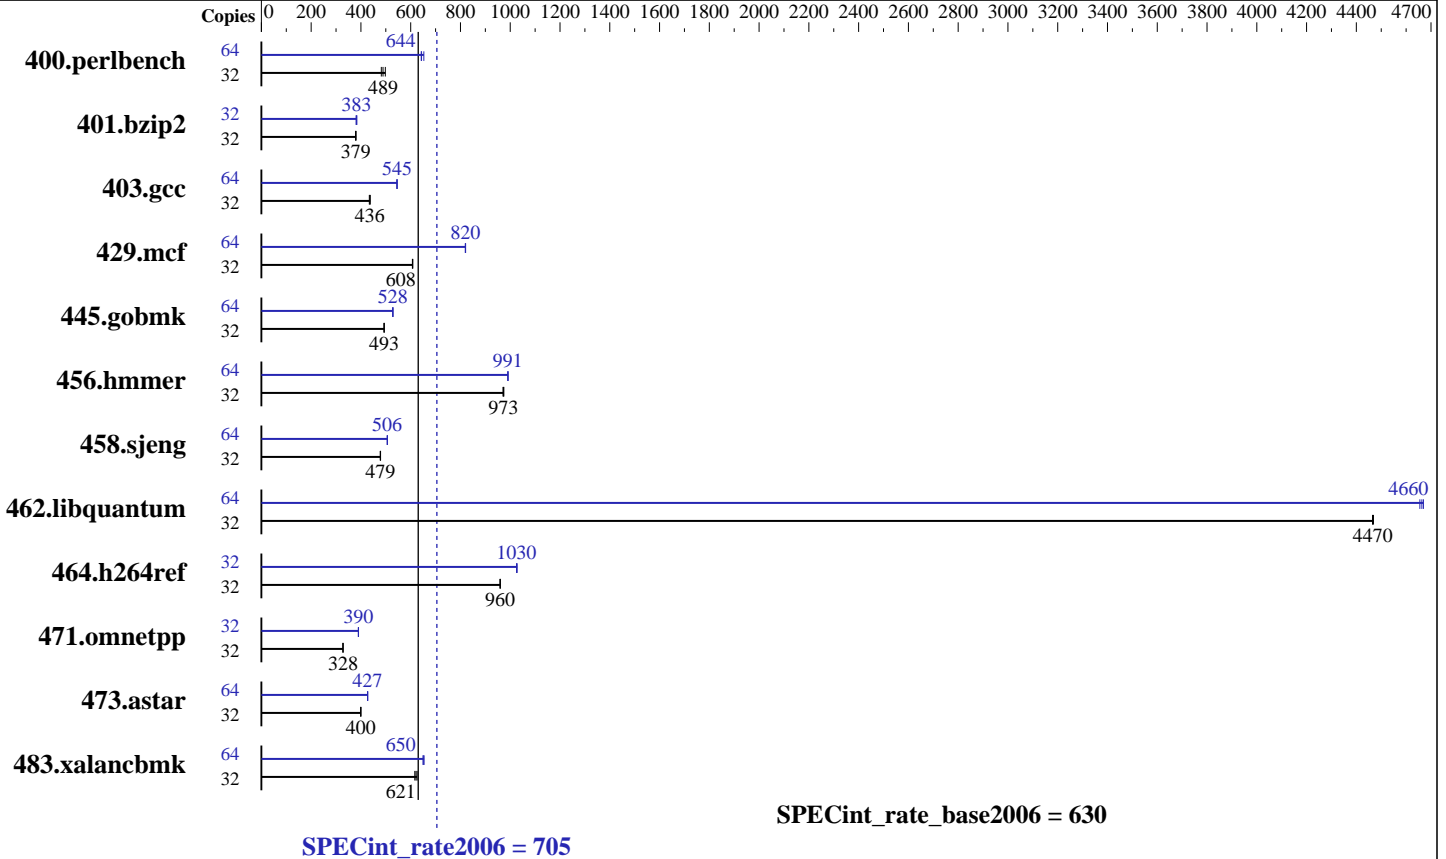

### Hardware

CPU Name: Intel Xeon E5-2690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 or 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 600 GB 10K RPM SAS  
 Other Hardware: None

### Software

Operating System: Oracle Solaris 11 11/11 (SRU 03)  
 Compiler: C/C++: Version 12.3 of Oracle Solaris Studio (patch update 1, tested with nightly build 20120313)  
 Auto Parallel: No  
 File System: zfs  
 System State: Default  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 705

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECint\_rate\_base2006 = 630

CPU2006 license: 6

Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	32	649	482	628	498	<b>640</b>	<b>489</b>	64	973	642	958	653	<b>972</b>	<b>644</b>		
401.bzip2	32	<b>815</b>	<b>379</b>	812	380	816	379	32	<b>807</b>	<b>383</b>	805	383	812	380		
403.gcc	32	594	434	589	437	<b>591</b>	<b>436</b>	64	<b>945</b>	<b>545</b>	944	546	946	544		
429.mcf	32	480	609	<b>480</b>	<b>608</b>	481	607	64	<b>711</b>	<b>820</b>	712	819	711	821		
445.gobmk	32	<b>680</b>	<b>493</b>	680	493	681	493	64	<b>1271</b>	<b>528</b>	1272	528	1270	529		
456.hammer	32	306	974	308	971	<b>307</b>	<b>973</b>	64	602	991	<b>603</b>	<b>991</b>	603	990		
458.sjeng	32	808	479	<b>809</b>	<b>479</b>	811	478	64	1531	506	<b>1530</b>	<b>506</b>	1530	506		
462.libquantum	32	<b>148</b>	<b>4470</b>	148	4460	148	4470	64	285	4660	284	4670	<b>284</b>	<b>4660</b>		
464.h264ref	32	738	960	<b>738</b>	<b>960</b>	738	959	32	689	1030	<b>690</b>	<b>1030</b>	691	1030		
471.omnetpp	32	610	328	610	328	<b>610</b>	<b>328</b>	32	<b>513</b>	<b>390</b>	512	390	513	390		
473.astar	32	563	399	562	400	<b>562</b>	<b>400</b>	64	1053	427	1051	427	<b>1052</b>	<b>427</b>		
483.xalancbmk	32	358	616	353	626	<b>355</b>	<b>621</b>	64	675	654	679	650	<b>679</b>	<b>650</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used to bind processes to CPU threads with pbind(1)

## Operating System Notes

ulimit -s 10000 (shell): increases stack

```

/etc/system parameters
  autoup=1000
  zfs:zfs_arc_max=0x400000000
  zfs:zfs_arc_min=0x400000000
  ncsiz=0x10000
  lpg_alloc_prefer=1

```

gzip compression set using "zfs set compression=gzip <zfs-filesystem>"

## Platform Notes

Default BIOS Settings were used, except:  
Energy Performance set to Performance

Oracle's Sun Server X3-2L was formerly known as the Sun Fire X4270 M3

Single processor configuration of this system is available as of Sep-2012

```

Sysinfo program /export/home/gnana/cpu2006v1.2/Docs/sysinfo
: 6775 2011-08-16 #f7622badcf24e01c368b1db4377c
running on bur398-107 Thu Apr 5 13:43:53 2012

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 705

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECint\_rate\_base2006 = 630

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Apr-2012

Hardware Availability: Apr-2012

Software Availability: Jun-2012

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /usr/sbin/psrinfo -pv
Intel(r) Xeon(r) CPU E5-2690 0 @ 2.90GHz
x86 (GenuineIntel 206D7 family 6 model 45 step 7 clock 2900 MHz)
```

```
/usr/sbin/psrinfo -p: 2 chips
/usr/sbin/psrinfo -pv | grep "core has" | wc -l: 16 cores
/usr/sbin/psrinfo | wc -l: 32 threads
```

```
/usr/sbin/prtconf | grep "Memory size:": 131062 Megabytes
```

```
/etc/release:
Oracle Solaris 11 11/11 X86
```

```
uname -a:
SunOS bur398-107 5.11 11.0 i86pc i386 i86pc
```

```
disk: df -h
Filesystem      Size  Used  Available Capacity  Mounted on
rpool/export/home 547G  3.4G      94G      4%  /export/home
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
OMP\_NUM\_THREADS = "1"

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_SOLARIS_X64 -DSPEC_CPU_LP64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_SOLARIS -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 705

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECint\_rate\_base2006 = 630

CPU2006 license: 6

Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

## Base Portability Flags (Continued)

429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_SOLARIS -DSPEC\_CPU\_LP64  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Base Optimization Flags

C benchmarks:

-g -fast -xipo=2 -m64 -xaddr32 -xpagesize=2M -xalias\_level=std

C++ benchmarks:

-fast -xipo=2 -m32 -xpagesize=2M -xalias\_level=compatible  
-library=stlport4 -lfast

## Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_X64 -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_SOLARIS  
 462.libquantum: -DSPEC\_CPU\_SOLARIS  
 483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Peak Optimization Flags

C benchmarks:

400.perlbench: -g -xprofile=collect:./feedback(pass 1)  
 -xprofile=use:./feedback(pass 2) -fast -xprefetch=no%auto  
 -xtarget=nehalem -xipo=1 -m64 -xpagesize=2M  
 -xalias\_level=std -lbsdmalloc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 705

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECint\_rate\_base2006 = 630

CPU2006 license: 6

Test date: Apr-2012

Test sponsor: Oracle Corporation

Hardware Availability: Apr-2012

Tested by: Oracle Corporation

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

401.bzip2: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=2M -xalias\_level=strong

403.gcc: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32  
-xpagesize=2M -xalias\_level=std  
-W2,-Abuiltin\_opt:calloc\_no\_support=on

429.mcf: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32  
-xpagesize\_heap=2M -xpagesize\_stack=4k -xalias\_level=std

445.gobmk: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -m64 -xpagesize=2M  
-xrestrict -xalias\_level=strong

456.hmmer: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=4k -xalias\_level=strong

458.sjeng: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=2 -m64 -xpagesize=2M -xalias\_level=std

462.libquantum: -g -fast -xtarget=nehalem -xipo=2 -m64 -xpagesize=2M  
-xalias\_level=std -xunroll=8

464.h264ref: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32  
-xpagesize=2M -xalias\_level=strong

### C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2  
-xpagesize=2M -xalias\_level=compatible -library=stlport4  
-L/export/home/gnana/cpu2006v1.2/SmartHeap\_9/lib/ -R/export/home/gnana/cpu2006v1.2/SmartHeap\_9/lib/ -lsm

473.astar: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64  
-xpagesize=2M -xalias\_level=compatible -xrestrict  
-library=stlport4 -lfast

483.xalancbmk: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2  
-xpagesize=2M -xunroll=8 -library=stlport4 -lfast



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 705

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECint\_rate\_base2006 = 630

**CPU2006 license:** 6

**Test sponsor:** Oracle Corporation

**Tested by:** Oracle Corporation

**Test date:** Apr-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Jun-2012

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86\\_64.html](http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.html)

[http://www.spec.org/cpu2006/flags/Oracle-platform-x86\\_64.CPUv1.2-RevA.20120425.html](http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86\\_64.xml](http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.xml)

[http://www.spec.org/cpu2006/flags/Oracle-platform-x86\\_64.CPUv1.2-RevA.20120425.xml](http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:51:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 July 2012.