



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp<sup>®</sup>\_rate2006 = 129

IBM System x3250 M4 (Intel Xeon E3-1265L v2)

SPECfp\_rate\_base2006 = 125

CPU2006 license: 11


Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

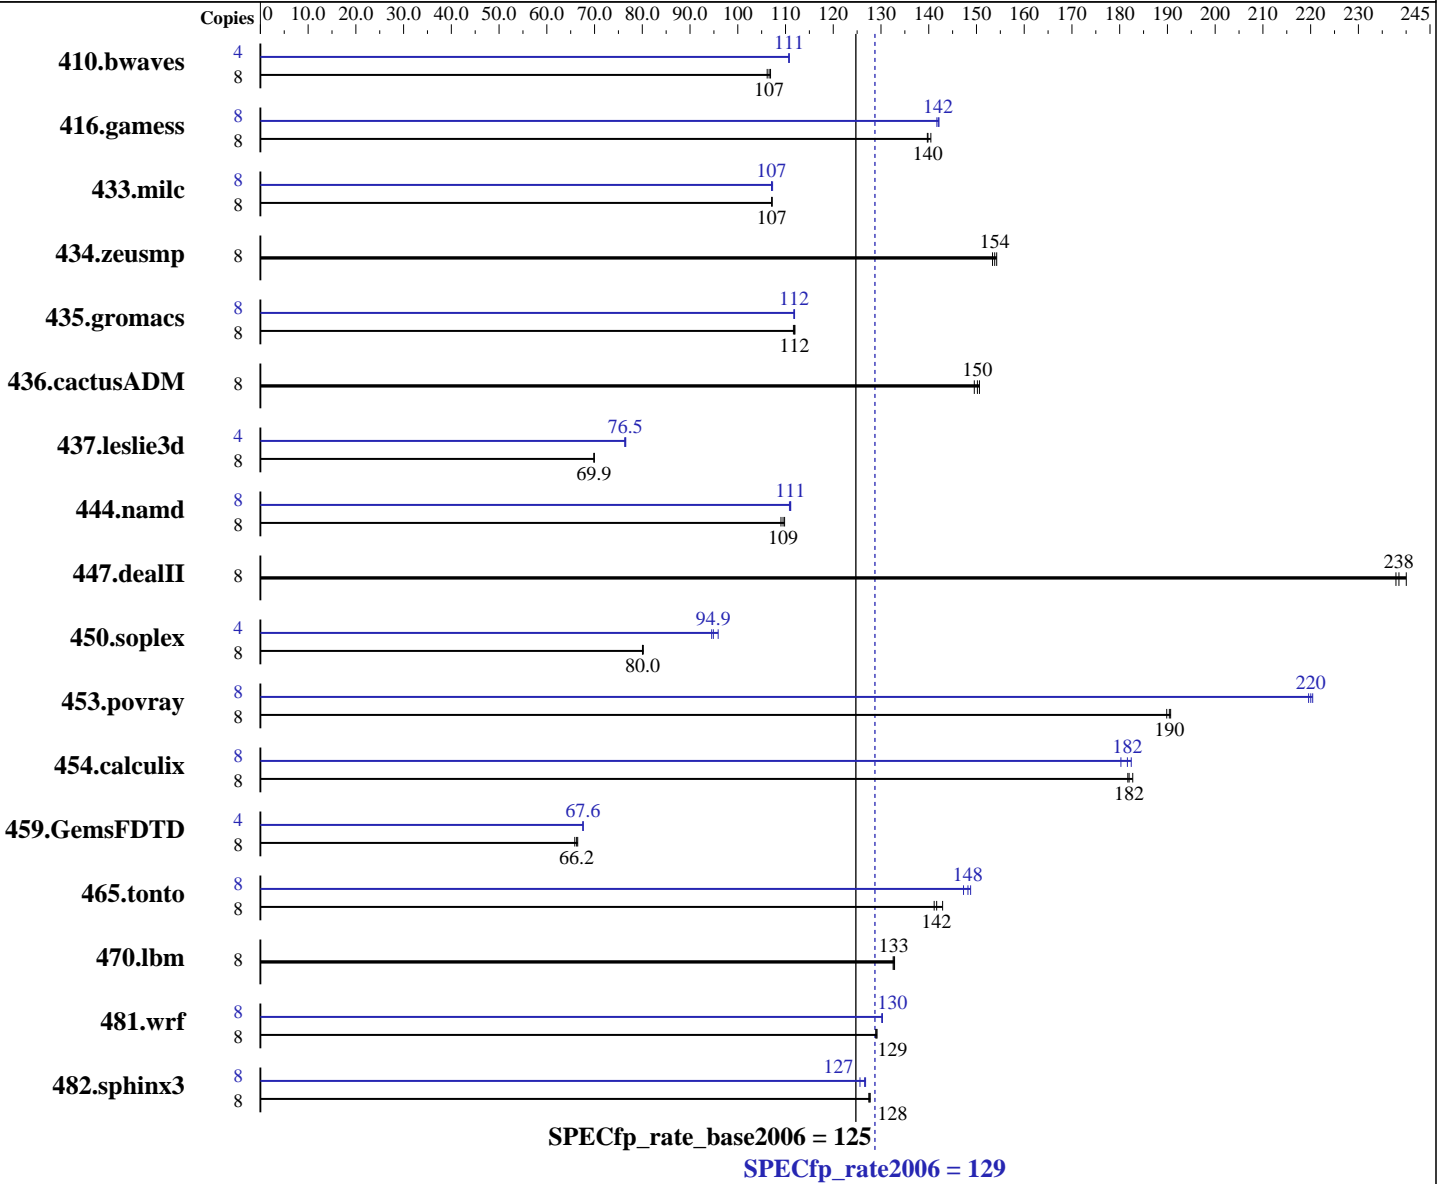

### Hardware

CPU Name: Intel Xeon E3-1265L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp\_rate2006 = **129**

IBM System x3250 M4 (Intel Xeon E3-1265L v2)

SPECfp\_rate\_base2006 = **125**

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1024	106	<b><u>1020</u></b>	<b><u>107</u></b>	1017	107	4	491	111	491	111	<b><u>491</u></b>	<b><u>111</u></b>
416.gamess	8	1121	140	<b><u>1120</u></b>	<b><u>140</u></b>	1115	140	8	1102	142	1105	142	<b><u>1103</u></b>	<b><u>142</u></b>
433.milc	8	<b><u>685</u></b>	<b><u>107</u></b>	686	107	685	107	8	684	107	<b><u>686</u></b>	<b><u>107</u></b>	686	107
434.zeusmp	8	472	154	475	153	<b><u>473</u></b>	<b><u>154</u></b>	8	472	154	475	153	<b><u>473</u></b>	<b><u>154</u></b>
435.gromacs	8	512	112	510	112	<b><u>510</u></b>	<b><u>112</u></b>	8	<b><u>511</u></b>	<b><u>112</u></b>	511	112	510	112
436.cactusADM	8	635	151	<b><u>637</u></b>	<b><u>150</u></b>	639	150	8	635	151	<b><u>637</u></b>	<b><u>150</u></b>	639	150
437.leslie3d	8	1075	69.9	<b><u>1076</u></b>	<b><u>69.9</u></b>	1076	69.9	4	491	76.5	<b><u>492</u></b>	<b><u>76.5</u></b>	493	76.3
444.namd	8	588	109	<b><u>586</u></b>	<b><u>109</u></b>	584	110	8	<b><u>578</u></b>	<b><u>111</u></b>	579	111	578	111
447.dealII	8	<b><u>384</u></b>	<b><u>238</u></b>	381	240	385	238	8	<b><u>384</u></b>	<b><u>238</u></b>	381	240	385	238
450.soplex	8	832	80.2	834	80.0	<b><u>834</u></b>	<b><u>80.0</u></b>	4	<b><u>352</u></b>	<b><u>94.9</u></b>	353	94.5	348	95.9
453.povray	8	<b><u>224</u></b>	<b><u>190</u></b>	224	190	223	191	8	<b><u>193</u></b>	<b><u>220</u></b>	193	220	194	220
454.calculix	8	<b><u>363</u></b>	<b><u>182</u></b>	363	182	361	183	8	<b><u>363</u></b>	<b><u>182</u></b>	366	180	362	182
459.GemsFDTD	8	1289	65.9	<b><u>1281</u></b>	<b><u>66.2</u></b>	1277	66.5	4	628	67.6	628	67.6	<b><u>628</u></b>	<b><u>67.6</u></b>
465.tonto	8	558	141	<b><u>556</u></b>	<b><u>142</u></b>	551	143	8	529	149	<b><u>531</u></b>	<b><u>148</u></b>	534	147
470.lbm	8	829	133	827	133	<b><u>828</u></b>	<b><u>133</u></b>	8	829	133	827	133	<b><u>828</u></b>	<b><u>133</u></b>
481.wrf	8	693	129	<b><u>692</u></b>	<b><u>129</u></b>	692	129	8	<b><u>686</u></b>	<b><u>130</u></b>	686	130	686	130
482.sphinx3	8	<b><u>1222</u></b>	<b><u>128</u></b>	1221	128	1223	127	8	1241	126	<b><u>1232</u></b>	<b><u>127</u></b>	1230	127

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Turbo Mode enabled in BIOS  
C-State enabled in BIOS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 129

IBM System x3250 M4 (Intel Xeon E3-1265L v2)

SPECfp\_rate\_base2006 = 125

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Platform Notes (Continued)

Sysinfo program /root/SPECcpul.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Fri Jul 13 23:15:11 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E3-1265L V2 @ 2.50GHz
    1 "physical id"s (chips)
    8 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 4
    siblings  : 8
    physical 0: cores 0 1 2 3
  cache size : 8192 KB
```

```
From /proc/meminfo
  MemTotal:      16322724 kB
  HugePages_Total:      0
  Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
  Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
  EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 13 12:20
```

```
SPEC is set to: /root/SPECcpul.2
  Filesystem      Type      Size  Used Avail Use% Mounted on
  /dev/mapper/VolGroup-lv_root
    ext4          50G    19G   29G  40% /
```

Additional information from dmidecode:

```
Memory:
  2x Micron 18JSF1G72AZ-1G6D1 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 129

IBM System x3250 M4 (Intel Xeon E3-1265L v2)

SPECfp\_rate\_base2006 = 125

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/SPECcpul.2/libs/32:/root/SPECcpul.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 129

IBM System x3250 M4 (Intel Xeon E3-1265L v2)

SPECfp\_rate\_base2006 = 125

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 129

IBM System x3250 M4 (Intel Xeon E3-1265L v2)

SPECfp\_rate\_base2006 = 125

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 129

IBM System x3250 M4 (Intel Xeon E3-1265L v2)

SPECfp\_rate\_base2006 = 125

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:47:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.