



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 30.6

PowerEdge R715 (AMD Opteron 6220, 3.00 GHz)

SPECint\_base2006 = 25.3

CPU2006 license: 55


Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

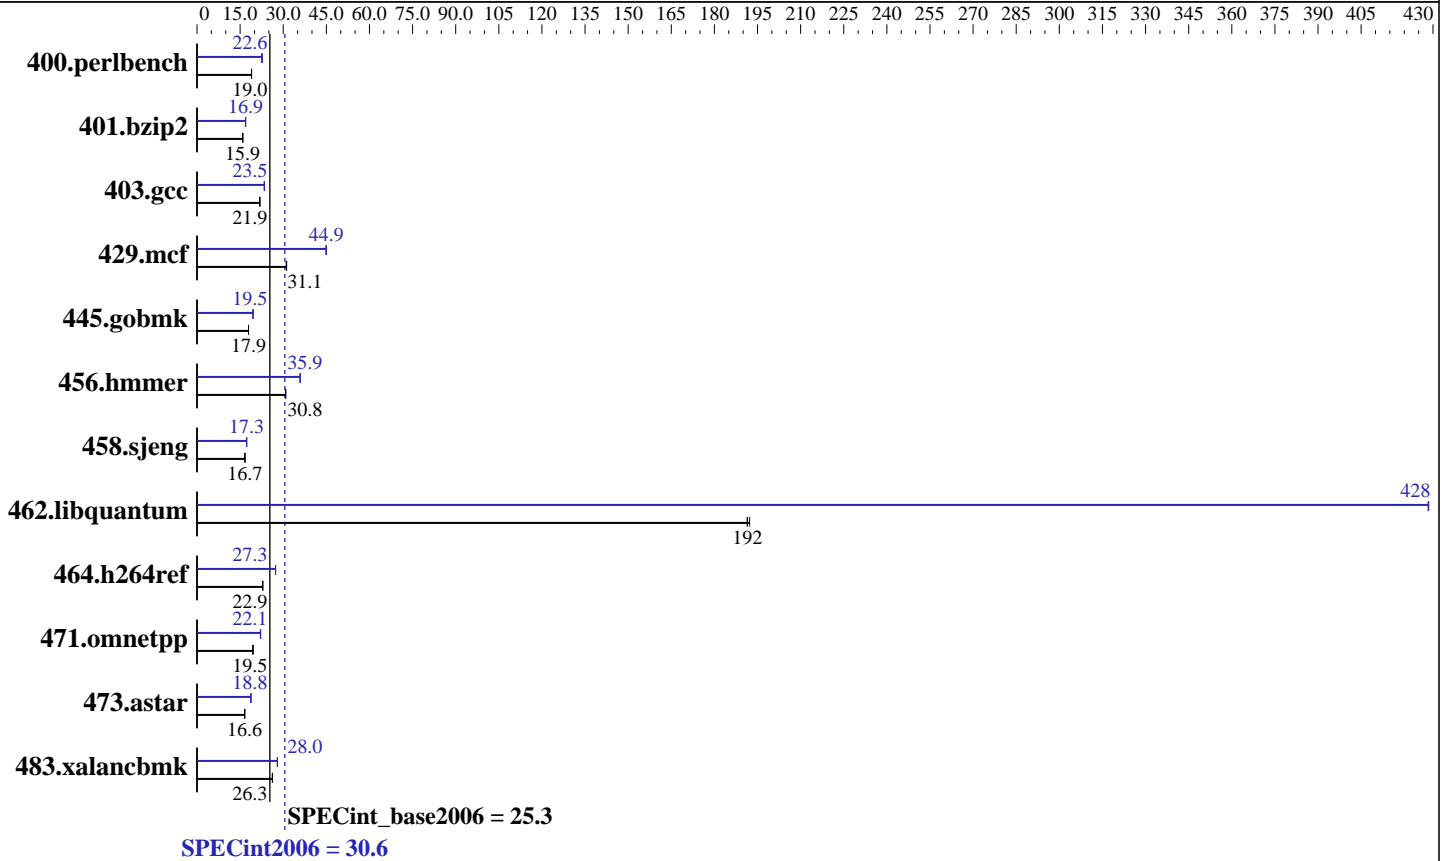

**Hardware**

CPU Name: AMD Opteron 6220  
 CPU Characteristics: AMD Turbo CORE technology up to 3.60 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 256 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 4 cores  
 Other Cache: None  
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 3 x 146 GB SAS, 15000 RPM  
 Other Hardware: None

**Software**

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 30.6

PowerEdge R715 (AMD Opteron 6220, 3.00 GHz)

SPECint\_base2006 = 25.3

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Jul-2012  
Hardware Availability: Nov-2011  
Software Availability: Jul-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	514	19.0	<u>515</u>	<u>19.0</u>	516	18.9	430	22.7	434	22.5	<u>432</u>	<u>22.6</u>
401.bzip2	<u>606</u>	<u>15.9</u>	606	15.9	606	15.9	571	16.9	570	16.9	<u>571</u>	<u>16.9</u>
403.gcc	368	21.9	369	21.8	<u>368</u>	<u>21.9</u>	344	23.4	343	23.5	<u>343</u>	<u>23.5</u>
429.mcf	292	31.2	<u>293</u>	<u>31.1</u>	294	31.1	203	44.9	<u>203</u>	<u>44.9</u>	203	45.0
445.gobmk	586	17.9	<u>585</u>	<u>17.9</u>	585	17.9	538	19.5	538	19.5	<u>538</u>	<u>19.5</u>
456.hammer	303	30.8	302	30.9	<u>303</u>	<u>30.8</u>	260	35.8	<u>260</u>	<u>35.9</u>	260	35.9
458.sjeng	<u>726</u>	<u>16.7</u>	727	16.7	726	16.7	701	17.3	<u>701</u>	<u>17.3</u>	700	17.3
462.libquantum	<u>108</u>	<u>192</u>	108	192	108	191	<u>48.4</u>	<u>428</u>	48.4	429	48.4	428
464.h264ref	<u>966</u>	<u>22.9</u>	966	22.9	972	22.8	810	27.3	<u>810</u>	<u>27.3</u>	809	27.3
471.omnetpp	320	19.5	<u>321</u>	<u>19.5</u>	323	19.4	283	22.0	<u>283</u>	<u>22.1</u>	282	22.1
473.astar	<u>423</u>	<u>16.6</u>	423	16.6	423	16.6	375	18.7	374	18.8	<u>374</u>	<u>18.8</u>
483.xalancbmk	263	26.2	263	26.3	<u>263</u>	<u>26.3</u>	<u>247</u>	<u>28.0</u>	247	28.0	247	27.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf  
cpuspeed stop was used to set the CPU frequency to its maximum.

Set vm/nr\_hugepages=4000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "4000"
LD_LIBRARY_PATH = "/root/cpu2006/amd1104-speed-libs-revA/32:/root/cpu2006/amd1104-speed-libs-revA/64"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15"
O64_OMP_SPIN_COUNT = "800000"
O64_OMP_SPIN_USER_LOCK = "true"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 30.6

PowerEdge R715 (AMD Opteron 6220, 3.00 GHz)

SPECint\_base2006 = 25.3

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

## General Notes (Continued)

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -CG:p2align=0  
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m -LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 30.6

PowerEdge R715 (AMD Opteron 6220, 3.00 GHz)

SPECint\_base2006 = 25.3

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
 -IPA:plimit=20000 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
 -CG:load\_exe=0 -CG:unroll\_fb\_req=on -CG:movext\_icmp=off  
 -HP:bdt=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
 -OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
 -HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
 -INLINE:aggressive=on -CG:gcm=off  
 -GRA:prioritize\_by\_density=on -m32 -HP:bdt=2m:heap=2m

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1  
 -LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bdt=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=16  
 -OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
 -HP:bdt=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 30.6

PowerEdge R715 (AMD Opteron 6220, 3.00 GHz)

SPECint\_base2006 = 25.3

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
 -CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
 -CG:p2align=1 -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
 -HP:bdt=2m:heap=2m -WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -OPT:unroll\_size=512  
 -OPT:unroll\_times\_max=8 -LNO:prefetch=2 -LNO:pf2=0  
 -CG:local\_sched\_alg=1 -INLINE:aggressive=on  
 -IPA:plimit=8000 -IPA:small\_pu=100  
 -HP:bdt=2m:heap=2m,limit=450 -apo

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=2 -IPA:plimit=20000  
 -OPT:alias=disjoint -CG:ptr\_load\_use=0  
 -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=bdver1 -Ofast -D\_\_OPEN64\_FAST\_SET -CG:gcm=off  
 -INLINE:aggressive=on -WOPT:if\_conv=0 -WOPT:sib=on -m32  
 -HP:bdt=2m:heap=2m

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
 -WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
 -CG:p2align=0 -GRA:optimize\_boundary=on -OPT:alias=disjoint  
 -INLINE:aggressive=on -IPA:small\_pu=3000 -IPA:plimit=3000  
 -m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
 -OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
 -INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
 -CG:local\_sched=off -CG:p2align=0 -GRA:unspill=on  
 -TENV:frame\_pointer=off -fno-emit-exceptions  
 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA-I.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 30.6

PowerEdge R715 (AMD Opteron 6220, 3.00 GHz)

SPECint\_base2006 = 25.3

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:37:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 July 2012.