



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 224

PowerEdge R415 (AMD Opteron 4230 HE, 2.90 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55


Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

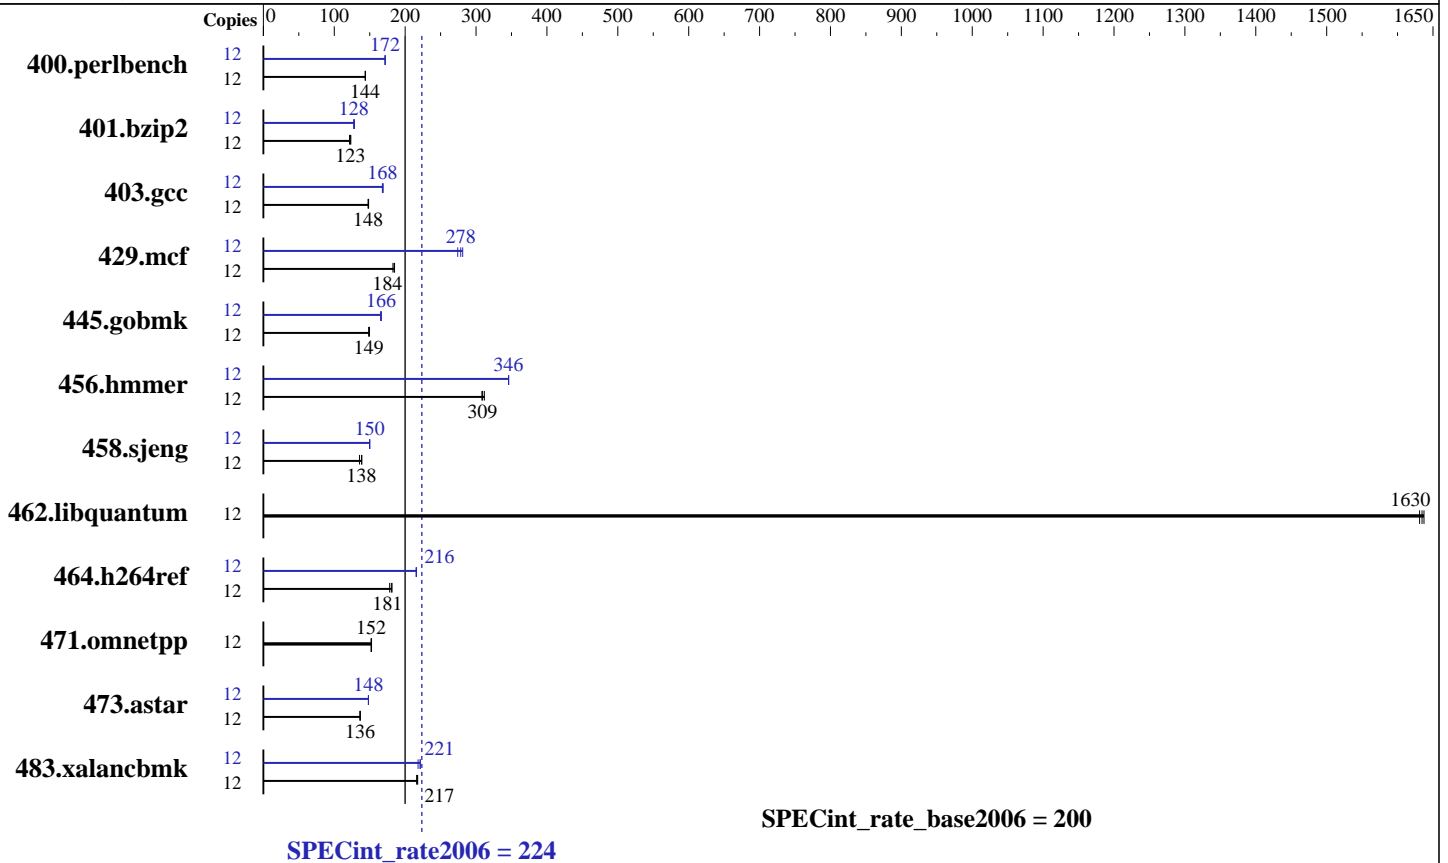

SPECint_rate2006 = 224

SPECint_rate_base2006 = 200

Hardware

CPU Name: AMD Opteron 4230 HE
 CPU Characteristics: AMD Turbo CORE technology up to 3.70 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 192 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64)
 3.0.13-0.27-default
 Compiler: C/C++: Version 4.5.1 of x86 Open64 Compiler Suite
 (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 224

PowerEdge R415 (AMD Opteron 4230 HE, 2.90 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2012
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	815	144	815	144	815	144	12	683	172	682	172	682	172
401.bzip2	12	944	123	939	123	953	122	12	907	128	901	128	908	128
403.gcc	12	651	148	653	148	654	148	12	575	168	574	168	572	169
429.mcf	12	599	183	591	185	593	184	12	389	281	393	278	399	274
445.gobmk	12	841	150	846	149	846	149	12	757	166	761	165	758	166
456.hammer	12	363	308	359	312	362	309	12	324	346	324	346	324	346
458.sjeng	12	1071	136	1049	138	1045	139	12	968	150	970	150	968	150
462.libquantum	12	152	1630	152	1630	152	1640	12	152	1630	152	1630	152	1640
464.h264ref	12	1463	182	1491	178	1471	181	12	1231	216	1230	216	1231	216
471.omnetpp	12	492	153	493	152	493	152	12	492	153	493	152	493	152
473.astar	12	617	136	616	137	618	136	12	568	148	568	148	569	148
483.xalancbmk	12	380	218	383	216	381	217	12	374	221	375	221	379	218

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006/amd1104-rate-libs-revC/32:/root/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 224

PowerEdge R415 (AMD Opteron 4230 HE, 2.90 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2012
Hardware Availability: Nov-2011
Software Availability: Jul-2011

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 224

PowerEdge R415 (AMD Opteron 4230 HE, 2.90 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
 -IPA:plimit=20000 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
 -WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
 -CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
 -OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
 -CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
 -INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
 -GRA:prioritize_by_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
 -OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
 -IPA:min_hotness=300 -IPA:pu_reorder=1
 -LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
 -OPT:alias=disjoint -OPT:unroll_times_max=16
 -OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
 -CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
 -HP:bd=2m:heap=2m

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 224

PowerEdge R415 (AMD Opteron 4230 HE, 2.90 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55

Test date: Jul-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2011

Tested by: Dell Inc.

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

```
458.sjeng: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -CG:ptr_load_use=0
          -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on
          -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m
          -WOPT:sib=on
```

462.libquantum: basepeak = yes

```
464.h264ref: -march=bdver1 -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:unroll_size=256
            -OPT:unroll_times_max=2 -IPA:plimit=20000
            -OPT:alias=disjoint -CG:ptr_load_use=0
            -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
```

C++ benchmarks:

471.omnetpp: basepeak = yes

```
473.astar: -march=bdver1 -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
          -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
          -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
          -OPT:alias=disjoint -INLINE:aggressive=on
          -IPA:small_pu=3000 -IPA:plimit=3000 -m32
          -HP:bd=2m:heap=2m
```

```
483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
              -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
              -INLINE:aggressive=on -m32 -CG:cmp_peep=on
              -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
              -TENV:frame_pointer=off -fno-emit-exceptions
              -L/root/work/libraries/SmartHeap-10/lib -lsmarheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>
<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>
<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 224

PowerEdge R415 (AMD Opteron 4230 HE, 2.90 GHz)

SPECint_rate_base2006 = 200

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2012

Hardware Availability: Nov-2011

Software Availability: Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:33:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 July 2012.