



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®\_rate2006 = 414

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 379

CPU2006 license: 55


Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

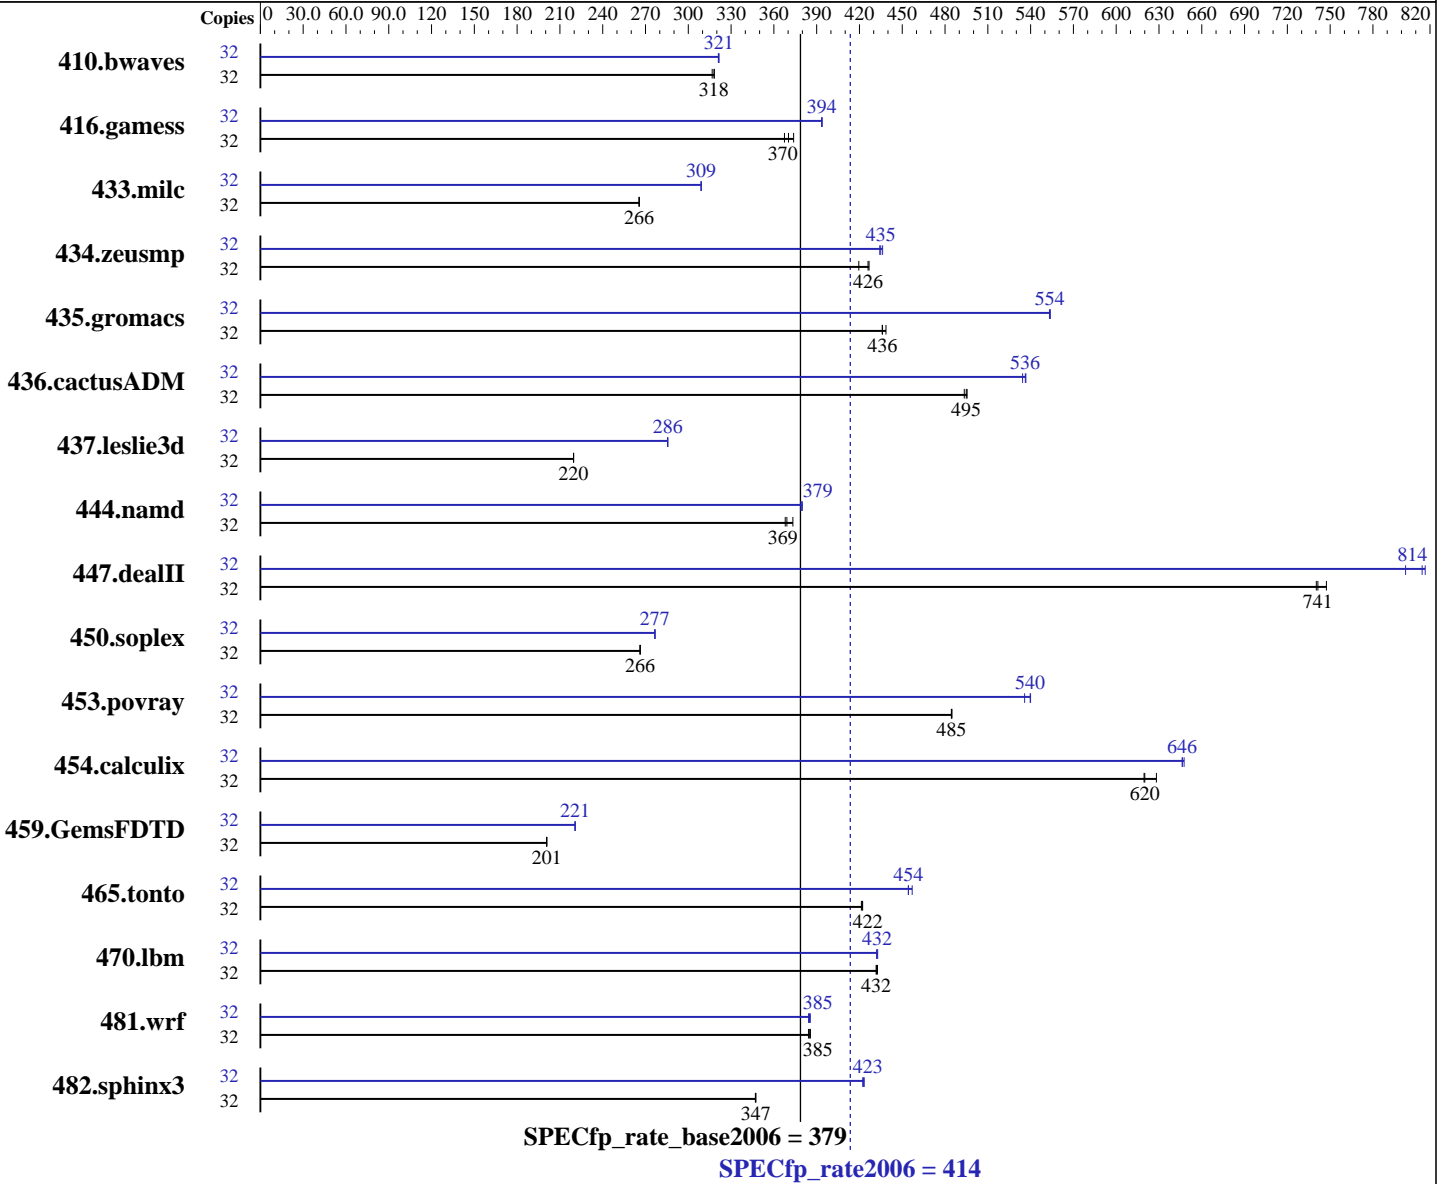

### Hardware

CPU Name: AMD Opteron 6284 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++/Fortran: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 414

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 379

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 3 x 146 GB SAS, 15000 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1373	317	<b><u>1368</u></b>	<b><u>318</u></b>	1366	318	32	1353	322	1354	321	<b><u>1353</u></b>	<b><u>321</u></b>
416.gamess	32	<b><u>1692</u></b>	<b><u>370</u></b>	1705	367	1676	374	32	1592	394	<b><u>1592</u></b>	<b><u>394</u></b>	1591	394
433.milc	32	1106	266	1106	266	<b><u>1106</u></b>	<b><u>266</u></b>	32	950	309	<b><u>951</u></b>	<b><u>309</u></b>	951	309
434.zeusmp	32	694	420	<b><u>684</u></b>	<b><u>426</u></b>	682	427	32	671	434	<b><u>670</u></b>	<b><u>435</u></b>	668	436
435.gromacs	32	521	439	<b><u>524</u></b>	<b><u>436</u></b>	524	436	32	<b><u>413</u></b>	<b><u>554</u></b>	413	553	413	554
436.cactusADM	32	<b><u>773</u></b>	<b><u>495</u></b>	775	493	772	495	32	716	534	<b><u>713</u></b>	<b><u>536</u></b>	713	537
437.leslie3d	32	<b><u>1370</u></b>	<b><u>220</u></b>	1370	220	1370	220	32	1053	286	<b><u>1053</u></b>	<b><u>286</u></b>	1054	285
444.namd	32	687	373	<b><u>695</u></b>	<b><u>369</u></b>	697	368	32	677	379	675	380	<b><u>677</u></b>	<b><u>379</u></b>
447.dealII	32	<b><u>494</u></b>	<b><u>741</u></b>	490	747	495	740	32	<b><u>449</u></b>	<b><u>814</u></b>	448	817	456	803
450.soplex	32	<b><u>1003</u></b>	<b><u>266</u></b>	1002	266	1003	266	32	965	277	<b><u>965</u></b>	<b><u>277</u></b>	964	277
453.povray	32	351	485	351	484	<b><u>351</u></b>	<b><u>485</u></b>	32	315	540	318	536	<b><u>315</u></b>	<b><u>540</u></b>
454.calculix	32	426	620	420	628	<b><u>426</u></b>	<b><u>620</u></b>	32	<b><u>408</u></b>	<b><u>646</u></b>	408	646	408	648
459.GemsFDTD	32	1692	201	1691	201	<b><u>1691</u></b>	<b><u>201</u></b>	32	<b><u>1539</u></b>	<b><u>221</u></b>	1538	221	1539	221
465.tonto	32	747	421	746	422	<b><u>746</u></b>	<b><u>422</u></b>	32	<b><u>693</u></b>	<b><u>454</u></b>	693	454	689	457
470.lbm	32	1016	433	1018	432	<b><u>1018</u></b>	<b><u>432</u></b>	32	1016	433	1018	432	<b><u>1017</u></b>	<b><u>432</u></b>
481.wrf	32	927	386	930	384	<b><u>928</u></b>	<b><u>385</u></b>	32	927	386	<b><u>928</u></b>	<b><u>385</u></b>	930	384
482.sphinx3	32	1797	347	1796	347	<b><u>1796</u></b>	<b><u>347</u></b>	32	<b><u>1475</u></b>	<b><u>423</u></b>	1473	423	1477	422

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 414

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 379

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/root/cpu2006/amd1104-rate-libs-revC/32:/root/cpu2006/amd1104-rate-libs-revC/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 414

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 379

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 414

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 379

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: -march=bdver1 -Ofast -CG:cmp_peep=on
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -mso

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=1000
-OPT:malloc_alg=2 -CG:cmp_peep=on -CG:local_sched_alg=2
-CG:p2align=0 -INLINE:aggressive=on -LNO:prefetch=2
-LNO:prefetch_ahead=4 -mso

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=3000
-LNO:ignore_feedback=off -CG:local_sched_alg=2
-CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions
-HP:bdt=2m:heap=2m

447.dealIII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 414

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 379

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

## Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:ignore\_feedback=off  
 -INLINE:aggressive=on -OPT:RO=1 -OPT:IEEE\_arith=3  
 -OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
 -fno-exceptions -CG:p2align=0 -m32 -HP:bdt=2m:heap=2m  
 -WOPT:sib=on

453.povray: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
 -CG:p2align=0 -CG:p2align\_split=on -CG:dsched=on  
 -INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2  
 -OPT:alias=disjoint -WOPT:aggcm=0

### Fortran benchmarks:

410.bwaves: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
 -LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
 -LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
 -WOPT:aggstr=0 -HP:bdt=2m:heap=2m -CG:cmp\_peep=on

416.gamess: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
 -LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
 -HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off  
 -IPA:plimit=1500 -HP:bdt=2m:heap=2m

437.leslie3d: -march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
 -LNO:fusion=2 -HP:bdt=2m:heap=2m -mso

459.GemsFDTD: -march=bdver1 -Ofast -IPA:plimit=1500 -OPT:unroll\_size=0  
 -LNO:fission=2 -CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto: -march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
 -LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
 -HP:bdt=2m:heap=2m

### Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
 -HP:bdt=2m:heap=2m -CG:local\_sched\_alg=2 -GRA:unspill=ON  
 -CG:load\_exe=3 -LNO:simd=3

436.cactusADM: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
 -LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
 -CG:dsched=on -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 414

PowerEdge R715 (AMD Opteron 6284 SE, 2.70 GHz)

SPECfp\_rate\_base2006 = 379

CPU2006 license: 55

Test date: Jun-2012

Test sponsor: Dell Inc.

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jul-2011

## Peak Optimization Flags (Continued)

454.calculix: -march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m

481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-CG:load\_exe=1 -HP -WOPT:sib=on

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.html>  
<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA-I.xml>  
<http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:25:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 July 2012.