



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

### SPECfp®\_rate2006 = 60.8

### Express5800/GT110e-S (Intel Pentium G640)

### SPECfp\_rate\_base2006 = 59.6

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Aug-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

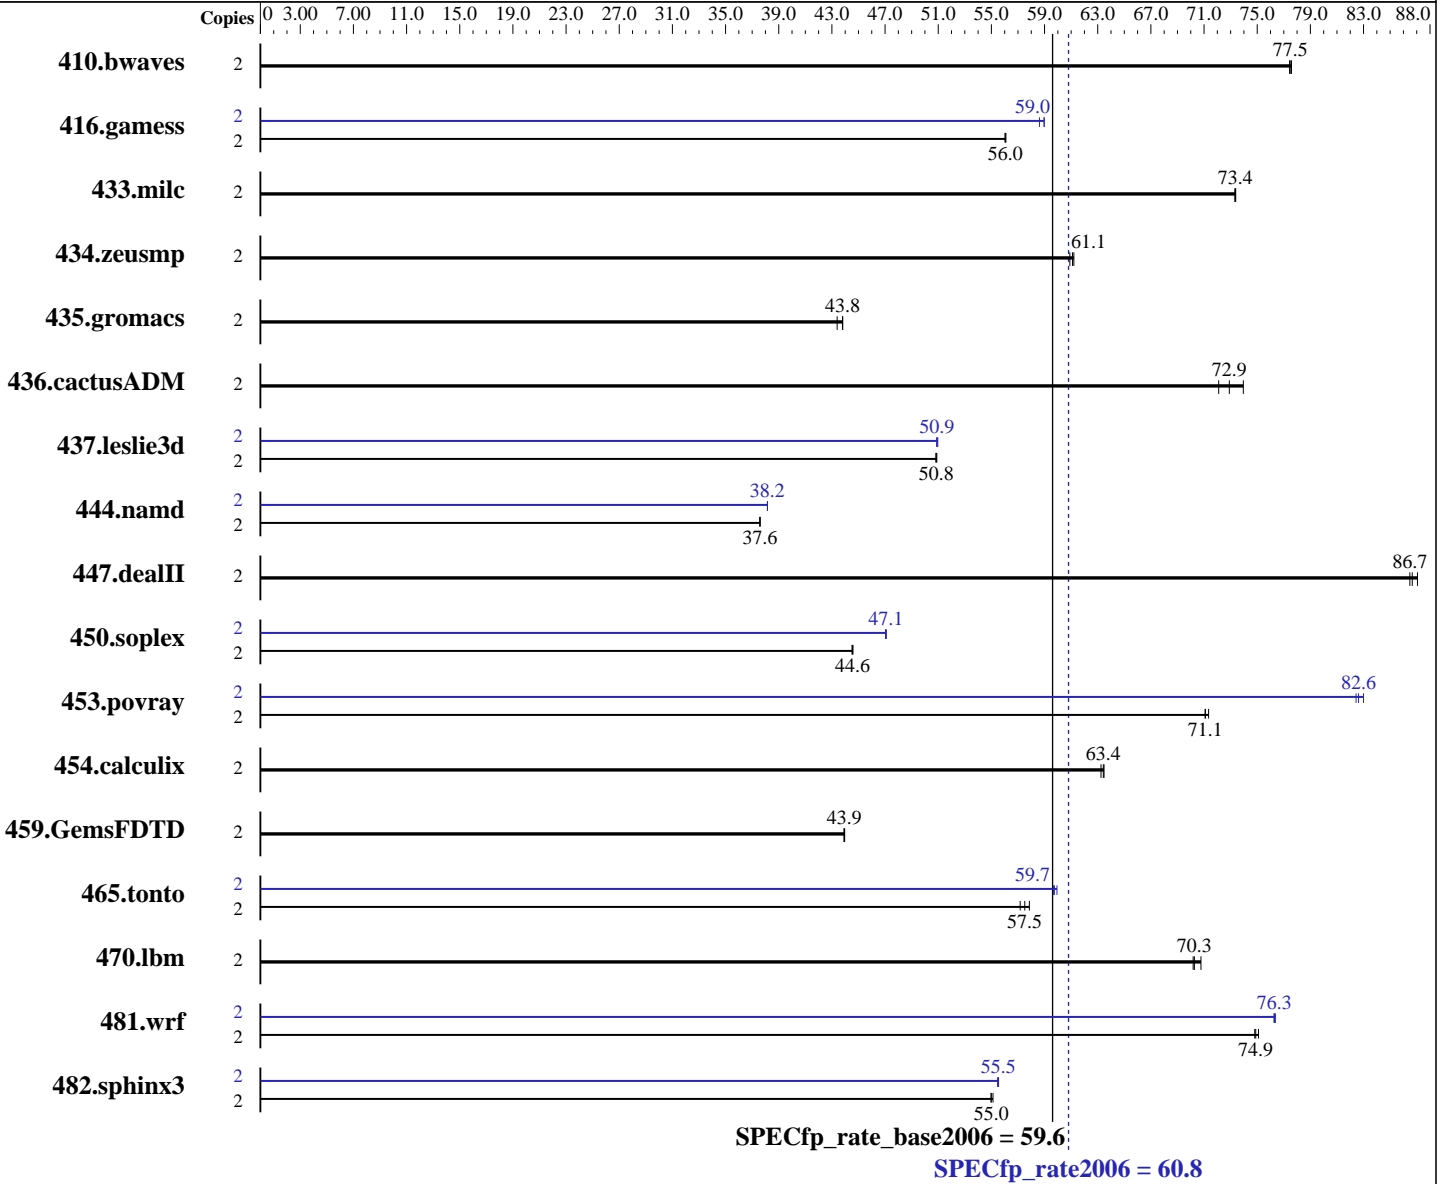

#### Hardware

CPU Name: Intel Pentium G640  
 CPU Characteristics:  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp\_rate2006 = **60.8**

Express5800/GT110e-S (Intel Pentium G640)

SPECfp\_rate\_base2006 = **59.6**

CPU2006 license: 9006

Test date: Aug-2012

Test sponsor: NEC Corporation

Hardware Availability: Jul-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	2	350	77.6	351	77.4	<b>351</b>	<b>77.5</b>	2	350	77.6	351	77.4	<b>351</b>	<b>77.5</b>		
416.gamess	2	<b>699</b>	<b>56.0</b>	698	56.1	699	56.0	2	668	58.6	664	59.0	<b>664</b>	<b>59.0</b>		
433.milc	2	<b>250</b>	<b>73.4</b>	250	73.4	250	73.3	2	<b>250</b>	<b>73.4</b>	250	73.4	250	73.3		
434.zeusmp	2	299	60.9	<b>298</b>	<b>61.1</b>	297	61.2	2	299	60.9	<b>298</b>	<b>61.1</b>	297	61.2		
435.gromacs	2	<b>326</b>	<b>43.8</b>	326	43.8	329	43.4	2	<b>326</b>	<b>43.8</b>	326	43.8	329	43.4		
436.cactusADM	2	323	74.0	<b>328</b>	<b>72.9</b>	331	72.1	2	323	74.0	<b>328</b>	<b>72.9</b>	331	72.1		
437.leslie3d	2	369	50.9	<b>370</b>	<b>50.8</b>	370	50.8	2	370	50.9	369	51.0	<b>369</b>	<b>50.9</b>		
444.namd	2	427	37.6	427	37.6	<b>427</b>	<b>37.6</b>	2	420	38.2	420	38.1	<b>420</b>	<b>38.2</b>		
447.dealII	2	263	87.1	<b>264</b>	<b>86.7</b>	265	86.5	2	263	87.1	<b>264</b>	<b>86.7</b>	265	86.5		
450.soplex	2	375	44.5	374	44.6	<b>374</b>	<b>44.6</b>	2	355	47.0	<b>354</b>	<b>47.1</b>	354	47.1		
453.povray	2	150	71.1	<b>150</b>	<b>71.1</b>	149	71.3	2	128	83.0	<b>129</b>	<b>82.6</b>	129	82.4		
454.calculix	2	260	63.5	<b>260</b>	<b>63.4</b>	261	63.2	2	260	63.5	<b>260</b>	<b>63.4</b>	261	63.2		
459.GemsFDTD	2	<b>483</b>	<b>43.9</b>	483	44.0	483	43.9	2	<b>483</b>	<b>43.9</b>	483	44.0	483	43.9		
465.tonto	2	<b>342</b>	<b>57.5</b>	344	57.2	340	57.9	2	330	59.7	328	59.9	<b>329</b>	<b>59.7</b>		
470.lbm	2	388	70.8	392	70.2	<b>391</b>	<b>70.3</b>	2	388	70.8	392	70.2	<b>391</b>	<b>70.3</b>		
481.wrf	2	297	75.1	<b>298</b>	<b>74.9</b>	299	74.8	2	293	76.3	<b>293</b>	<b>76.3</b>	293	76.4		
482.sphinx3	2	707	55.1	<b>709</b>	<b>55.0</b>	709	55.0	2	702	55.5	<b>702</b>	<b>55.5</b>	703	55.5		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Default BIOS settings were used.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp\_rate2006 = 60.8**

**Express5800/GT110e-S (Intel Pentium G640)**

**SPECfp\_rate\_base2006 = 59.6**

**CPU2006 license:** 9006

**Test date:** Aug-2012

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2012

**Tested by:** NEC Corporation

**Software Availability:** Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Added glibc-static-2.12-1.47.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp\_rate2006 = 60.8**

**Express5800/GT110e-S (Intel Pentium G640)**

**SPECfp\_rate\_base2006 = 59.6**

**CPU2006 license:** 9006

**Test date:** Aug-2012

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2012

**Tested by:** NEC Corporation

**Software Availability:** Feb-2012

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3:icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex:icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

`410.bwaves: -DSPEC_CPU_LP64`

`416.gamess: -DSPEC_CPU_LP64`

`433.milc: -DSPEC_CPU_LP64`

`434.zeusmp: -DSPEC_CPU_LP64`

`435.gromacs: -DSPEC_CPU_LP64 -nofor_main`

`436.cactusADM: -DSPEC_CPU_LP64 -nofor_main`

`437.leslie3d: -DSPEC_CPU_LP64`

`444.namd: -DSPEC_CPU_LP64`

`447.deallI: -DSPEC_CPU_LP64`

`453.povray: -DSPEC_CPU_LP64`

Continued on next page

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 60.8

Express5800/GT110e-S (Intel Pentium G640)

SPECfp\_rate\_base2006 = 59.6

CPU2006 license: 9006

Test date: Aug-2012

Test sponsor: NEC Corporation

Hardware Availability: Jul-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes  
 470.lbm: basepeak = yes  
 482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32  
 447.dealIII: basepeak = yes  
 450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3  
 453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes  
 416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static  
 434.zeusmp: basepeak = yes  
 437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
 459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp\_rate2006 = 60.8**

**Express5800/GT110e-S (Intel Pentium G640)**

**SPECfp\_rate\_base2006 = 59.6**

**CPU2006 license:** 9006

**Test date:** Aug-2012

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2012

**Tested by:** NEC Corporation

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:05:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 August 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>