



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 206

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECfp_rate_base2006 = 200

CPU2006 license: 19


Test date: Jun-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

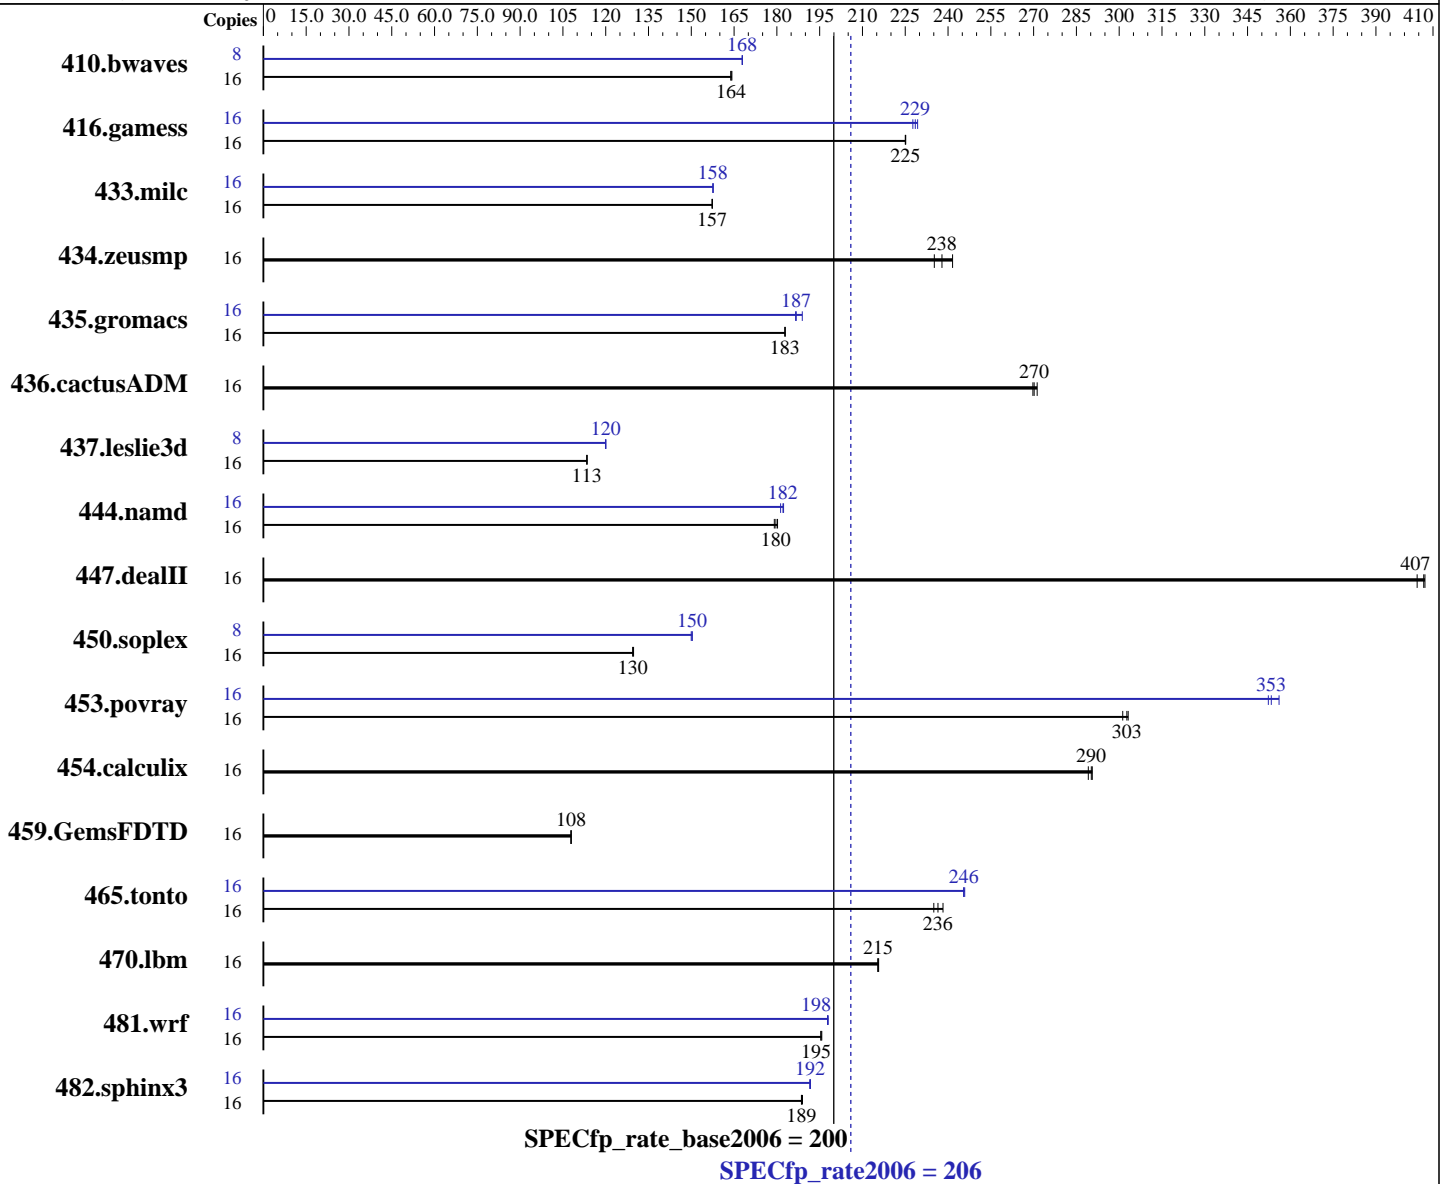

Hardware

CPU Name: Intel Xeon E5-2450
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 206

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECfp_rate_base2006 = 200

CPU2006 license: 19

Test date: Jun-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1324	164	<u>1326</u>	<u>164</u>	1327	164	8	648	168	<u>648</u>	<u>168</u>	648	168
416.gamess	16	1391	225	1392	225	<u>1392</u>	<u>225</u>	16	1376	228	1366	229	<u>1371</u>	<u>229</u>
433.milc	16	<u>933</u>	<u>157</u>	933	157	934	157	16	<u>932</u>	<u>158</u>	932	158	932	158
434.zeusmp	16	619	235	603	242	<u>612</u>	<u>238</u>	16	619	235	603	242	<u>612</u>	<u>238</u>
435.gromacs	16	625	183	625	183	<u>625</u>	<u>183</u>	16	612	187	605	189	<u>612</u>	<u>187</u>
436.cactusADM	16	709	270	<u>708</u>	<u>270</u>	705	271	16	709	270	<u>708</u>	<u>270</u>	705	271
437.leslie3d	16	<u>1326</u>	<u>113</u>	1327	113	1325	113	8	627	120	<u>627</u>	<u>120</u>	626	120
444.namd	16	<u>714</u>	<u>180</u>	712	180	716	179	16	<u>705</u>	<u>182</u>	708	181	704	182
447.dealII	16	453	404	<u>450</u>	<u>407</u>	450	407	16	453	404	<u>450</u>	<u>407</u>	450	407
450.soplex	16	1031	129	<u>1030</u>	<u>130</u>	1028	130	8	<u>444</u>	<u>150</u>	444	150	445	150
453.povray	16	283	301	281	303	<u>281</u>	<u>303</u>	16	<u>241</u>	<u>353</u>	242	352	239	356
454.calculix	16	456	289	<u>455</u>	<u>290</u>	454	291	16	456	289	<u>455</u>	<u>290</u>	454	291
459.GemsFDTD	16	<u>1574</u>	<u>108</u>	1573	108	1574	108	16	<u>1574</u>	<u>108</u>	1573	108	1574	108
465.tonto	16	<u>666</u>	<u>236</u>	661	238	670	235	16	640	246	<u>641</u>	<u>246</u>	641	245
470.lbm	16	1019	216	<u>1020</u>	<u>215</u>	1021	215	16	1019	216	<u>1020</u>	<u>215</u>	1021	215
481.wrf	16	<u>914</u>	<u>195</u>	915	195	913	196	16	903	198	904	198	<u>904</u>	<u>198</u>
482.sphinx3	16	1650	189	1653	189	<u>1653</u>	<u>189</u>	16	<u>1627</u>	<u>192</u>	1628	192	1626	192

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 206

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECfp_rate_base2006 = 200

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2012
Hardware Availability: Jul-2012
Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Binaries compiled on a system with 2x E5-2650 CPU + 96 GB
memory using RHEL6.2
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 206

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECfp_rate_base2006 = 200

CPU2006 license: 19

Test date: Jun-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 206

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECfp_rate_base2006 = 200

CPU2006 license: 19

Test date: Jun-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

Peak Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 206

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECfp_rate_base2006 = 200

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2012
Hardware Availability: Jul-2012
Software Availability: Feb-2012

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-p32 -ansi-alias -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:06:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 August 2012.