



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint[®]_rate2006 = 309

Servidor Itaotec MX215 (Intel Xeon E5-2665)

SPECint_rate_base2006 = 297

CPU2006 license: 9001


Test date: Aug-2012

Test sponsor: Itaotec

Hardware Availability: Jun-2012

Tested by: Itaotec

Software Availability: Dec-2011

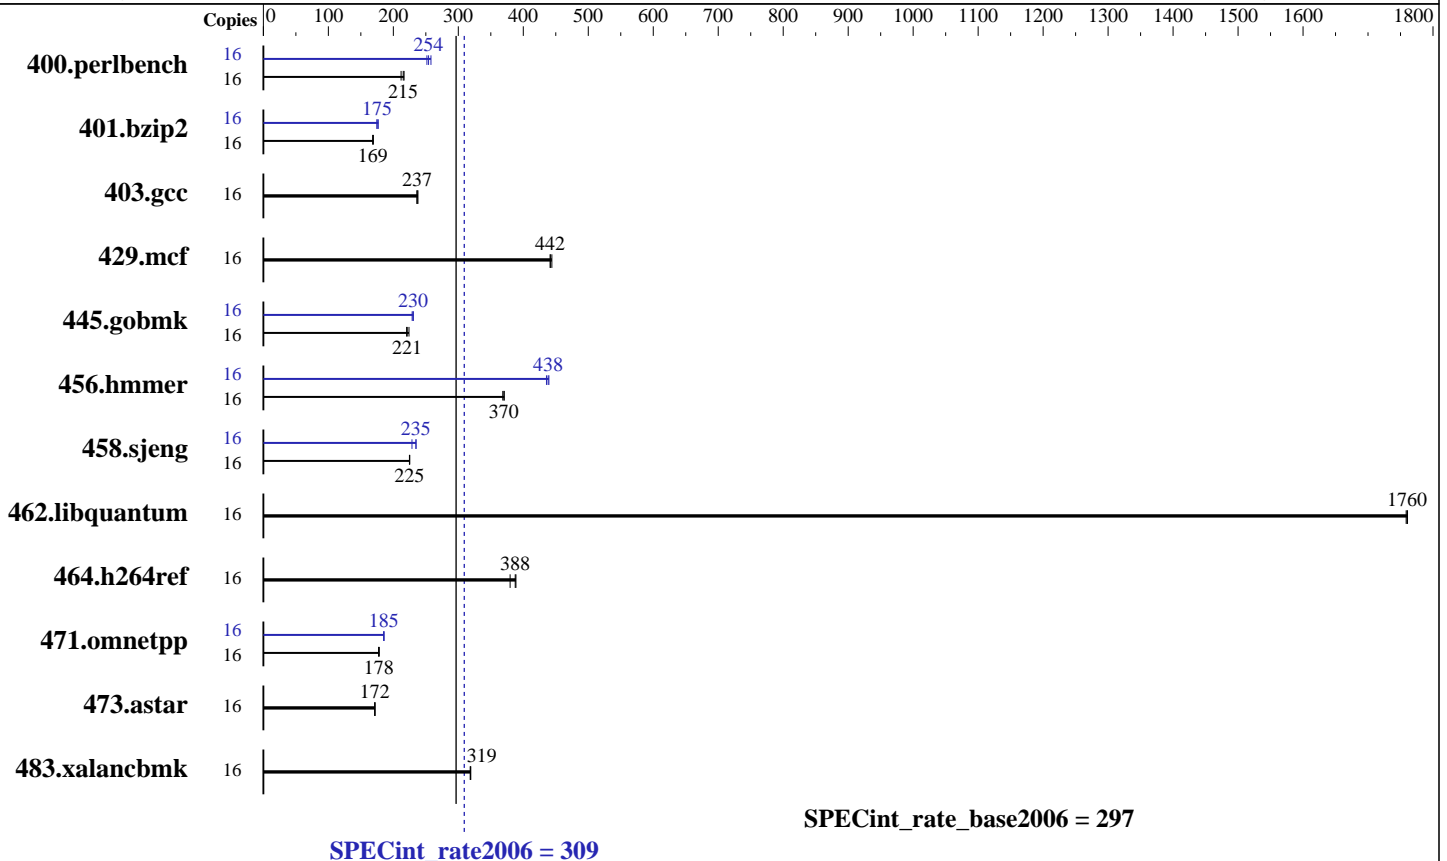

Hardware

CPU Name: Intel Xeon E5-2665
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB 1Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 500 GB, SATA-2, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.2, 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 309

Servidor Itaotec MX215 (Intel Xeon E5-2665)

SPECint_rate_base2006 = 297

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Aug-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<u>726</u>	<u>215</u>	738	212	722	217	16	<u>615</u>	<u>254</u>	621	252	606	258
401.bzip2	16	<u>916</u>	<u>169</u>	917	168	912	169	16	884	175	873	177	<u>882</u>	<u>175</u>
403.gcc	16	541	238	<u>544</u>	<u>237</u>	545	236	16	541	238	<u>544</u>	<u>237</u>	545	236
429.mcf	16	329	444	331	441	<u>330</u>	<u>442</u>	16	329	444	331	441	<u>330</u>	<u>442</u>
445.gobmk	16	<u>758</u>	<u>221</u>	749	224	761	220	16	733	229	727	231	<u>729</u>	<u>230</u>
456.hammer	16	<u>403</u>	<u>370</u>	403	371	405	368	16	343	436	340	439	<u>341</u>	<u>438</u>
458.sjeng	16	<u>861</u>	<u>225</u>	859	225	861	225	16	847	229	<u>825</u>	<u>235</u>	824	235
462.libquantum	16	188	1760	<u>188</u>	<u>1760</u>	189	1760	16	188	1760	<u>188</u>	<u>1760</u>	189	1760
464.h264ref	16	933	380	911	389	<u>914</u>	<u>388</u>	16	933	380	911	389	<u>914</u>	<u>388</u>
471.omnetpp	16	564	177	561	178	<u>563</u>	<u>178</u>	16	539	186	<u>539</u>	<u>185</u>	540	185
473.astar	16	656	171	<u>655</u>	<u>172</u>	654	172	16	656	171	<u>655</u>	<u>172</u>	654	172
483.xalancbmk	16	<u>346</u>	<u>319</u>	346	319	347	318	16	<u>346</u>	<u>319</u>	346	319	347	318

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c
running on localhost Tue Aug 21 15:35:34 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Genuine Intel(R) CPU @ 2.40GHz
1 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 309

Servidor Itautec MX215 (Intel Xeon E5-2665)

SPECint_rate_base2006 = 297

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Aug-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Platform Notes (Continued)

physical 0: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal: 32824920 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 21 15:24

SPEC is set to: /home/rcaneca/cpu2006
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/vg_it5rh-lv_home
ext4 193G 1.9G 181G 2% /home

(End of data from sysinfo program)

General Notes

This result was measured on the Servidor Itautec MX225.
The Servidor Itautec MX215 and the Servidor Itautec MX225
are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 309

Servidor Itaotec MX215 (Intel Xeon E5-2665)

SPECint_rate_base2006 = 297

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Aug-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmer: icc -m64
458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 309

Servidor Itaotec MX215 (Intel Xeon E5-2665)

SPECint_rate_base2006 = 297

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Aug-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmarheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 309

Servidor Itaotec MX215 (Intel Xeon E5-2665)

SPECint_rate_base2006 = 297

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Aug-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Itaotec-Servidor_Itaotec-Intel-Linux-Platform.html
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Itaotec-Servidor_Itaotec-Intel-Linux-Platform.xml
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 10:19:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 September 2012.