



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint®2006 = 36.3

PRIMERGY TX100 S3p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.5

CPU2006 license: 19


Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: Jun-2012

Tested by: Fujitsu

Software Availability: Feb-2012

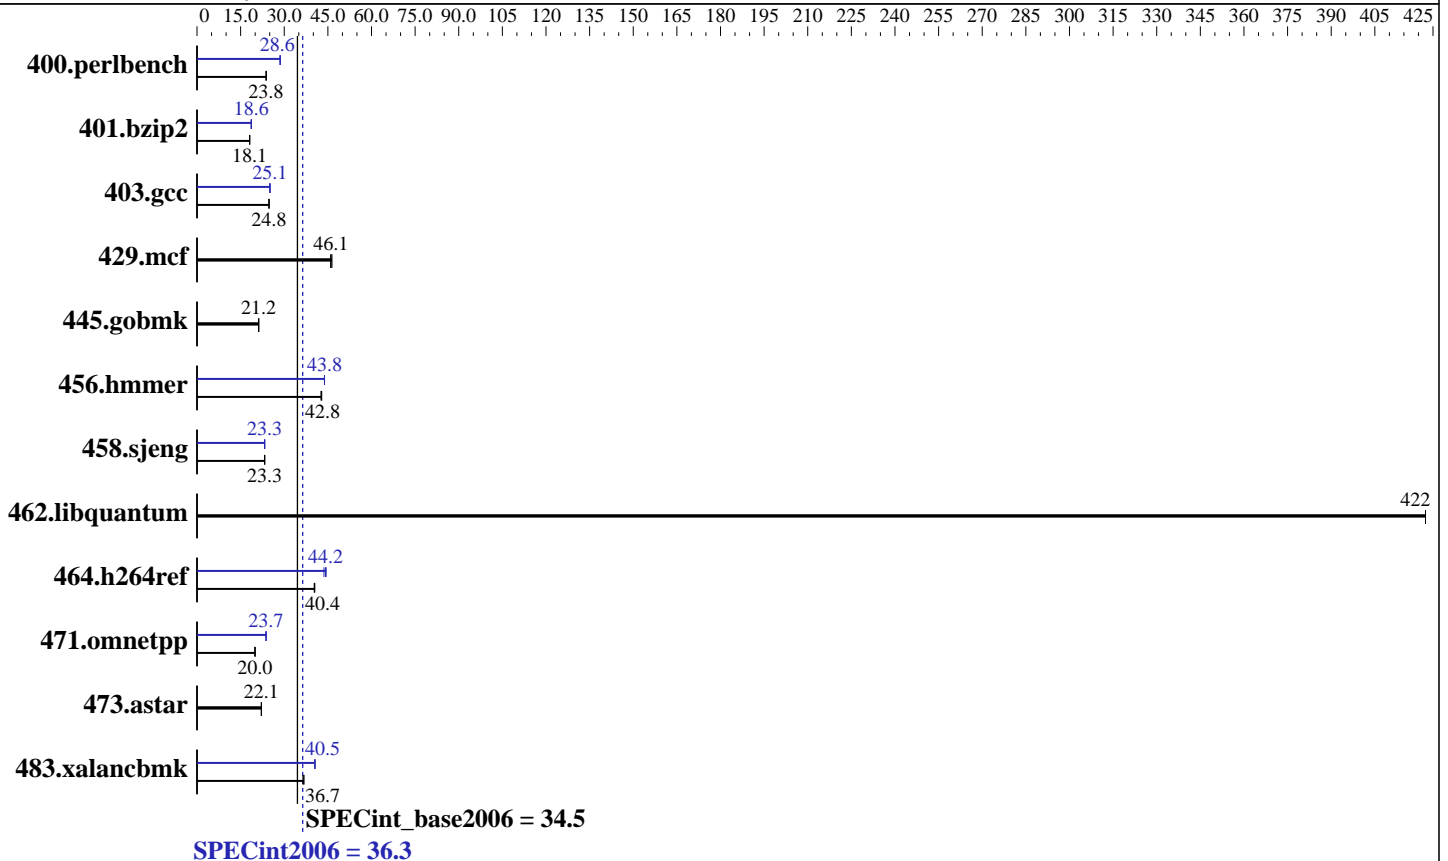

Hardware

CPU Name: Intel Pentium G640
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC, running at 1067 MHz and CL7)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = **36.3**

PRIMERGY TX100 S3p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = **34.5**

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: Jun-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	411	23.8	411	23.8	410	23.8	341	28.6	342	28.6	342	28.6
401.bzip2	533	18.1	532	18.1	533	18.1	518	18.6	515	18.7	518	18.6
403.gcc	325	24.8	325	24.8	325	24.8	321	25.1	321	25.1	322	25.0
429.mcf	198	46.1	199	45.9	197	46.4	198	46.1	199	45.9	197	46.4
445.gobmk	495	21.2	495	21.2	494	21.2	495	21.2	495	21.2	494	21.2
456.hammer	219	42.6	218	42.8	218	42.9	213	43.8	213	43.8	213	43.9
458.sjeng	520	23.3	520	23.3	520	23.3	520	23.3	520	23.3	520	23.3
462.libquantum	49.1	422	49.1	422	49.1	422	49.1	422	49.1	422	49.1	422
464.h264ref	548	40.4	546	40.5	549	40.3	501	44.2	507	43.7	498	44.4
471.omnetpp	312	20.0	313	20.0	314	19.9	263	23.7	263	23.8	263	23.7
473.astar	316	22.2	317	22.1	318	22.1	316	22.2	317	22.1	318	22.1
483.xalancbmk	189	36.4	188	36.7	188	36.7	170	40.5	170	40.5	170	40.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"
OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 36.3

PRIMERGY TX100 S3p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.5

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: Jun-2012

Tested by: Fujitsu

Software Availability: Feb-2012

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`464.h264ref: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

`473.astar: icpc -m64`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 36.3

PRIMERGY TX100 S3p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block -ansi-alias
              -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 36.3

PRIMERGY TX100 S3p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.5

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 12:59:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 October 2012.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>