



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®\_rate2006 = 390

Servidor Itaotec MX225+ (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 371

CPU2006 license: 9001


Test date: Mar-2012

Test sponsor: Itaotec

Hardware Availability: Jun-2012

Tested by: Itaotec

Software Availability: Dec-2011

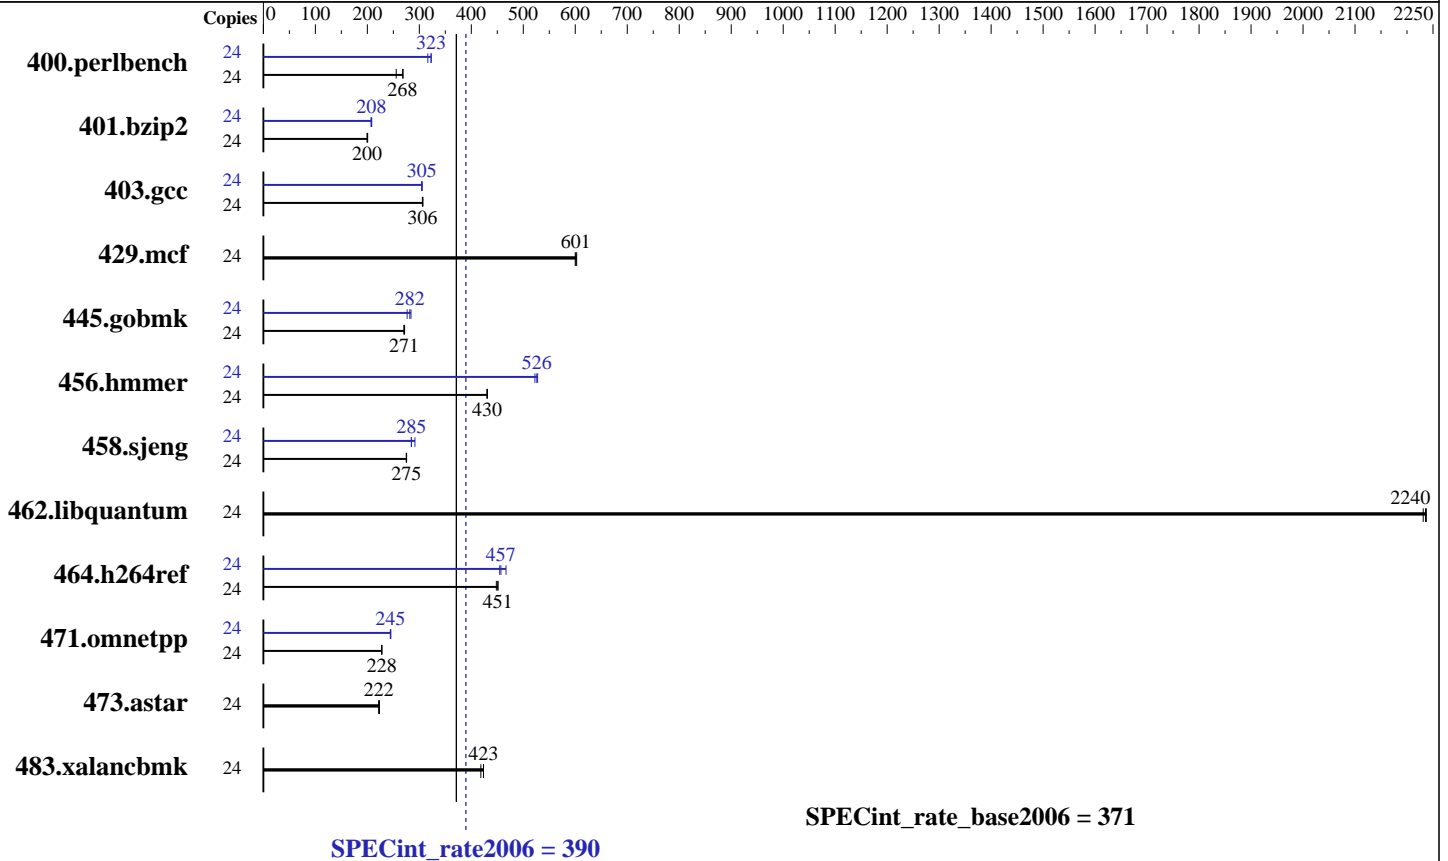

**Hardware**

CPU Name: Intel Xeon E5-2630L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
 Disk Subsystem: 500 GB, SATA-2, 7200 RPM  
 Other Hardware: None

**Software**

Operating System: Red Hat Enterprise Linux Server Release 6.2, (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 390

Servidor Itaotec MX225+ (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 371

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Mar-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	872	269	<b>875</b>	<b>268</b>	918	256	24	<b>727</b>	<b>323</b>	741	316	726	323
401.bzip2	24	<b>1159</b>	<b>200</b>	1160	200	1154	201	24	<b>1113</b>	<b>208</b>	1119	207	1111	208
403.gcc	24	632	306	629	307	<b>631</b>	<b>306</b>	24	<b>634</b>	<b>305</b>	635	304	632	306
429.mcf	24	363	603	<b>364</b>	<b>601</b>	365	600	24	363	603	<b>364</b>	<b>601</b>	365	600
445.gobmk	24	<b>929</b>	<b>271</b>	927	272	931	270	24	<b>894</b>	<b>282</b>	910	277	886	284
456.hammer	24	521	430	519	431	<b>520</b>	<b>430</b>	24	<b>426</b>	<b>526</b>	429	522	424	528
458.sjeng	24	1054	276	<b>1055</b>	<b>275</b>	1056	275	24	996	292	1021	284	<b>1019</b>	<b>285</b>
462.libquantum	24	223	2230	<b>222</b>	<b>2240</b>	222	2240	24	223	2230	<b>222</b>	<b>2240</b>	222	2240
464.h264ref	24	1185	448	<b>1178</b>	<b>451</b>	1177	451	24	<b>1162</b>	<b>457</b>	1138	467	1168	455
471.omnetpp	24	659	228	658	228	<b>659</b>	<b>228</b>	24	612	245	<b>613</b>	<b>245</b>	614	244
473.astar	24	759	222	754	223	<b>758</b>	<b>222</b>	24	759	222	754	223	<b>758</b>	<b>222</b>
483.xalancbmk	24	<b>391</b>	<b>423</b>	391	423	396	418	24	<b>391</b>	<b>423</b>	391	423	396	418

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## General Notes

This result was measured on the Servidor Itaotec MX205.  
The Servidor Itaotec MX205, the Servidor Itaotec LX205 and the Servidor Itaotec MX225+ are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 390

Servidor Itautec MX225+ (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 371

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Mar-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmmer: icc -m64  
458.sjeng: icc -m64  
C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint\_rate2006 = 390

Servidor Itaotec MX225+ (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 371

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Mar-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
401.bzp2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias  
403.gcc: -xAVX -ipo -O3 -no-prec-div  
429.mcf: basepeak = yes  
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap  
473.astar: basepeak = yes  
483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 390

Servidor Itautec MX225+ (Intel Xeon E5-2630L)

SPECint\_rate\_base2006 = 371

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Mar-2012  
Hardware Availability: Jun-2012  
Software Availability: Dec-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.html](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Itautec-Servidor\\_Itautec-Intel-Linux-Platform.xml](http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml)  
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 12:54:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 October 2012.