



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

### SPECfp®\_rate2006 = 482

### ASUS RS724Q-E7(Z9PH-D16) Server System (Intel Xeon E5-2670)

### SPECfp\_rate\_base2006 = 468

CPU2006 license: 9016


Test date: Aug-2012

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2012

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2011

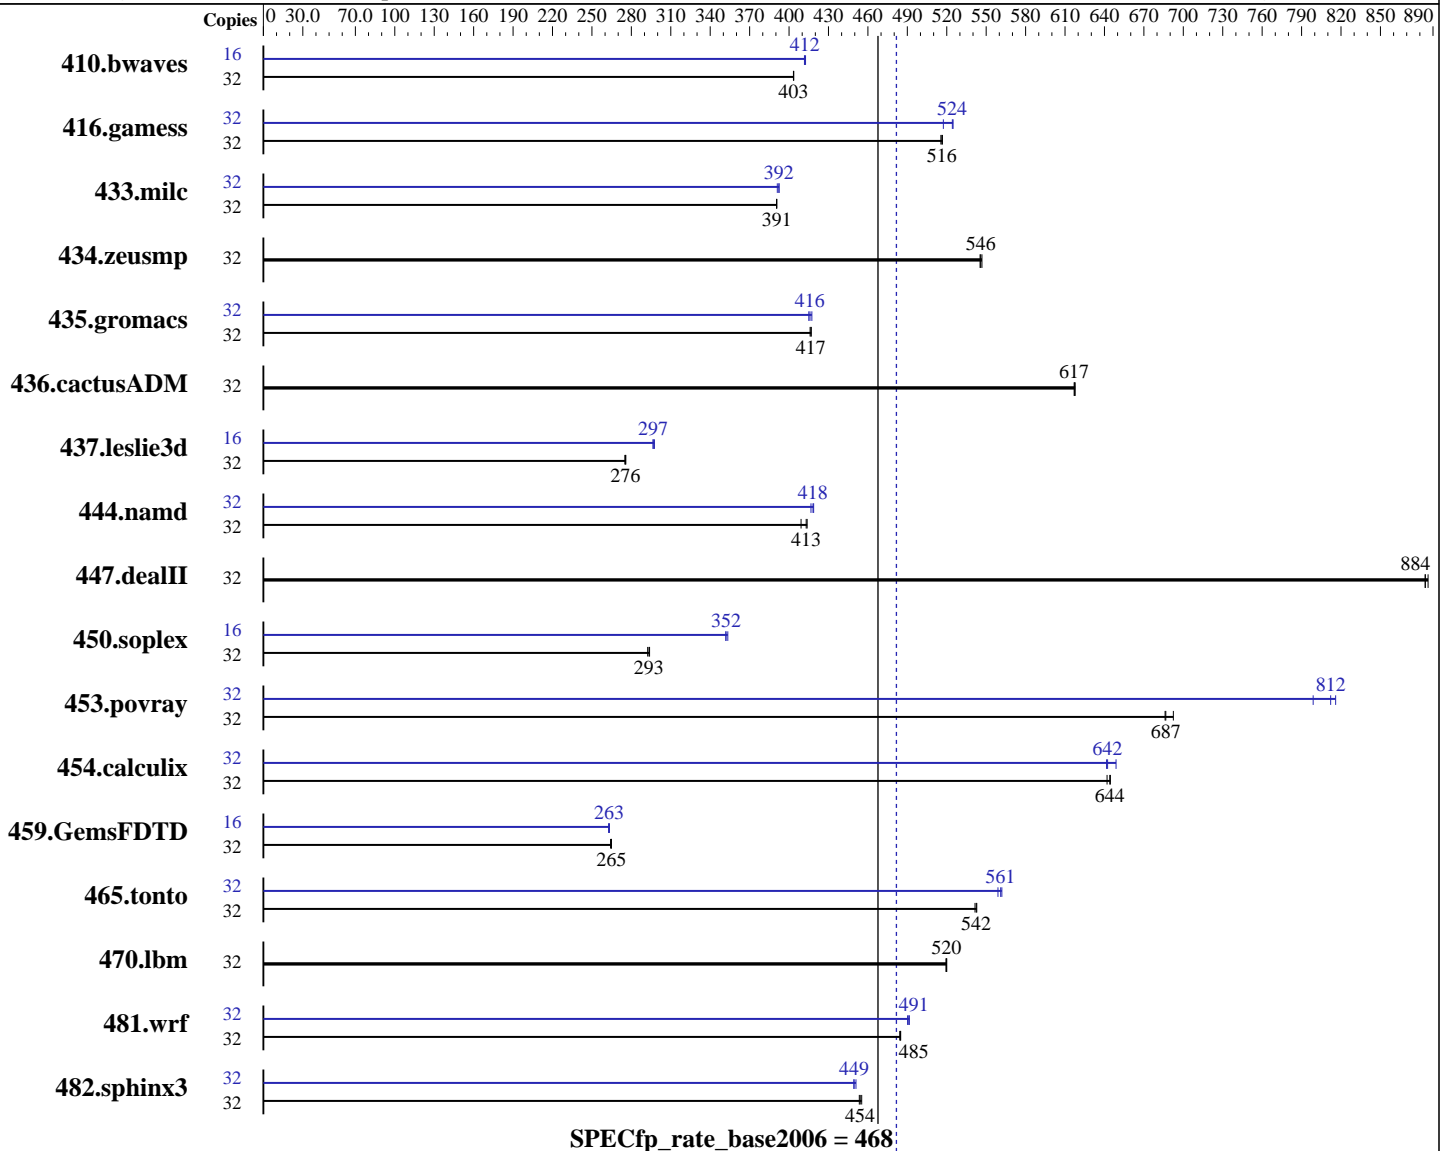

SPECfp\_rate2006 = 482

#### Hardware

CPU Name: Intel Xeon E5-2670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp\_rate2006 = **482**

ASUS RS724Q-E7(Z9PH-D16) Server System  
(Intel Xeon E5-2670)

SPECfp\_rate\_base2006 = **468**

CPU2006 license: 9016

Test date: Aug-2012

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2012

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1078	403	<b>1078</b>	<b>403</b>	1078	404	16	528	412	527	413	<b>528</b>	<b>412</b>
416.gamess	32	1213	517	<b>1214</b>	<b>516</b>	1215	516	32	1194	525	<b>1195</b>	<b>524</b>	1211	517
433.milc	32	<b>752</b>	<b>391</b>	752	390	752	391	32	751	391	<b>749</b>	<b>392</b>	749	392
434.zeusmp	32	<b>534</b>	<b>546</b>	533	547	534	545	32	<b>534</b>	<b>546</b>	533	547	534	545
435.gromacs	32	548	417	549	416	<b>548</b>	<b>417</b>	32	<b>549</b>	<b>416</b>	551	415	547	417
436.cactusADM	32	620	617	619	618	<b>620</b>	<b>617</b>	32	620	617	619	618	<b>620</b>	<b>617</b>
437.leslie3d	32	1091	276	1094	275	<b>1092</b>	<b>276</b>	16	507	297	505	298	<b>507</b>	<b>297</b>
444.namd	32	620	414	627	409	<b>621</b>	<b>413</b>	32	<b>614</b>	<b>418</b>	613	419	616	417
447.dealII	32	414	884	<b>414</b>	<b>884</b>	413	886	32	414	884	<b>414</b>	<b>884</b>	413	886
450.soplex	32	908	294	913	292	<b>910</b>	<b>293</b>	16	378	353	379	352	<b>379</b>	<b>352</b>
453.povray	32	246	692	248	686	<b>248</b>	<b>687</b>	32	<b>210</b>	<b>812</b>	209	816	213	799
454.calculix	32	410	645	<b>410</b>	<b>644</b>	411	642	32	407	649	411	642	<b>411</b>	<b>642</b>
459.GemsFDTD	32	1285	264	<b>1282</b>	<b>265</b>	1282	265	16	645	263	<b>645</b>	<b>263</b>	646	263
465.tonto	32	<b>580</b>	<b>542</b>	581	542	580	543	32	<b>561</b>	<b>561</b>	563	559	560	562
470.lbm	32	846	520	847	519	<b>846</b>	<b>520</b>	32	846	520	847	519	<b>846</b>	<b>520</b>
481.wrf	32	737	485	<b>737</b>	<b>485</b>	738	484	32	727	492	729	490	<b>728</b>	<b>491</b>
482.sphinx3	32	1370	455	1375	453	<b>1373</b>	<b>454</b>	32	1383	451	1388	449	<b>1388</b>	<b>449</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost Thu Aug 9 11:04:05 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 482**

ASUS RS724Q-E7(Z9PH-D16) Server System  
(Intel Xeon E5-2670)

**SPECfp\_rate\_base2006 = 468**

**CPU2006 license:** 9016

**Test date:** Aug-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz
2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 132283228 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 9 10:55
```

```
SPEC is set to: /cpu2006
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext4 459G 117G 320G 27% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 482**

ASUS RS724Q-E7(Z9PH-D16) Server System  
(Intel Xeon E5-2670)

**SPECfp\_rate\_base2006 = 468**

**CPU2006 license:** 9016

**Test date:** Aug-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## General Notes (Continued)

```
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 482**

ASUS RS724Q-E7(Z9PH-D16) Server System  
(Intel Xeon E5-2670)

**SPECfp\_rate\_base2006 = 468**

**CPU2006 license:** 9016

**Test date:** Aug-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 482**

ASUS RS724Q-E7(Z9PH-D16) Server System  
(Intel Xeon E5-2670)

**SPECfp\_rate\_base2006 = 468**

**CPU2006 license:** 9016

**Test date:** Aug-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp\_rate2006 = 482**

ASUS RS724Q-E7(Z9PH-D16) Server System  
(Intel Xeon E5-2670)

**SPECfp\_rate\_base2006 = 468**

**CPU2006 license:** 9016

**Test date:** Aug-2012

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2012

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
             -static -auto-ilp32 -opt-mem-layout-trans=3
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
             -opt-mem-layout-trans=3
```

```
481.wrf: Same as 454.calculix
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.20120313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform.20120313.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 12:46:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 October 2012.