



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 2800

IBM Power 770 (4.2 GHz, 48 core)

SPECint_rate_base2006 = 2170

CPU2006 license: 11


Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

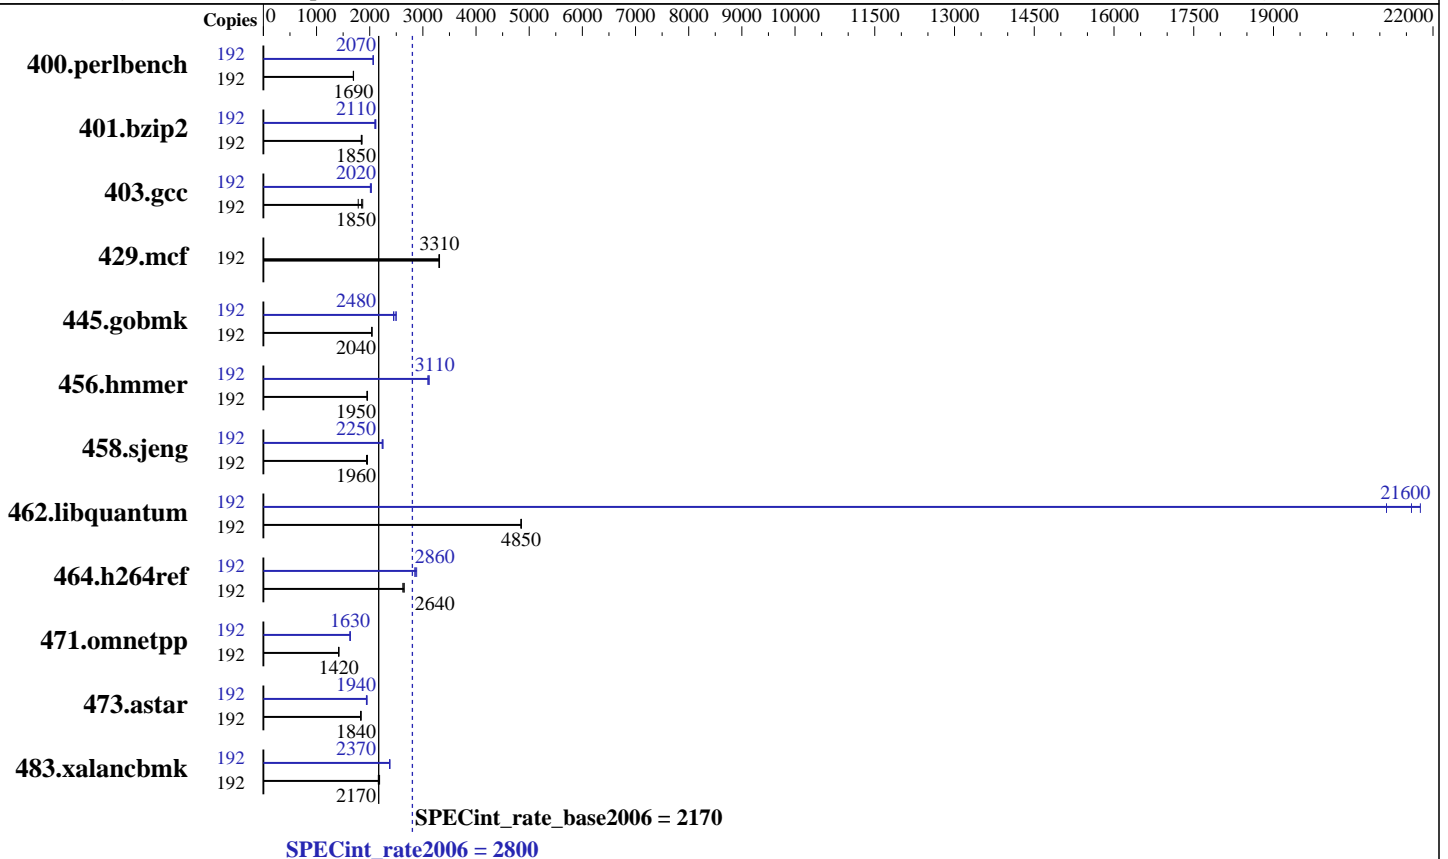

Hardware

CPU Name: POWER7+
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.396 GHz
 CPU MHz: 4228
 FPU: Integrated
 CPU(s) enabled: 48 cores, 16 chips, 3 cores/chip, 4 threads/core
 CPU(s) orderable: 12,24,36,48 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per core
 Other Cache: None
 Memory: 512 GB (64 x 8 GB) DDR3 1066 MHz
 Disk Subsystem: 8 x 146.8 GB 15K RPM Raid0 SFF SAS
 Other Hardware: None

Software

Operating System: IBM AIX V7.1
 Compiler: C/C++: Version 12.1 of IBM XL C/C++ for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2800

IBM Power 770 (4.2 GHz, 48 core)

SPECint_rate_base2006 = 2170

CPU2006 license: 11

Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	192	1109	1690	1106	1700	<u>1107</u>	<u>1690</u>	192	909	2060	<u>908</u>	<u>2070</u>	907	2070
401.bzip2	192	<u>1003</u>	<u>1850</u>	1006	1840	998	1860	192	876	2120	<u>879</u>	<u>2110</u>	884	2100
403.gcc	192	866	1780	827	1870	<u>836</u>	<u>1850</u>	192	<u>763</u>	<u>2020</u>	768	2010	761	2030
429.mcf	192	530	3300	528	3310	<u>529</u>	<u>3310</u>	192	530	3300	528	3310	<u>529</u>	<u>3310</u>
445.gobmk	192	<u>987</u>	<u>2040</u>	986	2040	988	2040	192	823	2450	805	2500	<u>813</u>	<u>2480</u>
456.hmmmer	192	<u>917</u>	<u>1950</u>	914	1960	920	1950	192	574	3120	579	3090	<u>576</u>	<u>3110</u>
458.sjeng	192	<u>1187</u>	<u>1960</u>	1187	1960	1198	1940	192	1040	2230	1033	2250	<u>1034</u>	<u>2250</u>
462.libquantum	192	821	4840	820	4850	<u>820</u>	<u>4850</u>	192	188	21100	<u>184</u>	<u>21600</u>	183	21800
464.h264ref	192	1620	2620	<u>1607</u>	<u>2640</u>	1606	2650	192	1491	2850	<u>1487</u>	<u>2860</u>	1474	2880
471.omnetpp	192	844	1420	849	1410	<u>847</u>	<u>1420</u>	192	737	1630	<u>734</u>	<u>1630</u>	734	1630
473.astar	192	733	1840	737	1830	<u>734</u>	<u>1840</u>	192	695	1940	691	1950	<u>693</u>	<u>1940</u>
483.xalanbmk	192	<u>609</u>	<u>2170</u>	613	2160	606	2190	192	558	2370	556	2380	<u>558</u>	<u>2370</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler updated to November 2012 PTF
Version: 12.01.0000.0002
Fortran compiler updated to November 2012 PTF
Version: 14.01.0000.0002

Peak Tuning Notes

400.perlbench fdpr options: -O4 -cbpth -1 -sdp -1
401.bzip2 fdpr options: -O4 -vrox -nobldcg -sdp -1
403.gcc fdpr options: -O4 -cbpth -1 -sdp -1
429.mcf fdpr options: -O2
445.gobmk fdpr options: -O3
456.hmmmer fdpr options: -O3 -bldcg -ccc 10
458.sjeng fdpr options: -O3
464.h264ref fdpr options: -O4 -sdp -1 -vrox -lu -1
473.astar fdpr options: -O3 -vrox -bldcg
483.xalanbmk fdpr options: -O3 -bldcg -lu -1 -lux 1

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2800

IBM Power 770 (4.2 GHz, 48 core)

SPECint_rate_base2006 = 2170

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

Operating System Notes

AIX updated to V7.1 TL 2

All ulimits set to unlimited.

19200 16M large pages defined with vmo command

Platform Notes

Service Processor Memory Mirroring Property Disabled

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY_AFFINITY = "MCM"

XLFRTEOPTS = "intrinths=1"

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX

462.libquantum: -DSPEC_CPU_AIX

464.h264ref: -DSPEC_CPU_AIX -qchars=signed

483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnvoll

-D_ILS_MACROS -qalias=noansi -qalloca -blpdata

C++ benchmarks:

-qipa=threads -bmaxdata:0x20000000 -qlargepage -O4 -D_ILS_MACROS

-qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2800

IBM Power 770 (4.2 GHz, 48 core)

SPECint_rate_base2006 = 2170

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

Base Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -D_ILS_MACROS -qalias=noansi
-blpdata -btextpsize:64K

401.bz2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qalloca
-blpdata -btextpsize:64K

429.mcf: basepeak = yes

445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K

456.hmmer: -qipa=threads -O5 -qsimd -qvecnv01 -qassert=refalign
-D_ILS_MACROS -blpdata -btextpsize:64K

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2800

IBM Power 770 (4.2 GHz, 48 core)

SPECint_rate_base2006 = 2170

CPU2006 license: 11

Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

Peak Optimization Flags (Continued)

458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4
-D_ILS_MACROS -blpdata -btextpsize:64K

462.libquantum: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64
-qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K

464.h264ref: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvml -D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O4 -qsimd -qvecnvml -D_ILS_MACROS
-qalign=natural -qrtti=all -qinlglue
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qinlglue
-qalign=natural -blpdata -btextpsize:64K

483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage
-D_ILS_MACROS -qinlglue -D__IBM_FAST_VECTOR -blpdata
-btextpsize:64K

Peak Other Flags

C benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

400.perlbench: -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 2800

IBM Power 770 (4.2 GHz, 48 core)

SPECint_rate_base2006 = 2170

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:42:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 October 2012.