



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 2280

IBM Power 770 (4.2 GHz, 48 core)

SPECfp_rate_base2006 = 2000

CPU2006 license: 11


Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

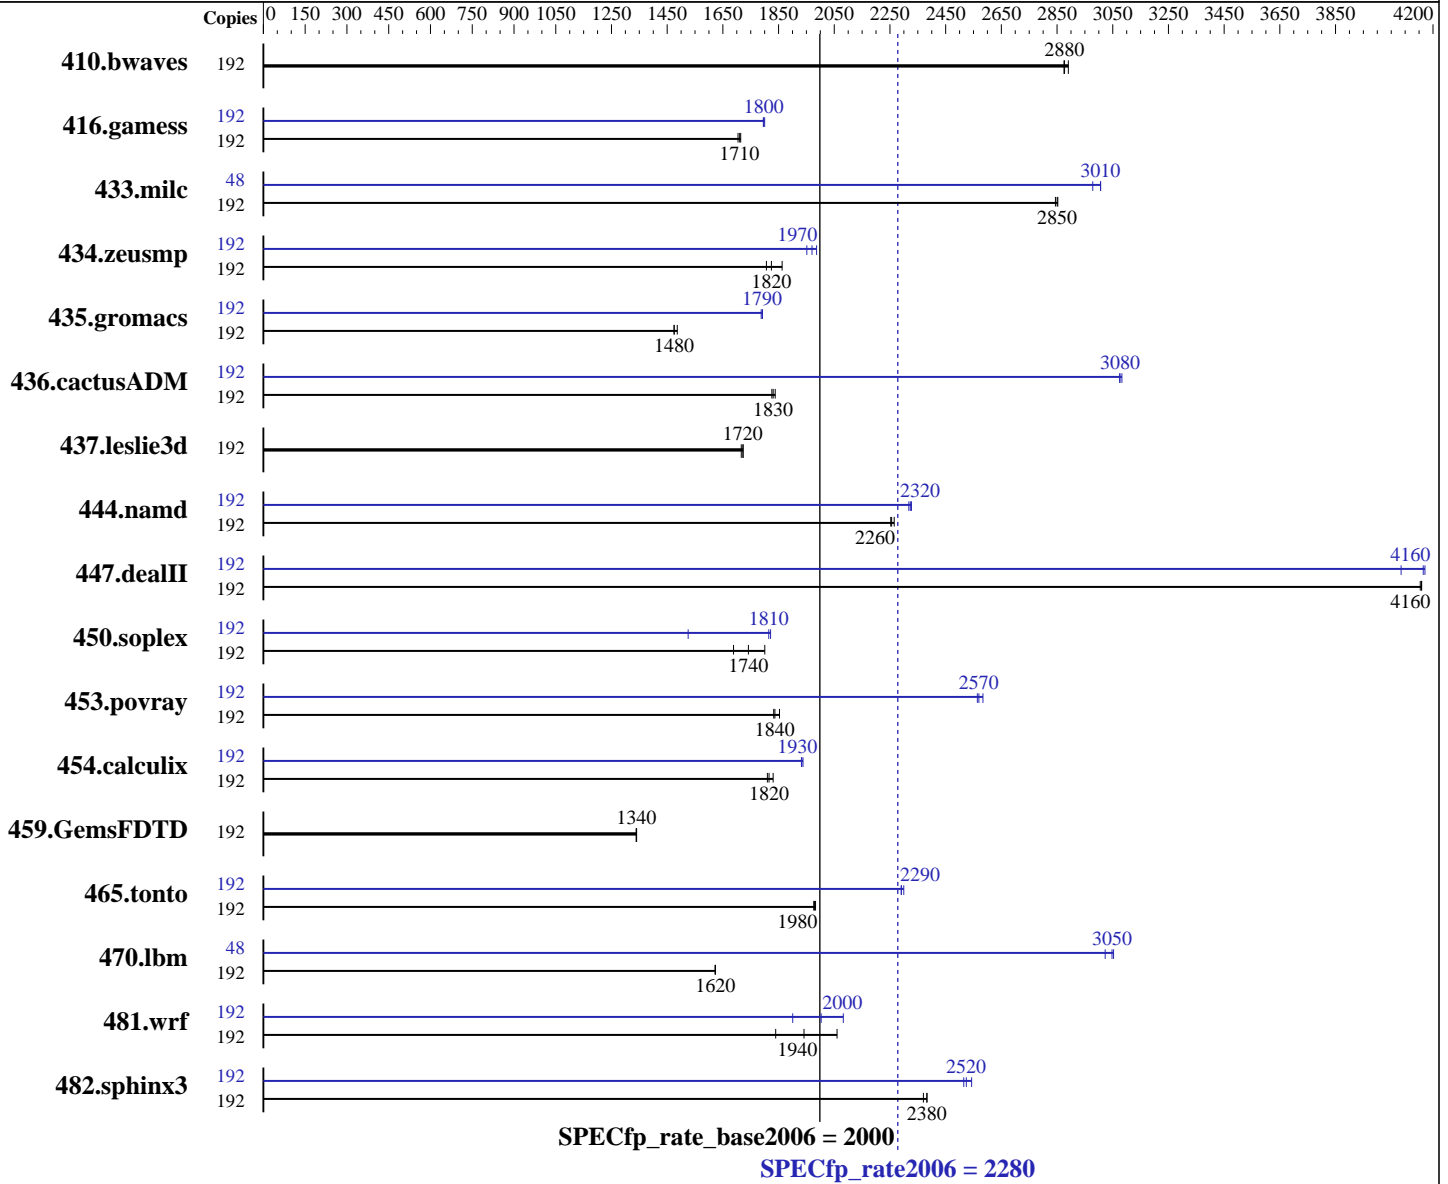

Hardware

CPU Name: POWER7+
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.396 GHz
 CPU MHz: 4228
 FPU: Integrated
 CPU(s) enabled: 48 cores, 16 chips, 3 cores/chip, 4 threads/core
 CPU(s) orderable: 12,24,36,48 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core

Software

Operating System: IBM AIX V7.1
 Compiler: C/C++: Version 12.1 of IBM XL C/C++ for AIX; Fortran: Version 14.1 of IBM XL Fortran for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2280

IBM Power 770 (4.2 GHz, 48 core)

SPECfp_rate_base2006 = 2000

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per core
 Other Cache: None
 Memory: 512 GB (64 x 8 GB) DDR3 1066 MHz
 Disk Subsystem: 8 x 146.8 GB 15K RPM Raid0 SFF SAS
 Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	192	908	2870	903	2890	907	2880	192	908	2870	903	2890	907	2880
416.gamess	192	2198	1710	2206	1700	2193	1710	192	2094	1800	2088	1800	2092	1800
433.milc	192	618	2850	620	2840	618	2850	48	147	3010	148	2980	147	3010
434.zeusmp	192	938	1860	958	1820	967	1810	192	895	1950	887	1970	880	1990
435.gromacs	192	929	1480	930	1470	922	1490	192	765	1790	767	1790	765	1790
436.cactusADM	192	1257	1830	1253	1830	1248	1840	192	744	3080	746	3080	746	3070
437.leslie3d	192	1048	1720	1052	1720	1048	1720	192	1048	1720	1052	1720	1048	1720
444.namd	192	683	2260	684	2250	680	2270	192	664	2320	662	2330	663	2320
447.dealII	192	528	4160	528	4160	529	4150	192	538	4090	527	4160	527	4170
450.soplex	192	889	1800	948	1690	919	1740	192	1050	1530	882	1810	879	1820
453.povray	192	551	1850	557	1830	556	1840	192	398	2560	398	2570	395	2580
454.calculix	192	872	1820	875	1810	865	1830	192	817	1940	820	1930	819	1930
459.GemsFDTD	192	1522	1340	1520	1340	1520	1340	192	1522	1340	1520	1340	1520	1340
465.tonto	192	955	1980	953	1980	956	1980	192	822	2300	825	2290	825	2290
470.lbm	192	1625	1620	1625	1620	1626	1620	48	216	3050	216	3050	218	3020
481.wrf	192	1105	1940	1166	1840	1041	2060	192	1128	1900	1071	2000	1030	2080
482.sphinx3	192	1571	2380	1570	2380	1579	2370	192	1488	2510	1471	2540	1482	2520

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler updated to November 2012 PTF

Version: 12.01.0000.0002

Fortran compiler updated to November 2012 PTF

Version: 14.01.0000.0002

Peak Tuning Notes

416.gamess fdpr options: -O4 -cbpth -1 -sdp -1

433.milc fdpr options: -O3 -lu -1

435.gromacs fdpr options: -O

436.cactusADM fdpr options: -O3 -lu -1 -nodp -sdp 9

437.leslie3d fdpr options: -O3

453.povray fdpr options: -O3 -cbpth -1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2280

IBM Power 770 (4.2 GHz, 48 core)

SPECfp_rate_base2006 = 2000

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

Peak Tuning Notes (Continued)

```
459.GemsFDTD fdpr options: -O3 -cbpth -1
465.tonto fdpr options: -O4
482.sphinx3 fdpr options: -O4 -rcctf 0 -sdp 9 -vrox
```

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

```
AIX updated to V7.1 TL 2
All ulimits set to unlimited.
19200 16M large pages defined with vmo command
```

Platform Notes

Service Processor Memory Mirroring Property Disabled

General Notes

Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"

Base Compiler Invocation

```
C benchmarks:
  /usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:
  /usr/vacpp/bin/xlC

Fortran benchmarks:
  /usr/bin/xlf95

Benchmarks using both Fortran and C:
  /usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2280

IBM Power 770 (4.2 GHz, 48 core)

SPECfp_rate_base2006 = 2000

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

Base Portability Flags

```
410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-qipa=threads -bmaxdata:0x40000000 -qlargepage -O5 -D_ILS_MACROS
-blpdata
```

C++ benchmarks:

```
-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnv1
-D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5 -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2280

IBM Power 770 (4.2 GHz, 48 core)

SPECfp_rate_base2006 = 2000

CPU2006 license: 11

Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -qipa=threads -bmaxdata:0x40000000 -O5 -qlargepage
-D_ILS_MACROS -qprefetch=aggressive -qalign=natural
-blpdata -btextpsize:64K

470.lbm: -qipa=threads -bmaxdata:0x30000000 -O5 -D_ILS_MACROS
-blpdata -btextpsize:64K

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

444.namd: -qipa=threads -O4 -q64 -qlargepage -D_ILS_MACROS
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
-btextpsize:64K

447.dealIII: -qipa=threads -bmaxdata:0x50000000 -O5 -qsimd -qvecnv01
-D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2280

IBM Power 770 (4.2 GHz, 48 core)

SPECfp_rate_base2006 = 2000

CPU2006 license: 11

Test date: Sep-2012

Test sponsor: IBM Corporation

Hardware Availability: Oct-2012

Tested by: IBM Corporation

Software Availability: Nov-2012

Peak Optimization Flags (Continued)

450.soplex: -qipa=threads -bmaxdata:0x40000000 -O5 -qsimd -qvecnv1
-D_ILS_MACROS -D__IBM_FAST_VECTOR
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

453.povray: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-qvecnv1 -qlargepage -D_ILS_MACROS -qalign=natural
-blpdata -btextpsize:64K

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -qipa=threads -bmaxdata:0x40000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qarch=pwr5 -qlargepage -qalias=nostd
-blpdata -btextpsize:64K

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qxlf90=nosignedzero
-blpdata -btextpsize:64K

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnv1 -blpdata
-btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -blpdata -btextpsize:64K

436.cactusADM: -qipa=threads -bmaxdata:0x60000000 -O4 -qsimd -qvecnv1
-D_ILS_MACROS -qnostrict -blpdata -btextpsize:64K

454.calculix: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnv1 -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

481.wrf: -qipa=threads -bmaxdata:0x30000000 -O5 -qsimd -qvecnv1
-D_ILS_MACROS -blpdata -btextpsize:64K



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 2280

IBM Power 770 (4.2 GHz, 48 core)

SPECfp_rate_base2006 = 2000

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2012

Hardware Availability: Oct-2012

Software Availability: Nov-2012

Peak Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

450.soplex: -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

434.zeusmp: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

481.wrf: -qsuppress=1500-010 -qsupddress=cmpmsg -qsupddress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:45:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 October 2012.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7