



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp[®]_rate2006 = 399

Cisco UCS B200 M3(Intel Xeon E5-2658, 2.10 GHz)

SPECfp_rate_base2006 = 392

CPU2006 license: 9019


Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Jul-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

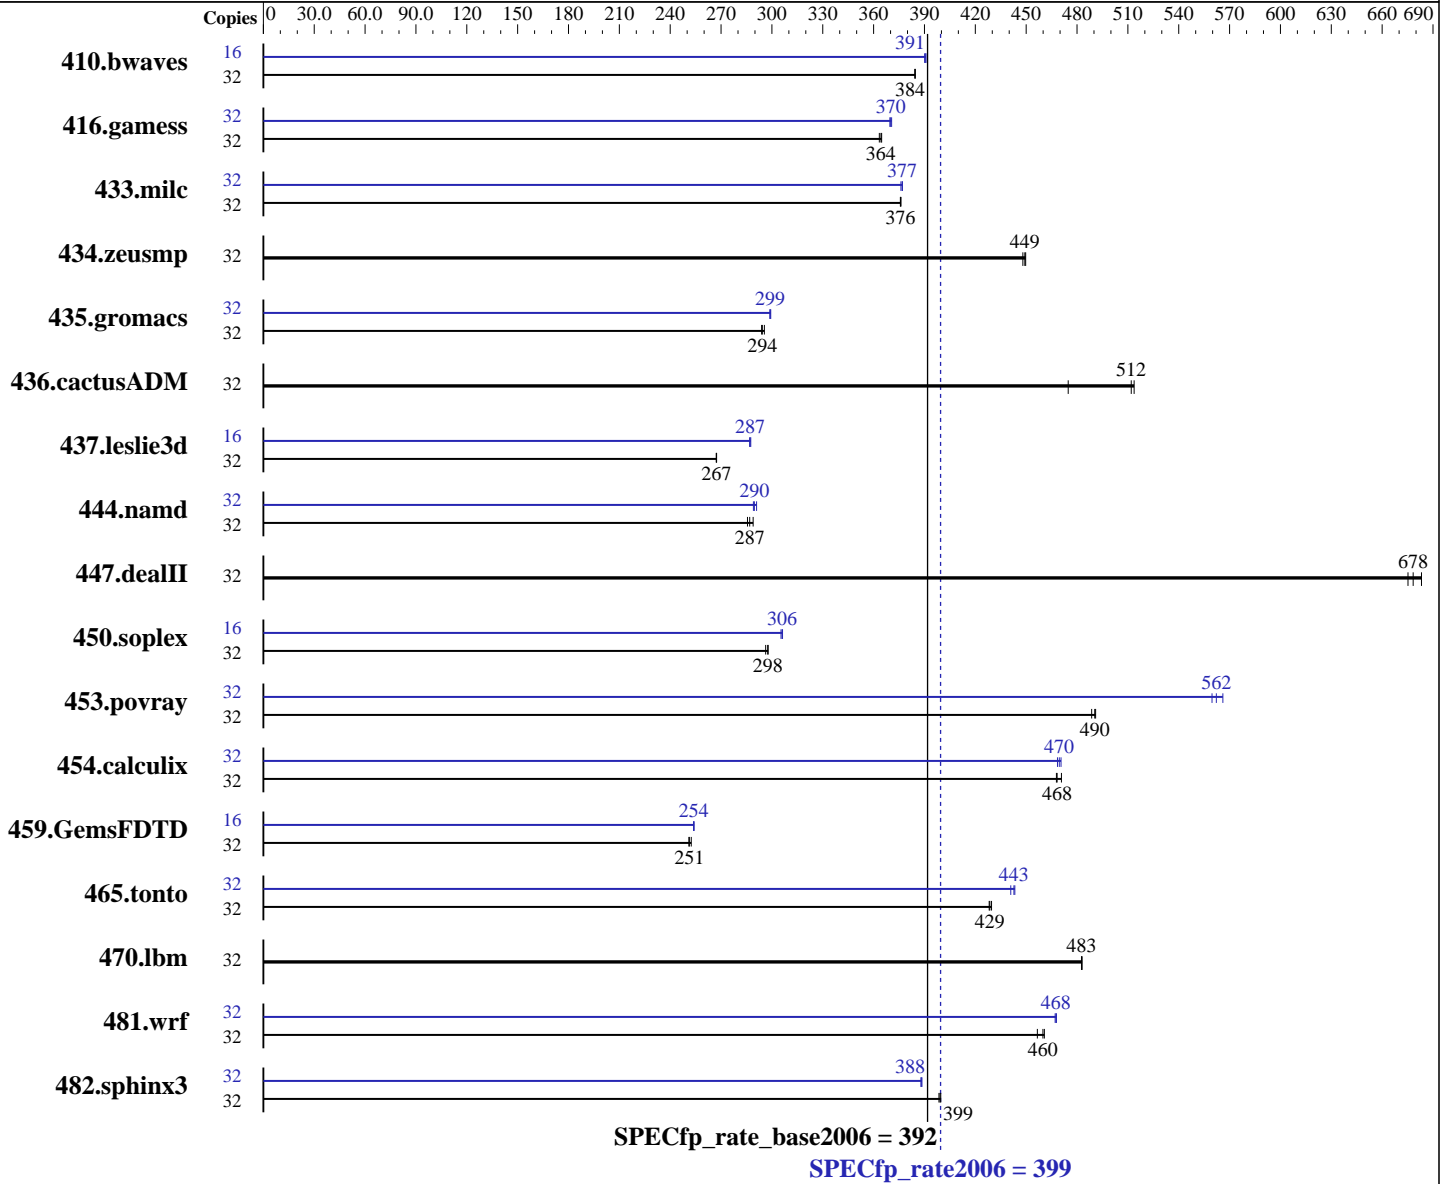

Hardware

CPU Name: Intel Xeon E5-2658
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 399

Cisco UCS B200 M3(Intel Xeon E5-2658, 2.10 GHz)

SPECfp_rate_base2006 = 392

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Jul-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 X 600 GB 10000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<u>1131</u>	<u>384</u>	1131	384	1131	385	16	557	390	556	391	<u>556</u>	<u>391</u>
416.gamess	32	1724	363	1718	365	<u>1720</u>	<u>364</u>	32	1695	370	<u>1693</u>	<u>370</u>	1691	371
433.milc	32	<u>781</u>	<u>376</u>	782	376	781	376	32	781	376	779	377	<u>780</u>	<u>377</u>
434.zeusmp	32	<u>648</u>	<u>449</u>	648	450	650	448	32	<u>648</u>	<u>449</u>	648	450	650	448
435.gromacs	32	773	296	777	294	<u>776</u>	<u>294</u>	32	<u>764</u>	<u>299</u>	763	299	765	299
436.cactusADM	32	<u>747</u>	<u>512</u>	744	514	805	475	32	<u>747</u>	<u>512</u>	744	514	805	475
437.leslie3d	32	1126	267	1125	267	<u>1125</u>	<u>267</u>	16	524	287	<u>524</u>	<u>287</u>	523	288
444.namd	32	899	286	888	289	<u>895</u>	<u>287</u>	32	<u>886</u>	<u>290</u>	888	289	882	291
447.dealII	32	536	683	542	675	<u>540</u>	<u>678</u>	32	536	683	542	675	<u>540</u>	<u>678</u>
450.soplex	32	896	298	901	296	<u>897</u>	<u>298</u>	16	437	305	<u>436</u>	<u>306</u>	436	306
453.povray	32	347	491	348	489	<u>347</u>	<u>490</u>	32	301	566	304	560	<u>303</u>	<u>562</u>
454.calculix	32	561	471	564	468	<u>564</u>	<u>468</u>	32	<u>562</u>	<u>470</u>	564	468	561	471
459.GemsFDTD	32	1353	251	1345	252	<u>1351</u>	<u>251</u>	16	668	254	<u>669</u>	<u>254</u>	669	254
465.tonto	32	735	428	733	430	<u>735</u>	<u>429</u>	32	<u>711</u>	<u>443</u>	714	441	710	443
470.lbm	32	911	483	<u>911</u>	<u>483</u>	910	483	32	911	483	<u>911</u>	<u>483</u>	910	483
481.wrf	32	<u>777</u>	<u>460</u>	776	461	783	457	32	<u>764</u>	<u>468</u>	765	467	764	468
482.sphinx3	32	1565	399	1561	400	<u>1562</u>	<u>399</u>	32	1605	389	<u>1607</u>	<u>388</u>	1608	388

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
Processor C6 Report set to Disabled
Processor ClE set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 399

Cisco UCS B200 M3(Intel Xeon E5-2658, 2.10 GHz)

SPECfp_rate_base2006 = 392

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Jul-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Platform Notes (Continued)

```

CPU Performance set to HPC
LV DDR Mode set to Performance-mode
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Wed Oct 10 23:04:48 2012

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2658 0 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 8
  siblings     : 16
  physical 0:  cores 0 1 2 3 4 5 6 7
  physical 1:  cores 0 1 2 3 4 5 6 7
cache size     : 20480 KB

```

```

From /proc/meminfo
MemTotal:      132099952 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 10 23:04

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      550G  9.9G  512G   2% /

```

```

Additional information from dmidecode:
Memory:
16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 399

Cisco UCS B200 M3(Intel Xeon E5-2658, 2.10 GHz)

SPECfp_rate_base2006 = 392

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Jul-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Intel HT Technology=enable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 399

Cisco UCS B200 M3(Intel Xeon E5-2658, 2.10 GHz)

SPECfp_rate_base2006 = 392

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Jul-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.deallI: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 399

Cisco UCS B200 M3(Intel Xeon E5-2658, 2.10 GHz)

SPECfp_rate_base2006 = 392

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Jul-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
 -opt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 399

Cisco UCS B200 M3(Intel Xeon E5-2658, 2.10 GHz)

SPECfp_rate_base2006 = 392

CPU2006 license: 9019

Test date: Oct-2012

Test sponsor: Cisco Systems

Hardware Availability: Jul-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:04:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 November 2012.