



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4620)

**SPECint\_rate2006 = 980**

**SPECint\_rate\_base2006 = 941**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Oct-2012

**Hardware Availability:** Oct-2012

**Software Availability:** Jun-2012

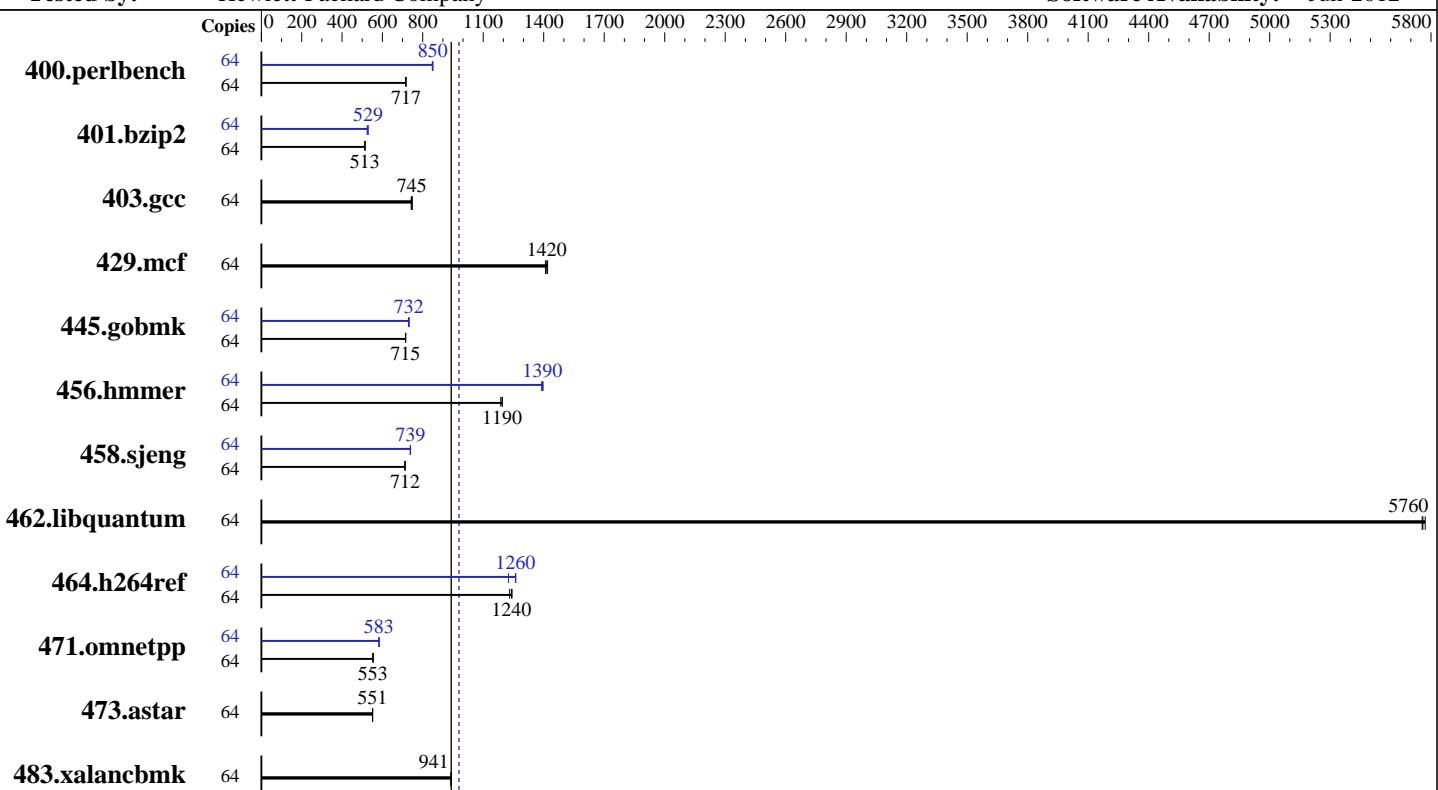

**SPECint\_rate\_base2006 = 941**

**SPECint\_rate2006 = 980**

### Hardware

CPU Name: Intel Xeon E5-4620  
CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 16 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 2 x 300 GB 10 K SAS, RAID 1  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3, (Santiago) 2.6.32-279.el6.x86\_64  
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V9.01  
HP Array Configuration Utility CLI 9.0-16.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4620)

**SPECint\_rate2006 = 980**

**SPECint\_rate\_base2006 = 941**

CPU2006 license: 3

Test date: Oct-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2012

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	874	716	<b>872</b>	<b>717</b>	872	717	64	738	848	735	850	<b>736</b>	<b>850</b>
401.bzip2	64	1204	513	1201	514	<b>1203</b>	<b>513</b>	64	1178	524	1168	529	<b>1168</b>	<b>529</b>
403.gcc	64	693	743	688	748	<b>691</b>	<b>745</b>	64	693	743	688	748	<b>691</b>	<b>745</b>
429.mcf	64	414	1410	411	1420	<b>412</b>	<b>1420</b>	64	414	1410	411	1420	<b>412</b>	<b>1420</b>
445.gobmk	64	<b>939</b>	<b>715</b>	940	714	938	716	64	<b>917</b>	<b>732</b>	920	729	916	733
456.hammer	64	503	1190	<b>500</b>	<b>1190</b>	500	1190	64	<b>428</b>	<b>1390</b>	427	1400	430	1390
458.sjeng	64	1088	712	<b>1087</b>	<b>712</b>	1087	713	64	1049	738	1047	740	<b>1048</b>	<b>739</b>
462.libquantum	64	230	5770	<b>230</b>	<b>5760</b>	230	5760	64	230	5770	<b>230</b>	<b>5760</b>	230	5760
464.h264ref	64	<b>1142</b>	<b>1240</b>	1139	1240	1150	1230	64	1156	1230	<b>1124</b>	<b>1260</b>	1122	1260
471.omnetpp	64	721	554	723	553	<b>723</b>	<b>553</b>	64	687	582	<b>686</b>	<b>583</b>	684	584
473.astar	64	814	552	<b>815</b>	<b>551</b>	815	551	64	814	552	<b>815</b>	<b>551</b>	815	551
483.xalancbmk	64	<b>469</b>	<b>941</b>	469	941	469	941	64	<b>469</b>	<b>941</b>	469	941	469	941

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Drive Write Cache set to Enabled in HP Array Configuration Utility,  
CLI version 9.0-16.0  
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write  
in HP Array Configuration Utility, CLI version 9.0-16.0

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Custom  
Thermal Configuration set to Maximum Cooling  
Memory Power Savings Mode set to Maximum Performance

Sysinfo program /cpu2006/config/sysinfo.rev6800  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4620)

**SPECint\_rate2006 = 980**

**SPECint\_rate\_base2006 = 941**

**CPU2006 license:** 3

**Test date:** Oct-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Oct-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2012

## Platform Notes (Continued)

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on BL660c-GHR Tue Oct 23 15:00:04 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4620 0 @ 2.20GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 8
    siblings   : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
    physical 2: cores 0 1 2 3 4 5 6 7
    physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB
```

```
From /proc/meminfo
MemTotal:       264485280 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux BL660c-GHR 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 23 14:45
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  273G  14G  246G   6%  /
```

Additional information from dmidecode:

```
BIOS HP I32 08/20/2012
Memory:
 32x HP Not Specified 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4620)

**SPECint\_rate2006 = 980**

**SPECint\_rate\_base2006 = 941**

CPU2006 license: 3

Test date: Oct-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2012

Tested by: Hewlett-Packard Company

Software Availability: Jun-2012

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/cpu2006/libss2/32:/cpu2006/libss2/64"

Binaries compiled on a system with 2x Xeon E5-2667 CPU + 256GB  
memory using SLES11 SP2, RC3

## Base Compiler Invocation

C benchmarks:

  icc -m32

C++ benchmarks:

  icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  -Wl,-z,muldefs -L/spec/libss2/32 -lsmartheap

## Base Other Flags

C benchmarks:

  403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

  icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4620)

**SPECint\_rate2006 = 980**

**SPECint\_rate\_base2006 = 941**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2012

Hardware Availability: Oct-2012

Software Availability: Jun-2012

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4\_2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4\_2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen8  
(2.20 GHz, Intel Xeon E5-4620)

**SPECint\_rate2006 = 980**

**SPECint\_rate\_base2006 = 941**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2012

**Hardware Availability:** Oct-2012

**Software Availability:** Jun-2012

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/spec/libs2/32 -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:07:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 November 2012.