



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECint®\_rate2006 = 986

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECint\_rate\_base2006 = 952

CPU2006 license: 9019


Test date: Nov-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

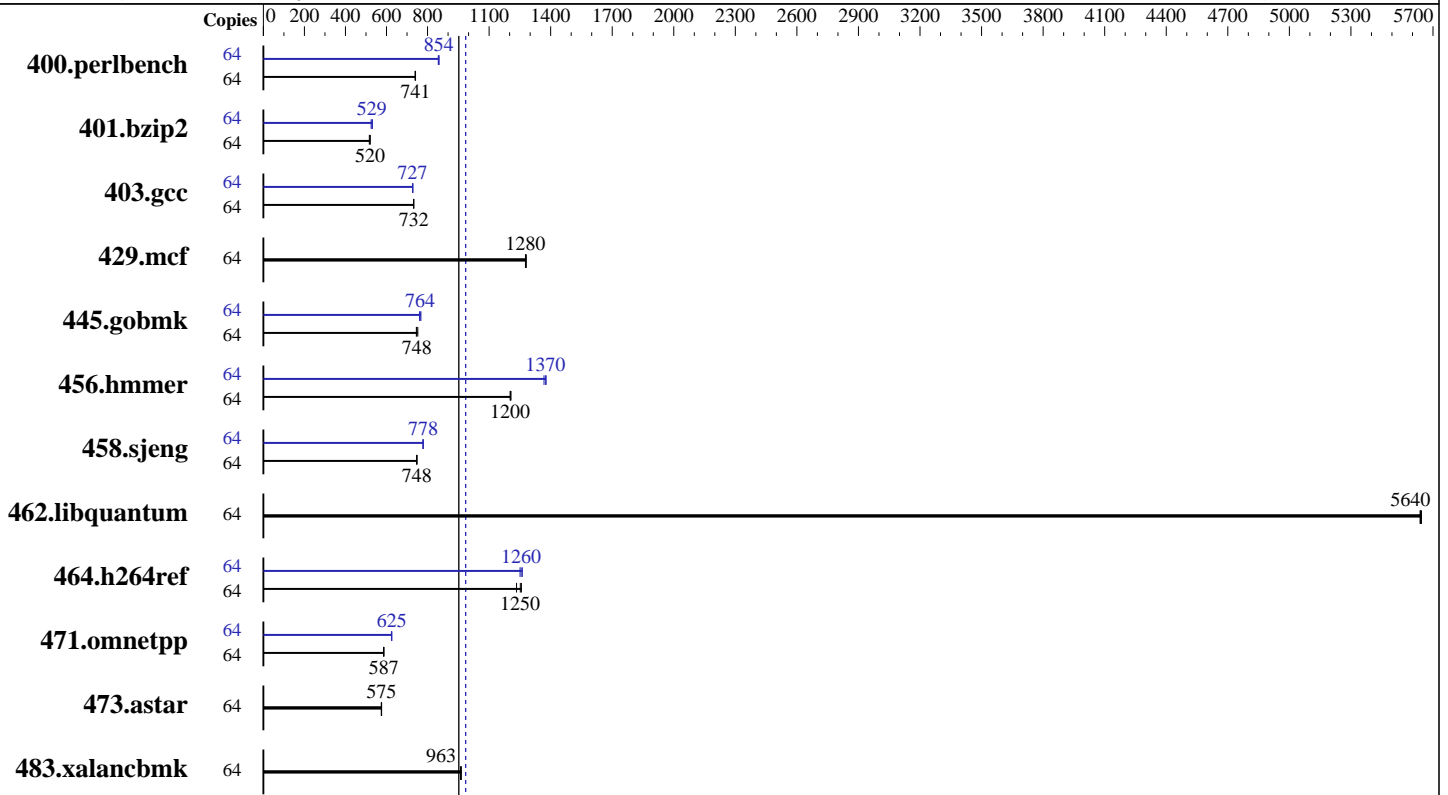

SPECint\_rate2006 = 986

SPECint\_rate\_base2006 = 952

### Hardware

CPU Name: Intel Xeon E5-4620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 16 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 X 300 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECint\_rate2006 = 986

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECint\_rate\_base2006 = 952

CPU2006 license: 9019

Test date: Nov-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	843	741	<b>843</b>	<b>741</b>	846	739	64	734	852	730	856	<b>732</b>	<b>854</b>
401.bzip2	64	<b>1188</b>	<b>520</b>	1196	516	1187	520	64	1176	525	1162	531	<b>1167</b>	<b>529</b>
403.gcc	64	704	732	703	733	<b>703</b>	<b>732</b>	64	708	727	707	729	<b>708</b>	<b>727</b>
429.mcf	64	<b>457</b>	<b>1280</b>	456	1280	457	1280	64	<b>457</b>	<b>1280</b>	456	1280	457	1280
445.gobmk	64	<b>898</b>	<b>748</b>	892	753	901	746	64	874	768	<b>879</b>	<b>764</b>	882	761
456.hammer	64	496	1200	<b>496</b>	<b>1200</b>	495	1210	64	437	1370	433	1380	<b>434</b>	<b>1370</b>
458.sjeng	64	1037	747	<b>1035</b>	<b>748</b>	1035	748	64	995	778	994	779	<b>995</b>	<b>778</b>
462.libquantum	64	235	5640	235	5640	<b>235</b>	<b>5640</b>	64	235	5640	235	5640	<b>235</b>	<b>5640</b>
464.h264ref	64	<b>1131</b>	<b>1250</b>	1126	1260	1148	1230	64	1132	1250	1122	1260	<b>1127</b>	<b>1260</b>
471.omnetpp	64	683	585	681	587	<b>681</b>	<b>587</b>	64	<b>640</b>	<b>625</b>	641	624	639	626
473.astar	64	781	575	780	576	<b>781</b>	<b>575</b>	64	781	575	780	576	<b>781</b>	<b>575</b>
483.xalancbmk	64	<b>459</b>	<b>963</b>	460	961	458	965	64	<b>459</b>	<b>963</b>	460	961	458	965

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```

BIOS Configuration:
Hyper-Threading set to Enabled
Processor C6 Report set to Disabled
Processor C1E set to Disabled
CPU Performance set to HPC
LV DDR Mode set to Performance-mode
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Wed Nov 7 06:49:56 2012

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4620 0 @ 2.20GHz
4 "physical id"s (chips)

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 986

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECint\_rate\_base2006 = 952

CPU2006 license: 9019

Test date: Nov-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Platform Notes (Continued)

```

64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB

From /proc/meminfo
MemTotal:      264502052 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 7 06:42

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda1       ext4      275G  9.9G  251G   4% /

Additional information from dmidecode:
Memory:
32x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL6.2  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 986

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECint\_rate\_base2006 = 952

CPU2006 license: 9019

Test date: Nov-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 986

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECint\_rate\_base2006 = 952

CPU2006 license: 9019

Test date: Nov-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 986

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECint\_rate\_base2006 = 952

CPU2006 license: 9019

Test date: Nov-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:36:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 December 2012.