



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint<sup>®</sup>\_rate2006 = 106

Express5800/E110d-M (Intel Xeon E5-2407)

SPECint\_rate\_base2006 = 102

CPU2006 license: 9006


Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

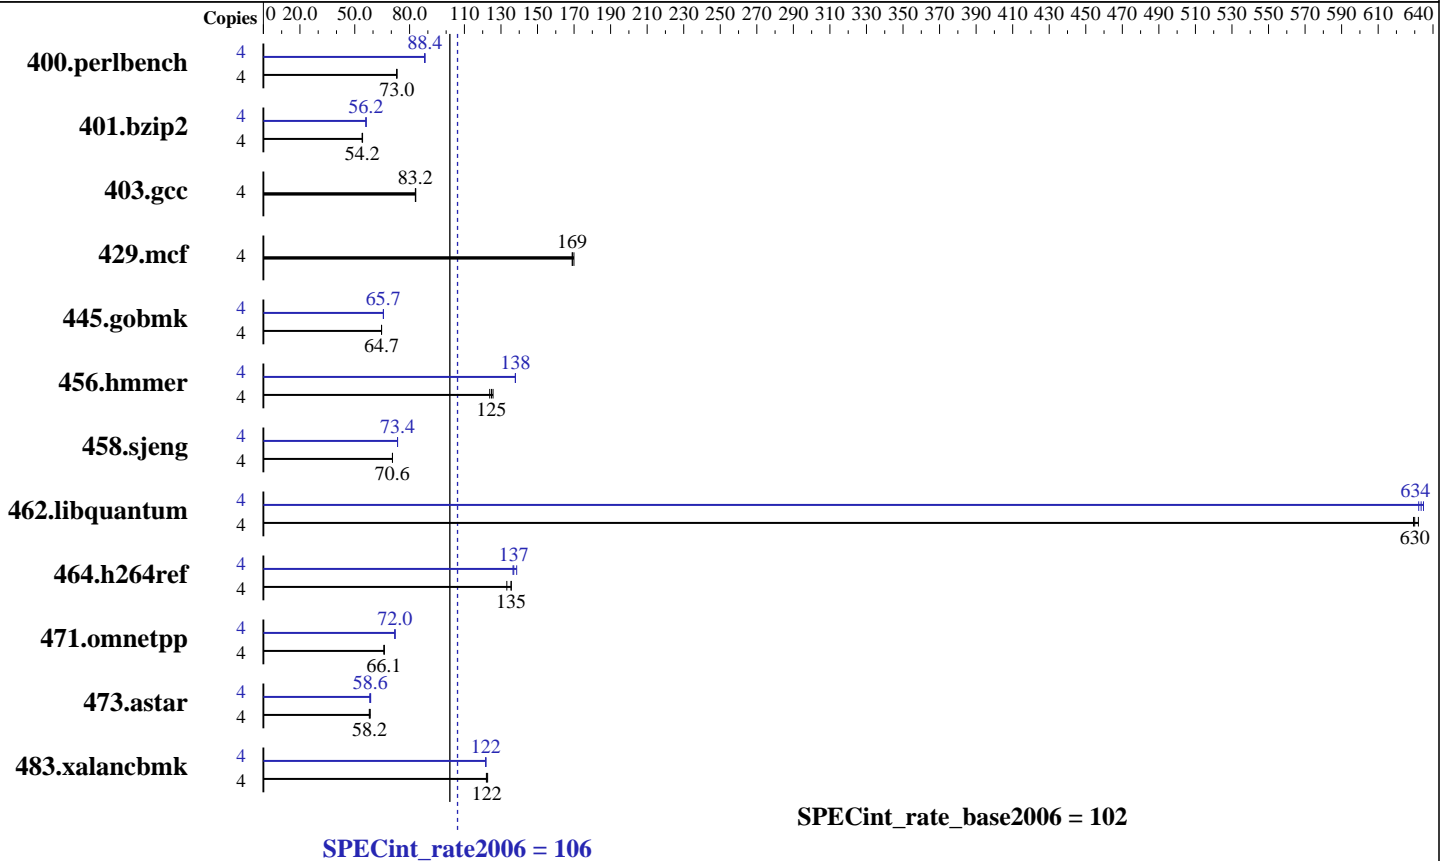

### Hardware

CPU Name: Intel Xeon E5-2407  
 CPU Characteristics:  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz and CL7)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint\_rate2006 = 106

Express5800/E110d-M (Intel Xeon E5-2407)

SPECint\_rate\_base2006 = 102

CPU2006 license: 9006

Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	536	73.0	535	73.0	<u>535</u>	<u>73.0</u>	4	<u>442</u>	<u>88.4</u>	442	88.4	443	88.2
401.bzip2	4	714	54.1	711	54.3	<u>713</u>	<u>54.2</u>	4	687	56.2	687	56.2	<u>687</u>	<u>56.2</u>
403.gcc	4	386	83.4	387	83.2	<u>387</u>	<u>83.2</u>	4	386	83.4	387	83.2	<u>387</u>	<u>83.2</u>
429.mcf	4	<u>216</u>	<u>169</u>	215	170	216	169	4	<u>216</u>	<u>169</u>	215	170	216	169
445.gobmk	4	649	64.7	<u>649</u>	<u>64.7</u>	649	64.6	4	<u>639</u>	<u>65.7</u>	639	65.7	638	65.7
456.hammer	4	301	124	297	126	<u>299</u>	<u>125</u>	4	271	138	271	138	<u>271</u>	<u>138</u>
458.sjeng	4	<u>685</u>	<u>70.6</u>	685	70.7	685	70.6	4	659	73.4	<u>659</u>	<u>73.4</u>	659	73.4
462.libquantum	4	131	632	132	629	<u>132</u>	<u>630</u>	4	131	632	<u>131</u>	<u>634</u>	131	635
464.h264ref	4	652	136	<u>653</u>	<u>135</u>	665	133	4	639	139	648	137	<u>646</u>	<u>137</u>
471.omnetpp	4	379	66.0	<u>378</u>	<u>66.1</u>	378	66.2	4	347	72.1	<u>347</u>	<u>72.0</u>	348	71.9
473.astar	4	481	58.4	485	57.9	<u>482</u>	<u>58.2</u>	4	<u>479</u>	<u>58.6</u>	482	58.2	478	58.7
483.xalancbmk	4	226	122	225	123	<u>226</u>	<u>122</u>	4	227	122	<u>227</u>	<u>122</u>	227	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 106

Express5800/E110d-M (Intel Xeon E5-2407)

SPECint\_rate\_base2006 = 102

CPU2006 license: 9006

Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 106

Express5800/E110d-M (Intel Xeon E5-2407)

SPECint\_rate\_base2006 = 102

CPU2006 license: 9006

Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: -xAVX -ipo -O3 -no-prec-div -opt-prefetch  
 -opt-mem-layout-trans=3

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/opt/SmartHeap\_8.1/lib -lsmarheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch  
 -opt-mem-layout-trans=3 -Wl,-z,muldefs  
 -L/opt/SmartHeap\_8.1/lib -lsmarheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 106

Express5800/E110d-M (Intel Xeon E5-2407)

SPECint\_rate\_base2006 = 102

CPU2006 license: 9006

Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

483.xalancbmk: Same as 473.astar

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:38:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 April 2013.