



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon I620-G10 (Intel Xeon E5-2650)

SPECfp®\_rate2006 = 430

SPECfp\_rate\_base2006 = 419

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

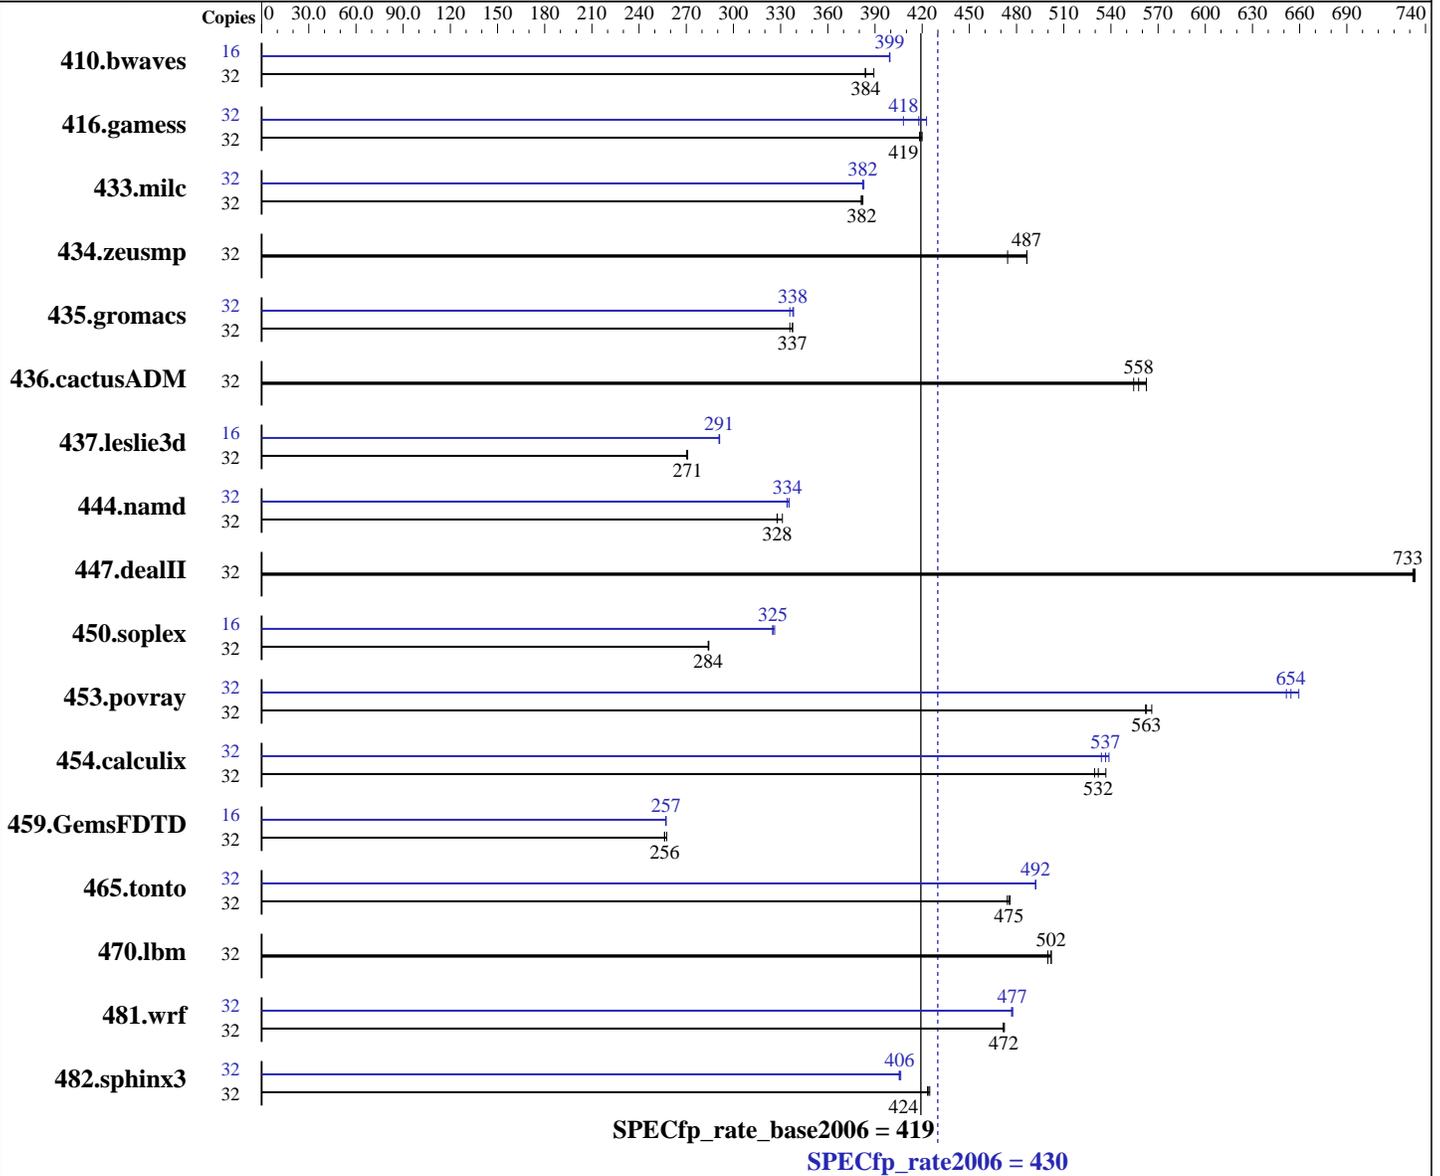

### Hardware

CPU Name: Intel Xeon E5-2650  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sugon

## I620-G10 (Intel Xeon E5-2650)

SPECfp\_rate2006 = **430**

SPECfp\_rate\_base2006 = 419

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (Full multiuser with network)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1117	389	<u>1132</u>	<u>384</u>	1133	384	16	<u>545</u>	<u>399</u>	544	400	545	399
416.gamess	32	<u>1495</u>	<u>419</u>	1492	420	1498	418	32	<u>1500</u>	<u>418</u>	1482	423	1536	408
433.milc	32	<u>770</u>	<u>382</u>	771	381	768	382	32	769	382	<u>769</u>	<u>382</u>	767	383
434.zeusmp	32	598	487	<u>599</u>	<u>487</u>	614	474	32	598	487	<u>599</u>	<u>487</u>	614	474
435.gromacs	32	680	336	677	338	<u>677</u>	<u>337</u>	32	676	338	<u>676</u>	<u>338</u>	680	336
436.cactusADM	32	680	563	690	554	<u>686</u>	<u>558</u>	32	680	563	690	554	<u>686</u>	<u>558</u>
437.leslie3d	32	<u>1111</u>	<u>271</u>	1113	270	1110	271	16	517	291	<u>517</u>	<u>291</u>	516	291
444.namd	32	783	328	775	331	<u>783</u>	<u>328</u>	32	765	335	768	334	<u>768</u>	<u>334</u>
447.dealII	32	500	732	499	733	<u>500</u>	<u>733</u>	32	500	732	499	733	<u>500</u>	<u>733</u>
450.soplex	32	939	284	940	284	<u>940</u>	<u>284</u>	16	409	326	<u>410</u>	<u>325</u>	411	325
453.povray	32	301	566	<u>303</u>	<u>563</u>	303	562	32	261	652	258	659	<u>260</u>	<u>654</u>
454.calculix	32	492	537	499	530	<u>496</u>	<u>532</u>	32	494	534	<u>492</u>	<u>537</u>	490	539
459.GemsFDTD	32	1318	258	1325	256	<u>1325</u>	<u>256</u>	16	<u>660</u>	<u>257</u>	660	257	661	257
465.tonto	32	662	476	<u>663</u>	<u>475</u>	664	474	32	640	492	640	492	<u>640</u>	<u>492</u>
470.lbm	32	<u>876</u>	<u>502</u>	880	500	876	502	32	<u>876</u>	<u>502</u>	880	500	876	502
481.wrf	32	<u>758</u>	<u>472</u>	757	472	758	472	32	<u>749</u>	<u>477</u>	749	478	750	477
482.sphinx3	32	<u>1470</u>	<u>424</u>	1473	423	1468	425	32	1535	406	<u>1538</u>	<u>406</u>	1538	405

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/speccpu/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on I620-G10 Wed Apr 17 01:59:27 2013

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 430

I620-G10 (Intel Xeon E5-2650)

SPECfp\_rate\_base2006 = 419

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Apr-2013  
Hardware Availability: May-2012  
Software Availability: Jun-2012

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
 physical 0: cores 0 1 2 3 4 5 6 7
 physical 1: cores 0 1 2 3 4 5 6 7
 cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132129164 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux I620-G10 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 17 01:43
```

```
SPEC is set to: /home/speccpu
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/vg_i620g10-lv_home
                ext4      1.8T      9.6G  1.7T   1% /home
```

Additional information from dmidecode:

```
Memory:
 14x Hynix Semiconducto HMT31GR7CFR4C 8 GB 1600 MHz 1 rank
 2x Hynix Semiconductor HMT31GR7CFR4C- 8 GB 1600 MHz 1 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 430

I620-G10 (Intel Xeon E5-2650)

SPECfp\_rate\_base2006 = 419

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 430

I620-G10 (Intel Xeon E5-2650)

SPECfp\_rate\_base2006 = 419

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 430

I620-G10 (Intel Xeon E5-2650)

SPECfp\_rate\_base2006 = 419

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 430

I620-G10 (Intel Xeon E5-2650)

SPECfp\_rate\_base2006 = 419

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Apr-2013

Hardware Availability: May-2012

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:34:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 May 2013.