



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-1

SPECint_rate2006 = 386

SPECint_rate_base2006 = 341

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2013

Hardware Availability: Mar-2013

Software Availability: Mar-2013

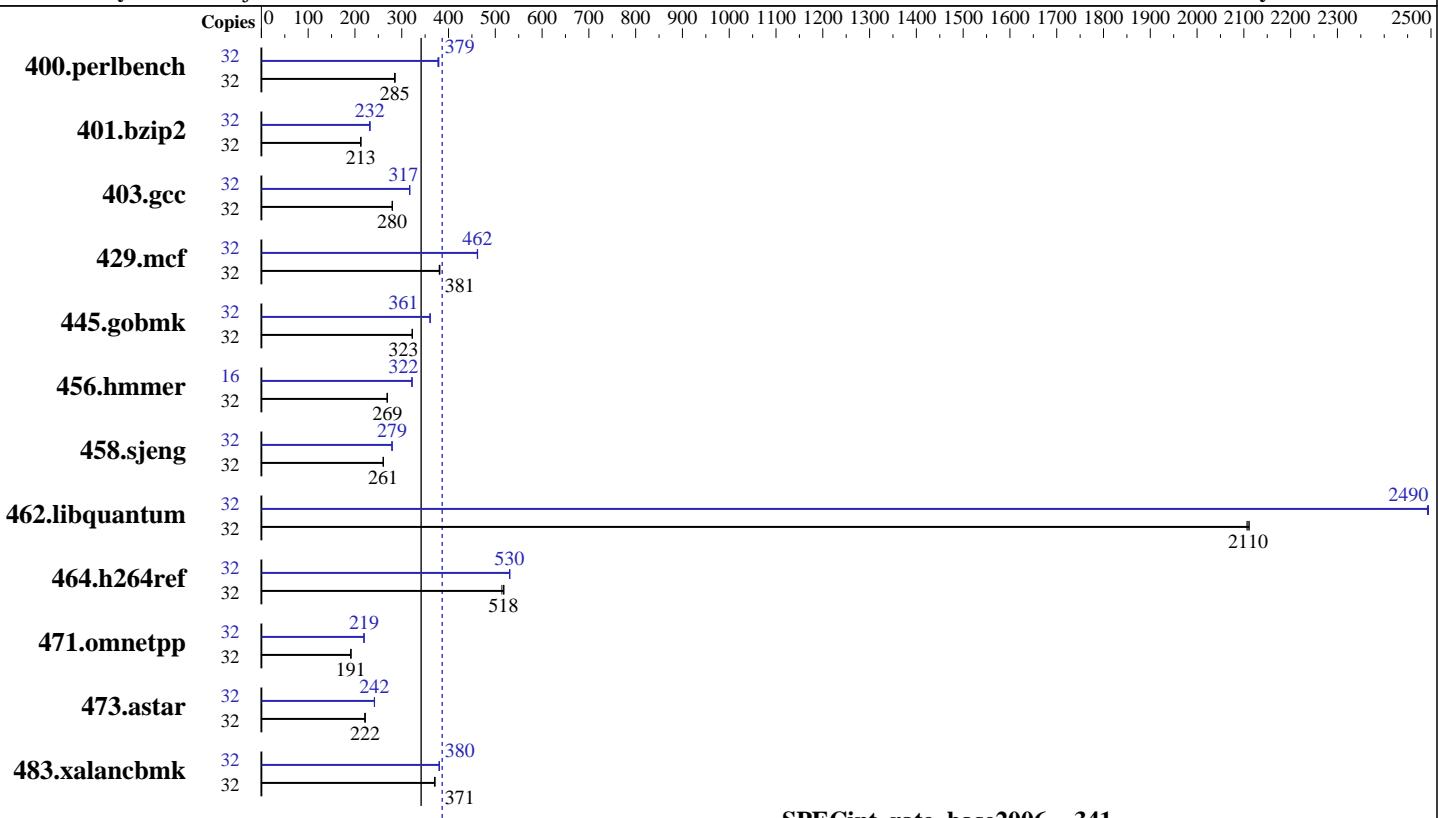

SPECint_rate_base2006 = 341

SPECint_rate2006 = 386

Hardware

CPU Name: SPARC64 X
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 16 cores, 1 chip, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 22 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1600 MHz)
 Disk Subsystem: 1 x 600 GB SAS, 10025 RPM Toshiba MBF2600RC
 Other Hardware: None

Software

Operating System: Solaris 11.1.6.4.0
 Compiler: C/C++: Version 12.3 of Oracle Solaris Studio, 1/13 Platform Specific Enhancement
 Auto Parallel: No
 File System: zfs and tmpfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-1

SPECint_rate2006 = 386

SPECint_rate_base2006 = 341

CPU2006 license: 19

Test date: Apr-2013

Test sponsor: Fujitsu

Hardware Availability: Mar-2013

Tested by: Fujitsu

Software Availability: Mar-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	1097	285	1094	286	1097	285	32	826	379	829	377	824	379
401.bzip2	32	1452	213	1453	213	1455	212	32	1331	232	1331	232	1333	232
403.gcc	32	919	280	921	280	921	280	32	812	317	813	317	813	317
429.mcf	32	766	381	768	380	765	381	32	631	462	632	462	632	462
445.gobmk	32	1041	323	1041	323	1041	323	32	930	361	931	361	931	361
456.hmmer	32	1108	270	1112	269	1109	269	16	463	322	464	322	464	322
458.sjeng	32	1485	261	1487	260	1486	261	32	1386	279	1387	279	1386	279
462.libquantum	32	314	2110	314	2110	315	2110	32	266	2490	266	2490	266	2490
464.h264ref	32	1368	518	1377	514	1366	518	32	1335	530	1333	531	1335	530
471.omnetpp	32	1044	192	1045	191	1047	191	32	911	219	911	219	912	219
473.astar	32	1016	221	1012	222	1014	222	32	930	242	929	242	930	242
483.xalancbmk	32	595	371	596	371	597	370	32	580	381	581	380	581	380

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

Processes were assigned to specific processors using 'pbind' commands.
The config file option 'submit' was used, along with a list of
processors in the 'BIND' variable, to generate the pbind commands.
(For details, please see the config file.)

Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack
(and therefore make more space available to the heap).

The "webconsole" service was turned off using svcadm disable webconsole.

Platform Notes

```
Sysinfo program /export/cpu2006-v1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on 1S-027-D0 Mon Apr 22 20:21:23 2013
```

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /usr/sbin/psrinfo
SPARC64-X (chipid 0, clock 2800 MHz)
1 chips
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-1

SPECint_rate2006 = 386

SPECint_rate_base2006 = 341

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2013

Hardware Availability: Mar-2013

Software Availability: Mar-2013

Platform Notes (Continued)

32 threads
2800 MHz

From kstat: 16 cores

From prtconf: 129280 Megabytes

/etc/release:
Oracle Solaris 11.1 SPARC
uname -a:
SunOS 1S-027-D0 5.11 11.1 sun4v sparc sun4v

disk: df -h \$SPEC
Filesystem Size Used Available Capacity Mounted on
rpool/export 547G 5.8G 468G 2% /export

(End of data from sysinfo program)

General Notes

output_root was used to put run directories in /tmp/cpu2006 (tmpfs).

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-fast -xtarget=sparc64x -fma=fused -xipo=2 -xpagesize=4M
-xalias_level=std -M /usr/lib/ld/map.bssalign

C++ benchmarks:
-fast -xtarget=sparc64x -fma=fused -xipo=2 -xppagesize=4M
-xalias_level=compatible -library=stlport4 -lfast

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-1

SPECint_rate2006 = 386

SPECint_rate_base2006 = 341

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2013

Hardware Availability: Mar-2013

Software Availability: Mar-2013

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-M /usr/lib/ld/map.bssalign

Base Other Flags

C benchmarks:

-xjobs=16

C++ benchmarks:

-xjobs=16

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xtarget=sparc64vii -xiwo=1
-xalias_level=std -xrestrict -xprefetch=no%auto -x04
-lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xalias_level=strong
-xprefetch=latx:0.2 -W2,-Ainline:rs=1000
-W2,-Ainline:cs=500 -W2,-Ainline:inc=60 -lfast

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-1

SPECint_rate2006 = 386

SPECint_rate_base2006 = 341

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2013

Hardware Availability: Mar-2013

Software Availability: Mar-2013

Peak Optimization Flags (Continued)

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xipo=2 -xprefetch_level=2
-xprefetch=latx:0.2

429.mcf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xipo=2 -xalias_level=std
-xprefetch_level=1 -xprefetch=latx:0.2
-xprefetch_auto_type=indirect_array_access

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xalias_level=std -xrestrict
-xprefetch=latx:0.2

456.hmmr: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xipo=1 -xalias_level=std
-xcache=32/128/4/1:704/128/22/1

458.sjeng: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xipo=2 -xalias_level=std
-xprefetch=no%auto -Wc,-Qlu-en=1-t=4

462.libquantum: -fast -xtarget=T5 -xppagesize=256M -xarch=sparcv2
-xcache=32/128/4/1:704/128/22/1 -xipo=2 -xalias_level=std
-xprefetch_level=2 -Wc,-Qlu-en=1-t=4
-Wc,-Qiselect-funcalign=64
-M /export/cpu2006-v1.2/mapfiles/map.256M.align -lbsdmalloc
-M /usr/lib/ld/map.bssalign

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xtarget=sparc64vii -xipo=1
-xalias_level=any -xprefetch=no%auto
-xcache=32/128/4/1:704/128/22/1

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xipo=1 -xalias_level=compatible
-xunroll=2 -xchip=generic -xprefetch_level=3
-library=stlport4 -lfast

473.astar: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=sparc64x
-fma=fused -xppagesize=4M -xipo=0 -xalias_level=compatible
-xunroll=6 -xprefetch=latx:0.8

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M10-1

SPECint_rate2006 = 386

SPECint_rate_base2006 = 341

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2013

Hardware Availability: Mar-2013

Software Availability: Mar-2013

Peak Optimization Flags (Continued)

473.astar (continued):

```
-xprefetch_auto_type=indirect_array_access -library=stlport4  
-lfast
```

483.xalancbmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=T5
-xpagesize=256M -xarch=sparcvis2
-xcache=32/128/4/1:704/128/22/1 -xalias_level=compatible
-xdepend -xiwo=2 -library=stlport4
-M /export/cpu2006-v1.2/mapfiles/map.256M.align -lfast

Peak Other Flags

C benchmarks:

```
-xjobs=16
```

C++ benchmarks:

```
-xjobs=16
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-SPARC64X.20130522.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-SPARC64X.20130522.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:26:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 May 2013.