



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 465

ProLiant DL380p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 451

CPU2006 license: 3


Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

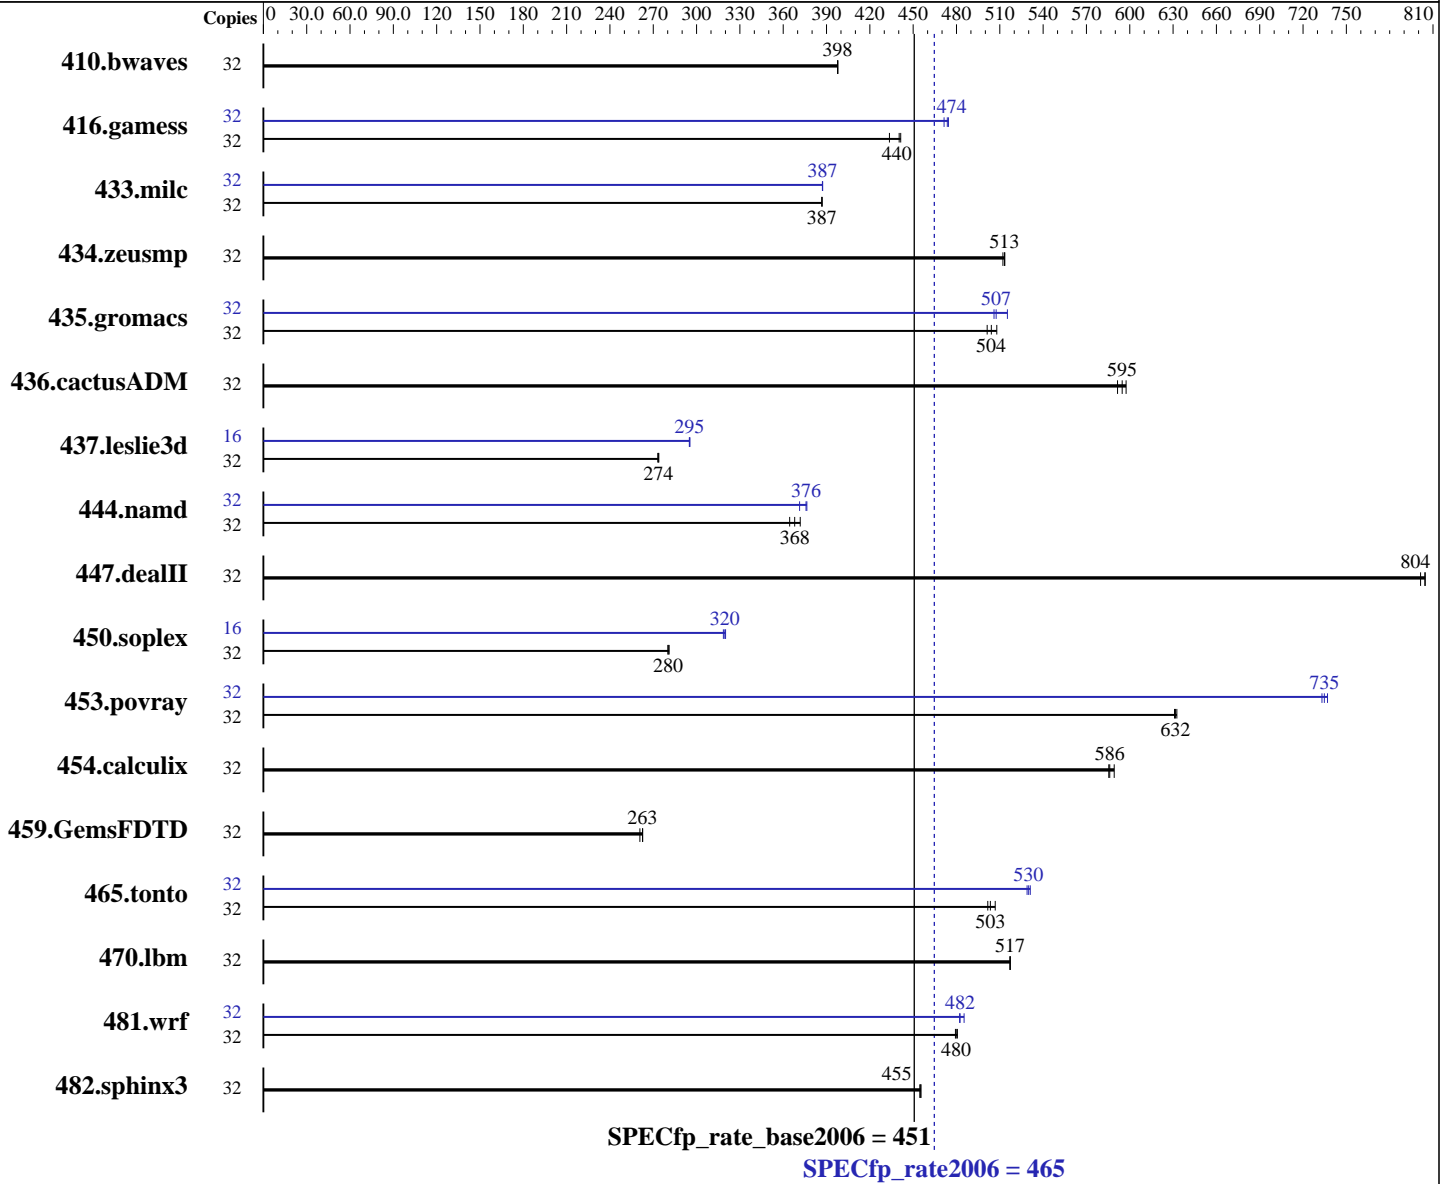

Hardware

CPU Name: Intel Xeon E5-2660
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux; Fortran: Version 13.0.0.133 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 465

ProLiant DL380p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 451

CPU2006 license: 3

Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB 15 K SAS
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1094	398	1094	398	1093	398	32	1094	398	1094	398	1093	398
416.gamess	32	1423	440	1420	441	1445	434	32	1321	474	1329	471	1323	474
433.milc	32	759	387	759	387	760	387	32	759	387	758	387	759	387
434.zeusmp	32	569	512	567	513	567	513	32	569	512	567	513	567	513
435.gromacs	32	453	504	456	501	450	508	32	452	506	443	515	450	507
436.cactusADM	32	640	597	646	592	643	595	32	640	597	646	592	643	595
437.leslie3d	32	1101	273	1098	274	1100	274	16	509	295	510	295	510	295
444.namd	32	704	364	697	368	690	372	32	683	376	691	371	682	376
447.dealII	32	455	805	455	804	457	801	32	455	805	455	804	457	801
450.soplex	32	950	281	953	280	952	280	16	419	319	417	320	418	320
453.povray	32	269	633	270	631	270	632	32	232	733	232	735	231	737
454.calculix	32	451	585	448	589	450	586	32	451	585	448	589	450	586
459.GemsFDTD	32	1302	261	1293	263	1293	263	32	1302	261	1293	263	1293	263
465.tonto	32	621	507	625	503	628	502	32	593	531	594	530	595	529
470.lbm	32	850	517	850	517	850	517	32	850	517	850	517	850	517
481.wrf	32	744	481	745	480	746	479	32	741	482	741	482	737	485
482.sphinx3	32	1372	455	1370	455	1370	455	32	1372	455	1370	455	1370	455

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Drive Write Cache set to Enabled in HP Array Configuration Utility

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 465

ProLiant DL380p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 451

CPU2006 license: 3

Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

Operating System Notes (Continued)

Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write in HP Array Configuration Utility

Platform Notes

BIOS configuration:

HP Power Profile set to Maximum Performance
Dynamic Power Capping set to Disabled
Memory Power Savings Mode set to Maximum Performance
Power-On Logo set to Disabled
ACPI SLIT Preferences set to Enabled

Sysinfo program /cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on dl380pGen8-rfp Fri Jun 7 05:04:00 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2660 0 @ 2.20GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 8
  siblings       : 16
  physical 0:    cores 0 1 2 3 4 5 6 7
  physical 1:    cores 0 1 2 3 4 5 6 7
 cache size      : 20480 KB
```

From /proc/meminfo

```
MemTotal:      132119388 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux dl380pGen8-rfp 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 6 15:52

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 465

ProLiant DL380p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 451

CPU2006 license: 3

Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

Platform Notes (Continued)

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	273G	58G	202G	23%	/

Additional information from dmidecode:

BIOS HP P70 03/01/2013

Memory:

16x HP Not Specified 8 GB 1600 MHz 2 rank
8x UNKNOWN Not Specified

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should have one line reading as:

16x HP Not Specified 8 GB 1600 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006/libs2/32:/cpu2006/libs2/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 465

ProLiant DL380p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 451

CPU2006 license: 3

Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 465

ProLiant DL380p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 451

CPU2006 license: 3

Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -static -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 465

ProLiant DL380p Gen8
(2.20 GHz, Intel Xeon E5-2660)

SPECfp_rate_base2006 = 451

CPU2006 license: 3

Test date: Jun-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2013

Tested by: Hewlett-Packard Company

Software Availability: Feb-2013

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.html>

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:23:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 July 2013.