



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECint®2006 = 53.0**

Huawei RH1288 V2 (Intel Xeon E5-2670 2.60 GHz)

**SPECint\_base2006 = 48.8**

CPU2006 license: 3175


Test date: May-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

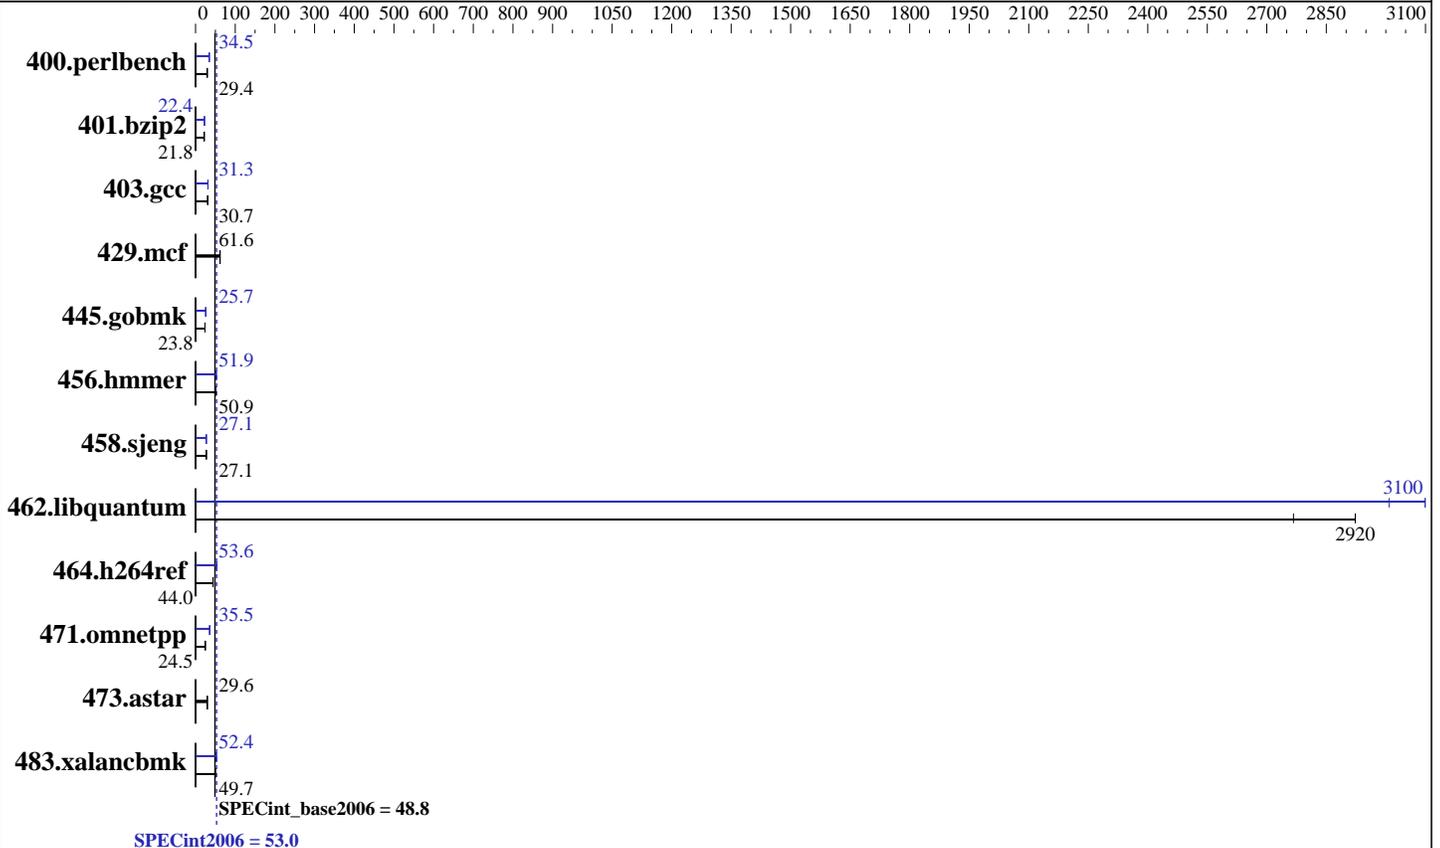

### Hardware

CPU Name: Intel Xeon E5-2670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint2006 = **53.0**

Huawei RH1288 V2 (Intel Xeon E5-2670 2.60 GHz)

SPECint\_base2006 = **48.8**

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2013  
Hardware Availability: May-2012  
Software Availability: Feb-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	333	29.4	332	29.4	<b><u>332</u></b>	<b><u>29.4</u></b>	283	34.5	<b><u>283</u></b>	<b><u>34.5</u></b>	283	34.6
401.bzip2	443	21.8	442	21.8	<b><u>443</u></b>	<b><u>21.8</u></b>	<b><u>431</u></b>	<b><u>22.4</u></b>	431	22.4	431	22.4
403.gcc	263	30.6	262	30.7	<b><u>263</u></b>	<b><u>30.7</u></b>	<b><u>257</u></b>	<b><u>31.3</u></b>	258	31.3	257	31.3
429.mcf	<b><u>148</u></b>	<b><u>61.6</u></b>	149	61.4	147	62.0	<b><u>148</u></b>	<b><u>61.6</u></b>	149	61.4	147	62.0
445.gobmk	441	23.8	440	23.8	<b><u>441</u></b>	<b><u>23.8</u></b>	409	25.7	409	25.7	<b><u>409</u></b>	<b><u>25.7</u></b>
456.hmmer	183	51.0	<b><u>183</u></b>	<b><u>50.9</u></b>	183	50.9	180	51.8	<b><u>180</u></b>	<b><u>51.9</u></b>	178	52.5
458.sjeng	446	27.1	<b><u>446</u></b>	<b><u>27.1</u></b>	446	27.2	447	27.1	<b><u>447</u></b>	<b><u>27.1</u></b>	447	27.1
462.libquantum	<b><u>7.09</u></b>	<b><u>2920</u></b>	7.49	2770	7.09	2920	6.89	3010	6.69	3100	<b><u>6.69</u></b>	<b><u>3100</u></b>
464.h264ref	503	44.0	<b><u>503</u></b>	<b><u>44.0</u></b>	504	43.9	<b><u>413</u></b>	<b><u>53.6</u></b>	417	53.1	413	53.6
471.omnetpp	254	24.6	<b><u>255</u></b>	<b><u>24.5</u></b>	256	24.4	175	35.8	176	35.4	<b><u>176</u></b>	<b><u>35.5</u></b>
473.astar	237	29.6	237	29.6	<b><u>237</u></b>	<b><u>29.6</u></b>	237	29.6	237	29.6	<b><u>237</u></b>	<b><u>29.6</u></b>
483.xalancbmk	138	50.1	<b><u>139</u></b>	<b><u>49.7</u></b>	139	49.5	<b><u>132</u></b>	<b><u>52.4</u></b>	132	52.4	132	52.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Baseboard Management Controller used to adjust the fan speed to 100%  
Intel Hyper Threading Technology = Disable  
Sysinfo program /spec/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost Fri May 17 17:12:36 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz  
2 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 8

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 53.0

Huawei RH1288 V2 (Intel Xeon E5-2670 2.60 GHz)

SPECint\_base2006 = 48.8

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132117844 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 17 17:11
```

```
SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       ext4      193G   46G  137G  26% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "16"
```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 53.0

Huawei RH1288 V2 (Intel Xeon E5-2670 2.60 GHz)

SPECint\_base2006 = 48.8

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2013  
Hardware Availability: May-2012  
Software Availability: Feb-2013

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
400.perlbench: icc -m32  
445.gobmk: icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 53.0

Huawei RH1288 V2 (Intel Xeon E5-2670 2.60 GHz)

SPECint\_base2006 = 48.8

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

## Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 53.0

Huawei RH1288 V2 (Intel Xeon E5-2670 2.60 GHz)

SPECint\_base2006 = 48.8

CPU2006 license: 3175

Test date: May-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Feb-2013

## Peak Optimization Flags (Continued)

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 16:29:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 July 2013.